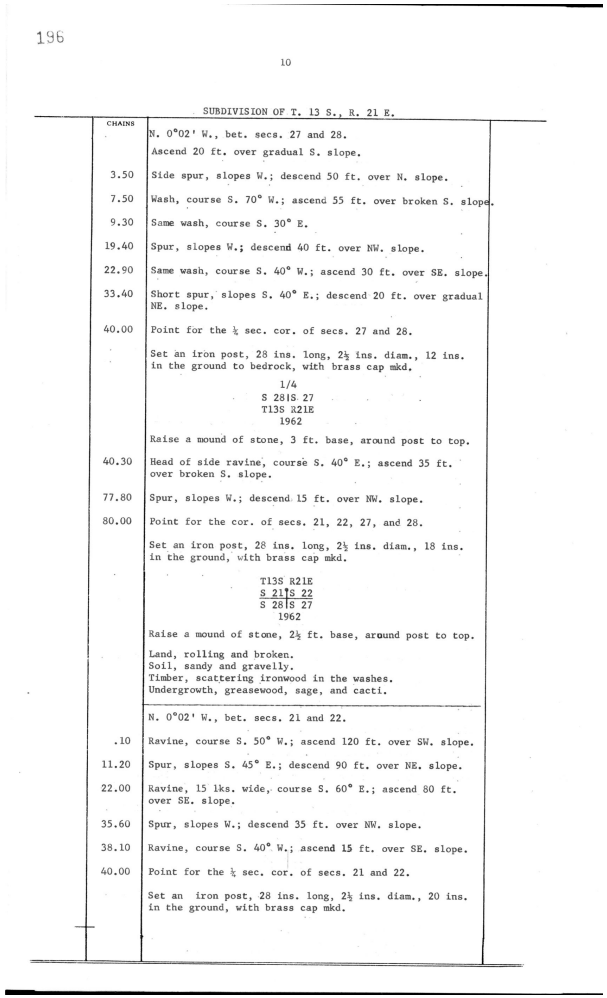


196

10

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
	N. 0°02' W., bet. secs. 27 and 28.
	Ascend 20 ft. over gradual S. slope.
3.50	Side spur, slopes W.; descend 50 ft. over N. slope.
7.50	Wash, course S. 70° W.; ascend 55 ft. over broken S. slope.
9.30	Same wash, course S. 30° E.
19.40	Spur, slopes W.; descend 40 ft. over NW. slope.
22.90	Same wash, course S. 40° W.; ascend 30 ft. over SE. slope.
33.40	Short spur, slopes S. 40° E.; descend 20 ft. over gradual NE. slope.
40.00	Point for the ¼ sec. cor. of secs. 27 and 28.
	Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. 1/4 S 28|S 27 T13S R21E 1962
	Raise a mound of stone, 3 ft. base, around post to top.
40.30	Head of side ravine, course S. 40° E.; ascend 35 ft. over broken S. slope.
77.80	Spur, slopes W.; descend 15 ft. over NW. slope.
80.00	Point for the cor. of secs. 21, 22, 27, and 28.
	Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd. T13S R21E S 21|S 22 S 28|S 27 1962
	Raise a mound of stone, 2½ ft. base, around post to top.
	Land, rolling and broken. Soil, sandy and gravelly. Timber, scattering ironwood in the washes. Undergrowth, greasewood, sage, and cacti.
	N. 0°02' W., bet. secs. 21 and 22.
.10	Ravine, course S. 50° W.; ascend 120 ft. over SW. slope.
11.20	Spur, slopes S. 45° E.; descend 90 ft. over NE. slope.
22.00	Ravine, 15 lks. wide, course S. 60° E.; ascend 80 ft. over SE. slope.
35.60	Spur, slopes W.; descend 35 ft. over NW. slope.
38.10	Ravine, course S. 40° W.; ascend 15 ft. over SE. slope.
40.00	Point for the ¼ sec. cor. of secs. 21 and 22.
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 17 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2			N. 0°02' W., bet. secs. 27 and 28.				
3		●	Ascend 20 ft. over gradual S. slope.				
4	3.50	●	Side spur, slopes W.; descend 50 ft. over N. slope.				
5	7.50	●	Wash · Wash, course S. 70° W.; ascend 55 ft. over broken S. slope.				
6	9.30	●	Same wash · Same wash, course S. 30° E.				
7	19.40	●	Spur, slopes W.; descend 40 ft. over NW. slope.				
8	22.90	●	Same wash · Same wash, course S. 40° W.; ascend 30 ft. over SE. slope.				
9	33.40	●	Short spur, slopes S. 40° E.; descend 20 ft. over gradual NE. slope.				
10	40.00	△	**¼ Cor. Sec. 27 N · Point for the ¼ sec. cor. of secs. 27 and 28. Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. 1/4 S 28|S 27 T13S R21E 1962 Raise a mound of stone, 3 ft. base, around post to top.**				440300
11	40.30	▼	Head of side ravine, course S. 40° E.; ascend 35 ft. over broken S. slope.				
12	77.80	●	Spur, slopes W.; descend 15 ft. over NW. slope.				
13	80.00	▲	**Cor. Secs. 21-22-27-28 · Point for the cor. of secs. 21, 22, 27, and 28. Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd. T13S R21E S 21|S 22 S 28|S 27 1962 Raise a mound of stone, 2½ ft. base, around post to top. Land, rolling and broken. Soil, sandy and gravelly. Timber, scattering ironwood in the washes. Undergrowth, greasewood, sage, and cacti. N. 0°02' W., bet. secs. 21 and 22.**				400300
14	0.10	▼	Ravine, course S. 50° W.; ascend 120 ft. over SW. slope.				
15	11.20	●	Spur, slopes S. 45° E.; descend 90 ft. over NE. slope.				
16	22.00	▼	Ravine, 15 lks. wide, course S. 60° E.; ascend 80 ft. over SE. slope.				
17	35.60	●	Spur, slopes W.; descend 35 ft. over NW. slope.				
18	38.10	▼	Ravine, course S. 40° W.; ascend 15 ft. over SE. slope.				
19	40.00	△	**¼ Cor. Sec. 21 N · Point for the ¼ sec. cor. of secs. 21 and 22. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.**				340400

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Sections 27 & 28 · N. 0°02' W.

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 27

GCDB code: 440300

NOTABLE CALLS ALONG RUN

ch 7.50 Wash — Wash, course S. 70° W.; ascend 55 ft. over broken S. slope.
ch 9.30 Same wash — Same wash, course S. 30° E.
ch 22.90 Same wash — Same wash, course S. 40° W.; ascend 30 ft. over SE. slope.
ch 40.00 ¼ corner, Sec. 21

END CORNER (ch 80.00)

Corner, Secs. 21, 22, 27 & 28

GCDB code: 400300

16 total calls · 0 geo-located · 0 with elevation

TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE · Sections: 27 · 28 · N. 0°02' W.

Run Geolocate on this document to generate the elevation profile.