
T8N R15E

CA · Amador County · 22 document(s) · Generated 11/2/2026

244 calls · 0 geo-located · 0 terrain flags · 0 verifications

Source review: conflicting or unverified locations are withheld. Original scans and transcriptions are preserved; missing positions are not estimated.

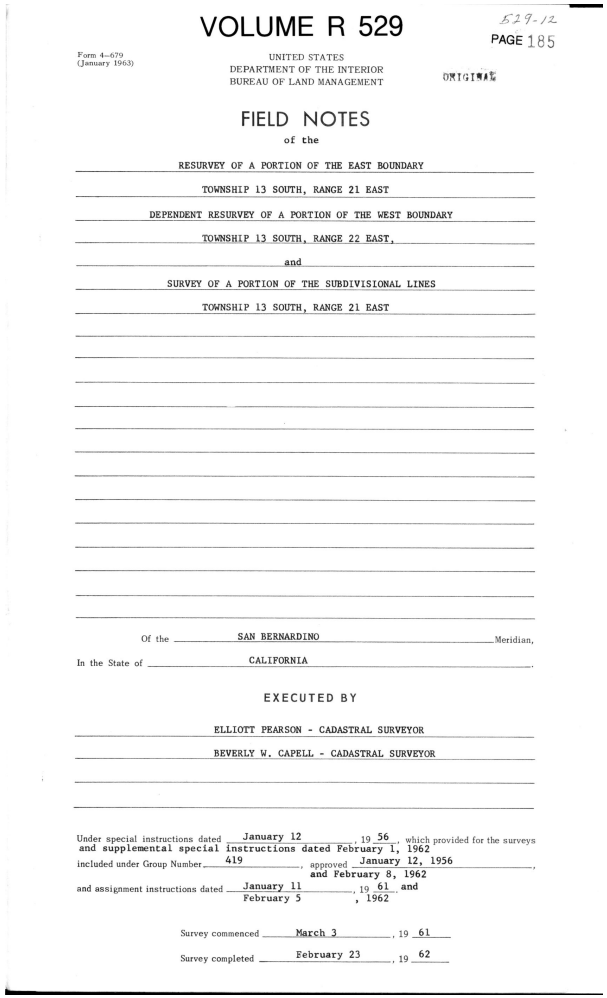

VOLUME R 529

529-12

PAGE 185

Form 4–679
(January 1963)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES
of the

RESURVEY OF A PORTION OF THE EAST BOUNDARY

TOWNSHIP 13 SOUTH, RANGE 21 EAST

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY

TOWNSHIP 13 SOUTH, RANGE 22 EAST,

and

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

TOWNSHIP 13 SOUTH, RANGE 21 EAST

Of the SAN BERNARDINO Meridian,

In the State of CALIFORNIA.

EXECUTED BY

ELLIOTT PEARSON - CADASTRAL SURVEYOR

BEVERLY W. CAPELL - CADASTRAL SURVEYOR

Under special instructions dated January 12, 19 56, which provided for the surveys and supplemental special instructions dated February 1, 1962 included under Group Number 419, approved January 12, 1956 and February 8, 1962 and assignment instructions dated January 11, 19 61 and February 5, 1962

Survey commenced March 3, 19 61

Survey completed February 23, 19 62

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	VOLUME R 529 529-12 PAGE 185 Form 4-679 (January 1963) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT ORIGINAL FIELD NOTES of the RESURVEY OF A PORTION OF THE EAST BOUNDARY TOWNSHIP 13 SOUTH, RANGE 21 EAST DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY TOWNSHIP 13 SOUTH, RANGE 22 EAST, and SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES TOWNSHIP 13 SOUTH, RANGE 21 EAST Of the SAN BERNARDINO Meridian, In the State of CALIFORNIA EXECUTED BY ELLIOTT PEARSON - CADASTRAL SURVEYOR BEVERLY W. CAPELL - CADASTRAL SURVEYOR Under special instructions dated January 12, 19 56, which provided for the surveys and supplemental special instructions dated February 1, 1962 included under Group Number 419, approved January 12, 1956 and February 8, 1962 and assignment instructions dated January 11, 19 61 and February 5, 1962 Survey commenced March 3, 19 61 Survey completed February 23, 19 62				

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

0 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

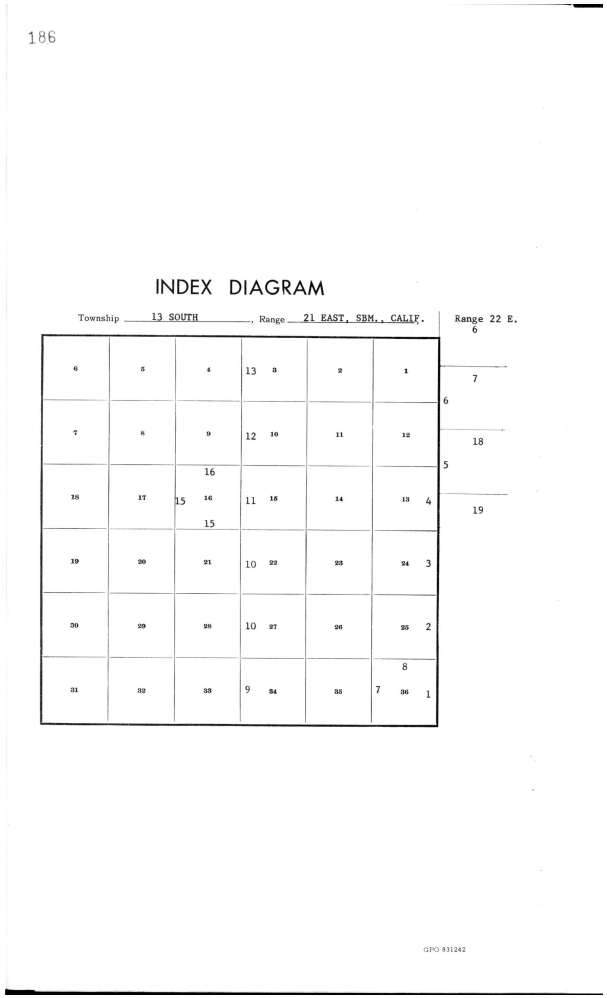

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	186 INDEX DIAGRAM Township 13 SOUTH, Range 21 EAST, SBM., CALIF. Range 22 E. 6 5 4 | 13 3 2 1 7 8 9 | 12 10 11 12 18 17 15| 16 11 15 14 13 4 19 20 21 10|22 23 24 3 30 29 28 10|27 26 25 2 31 32 33 9|34 35 7| 36 1 8 (above 36) GPO 831242				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

0 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

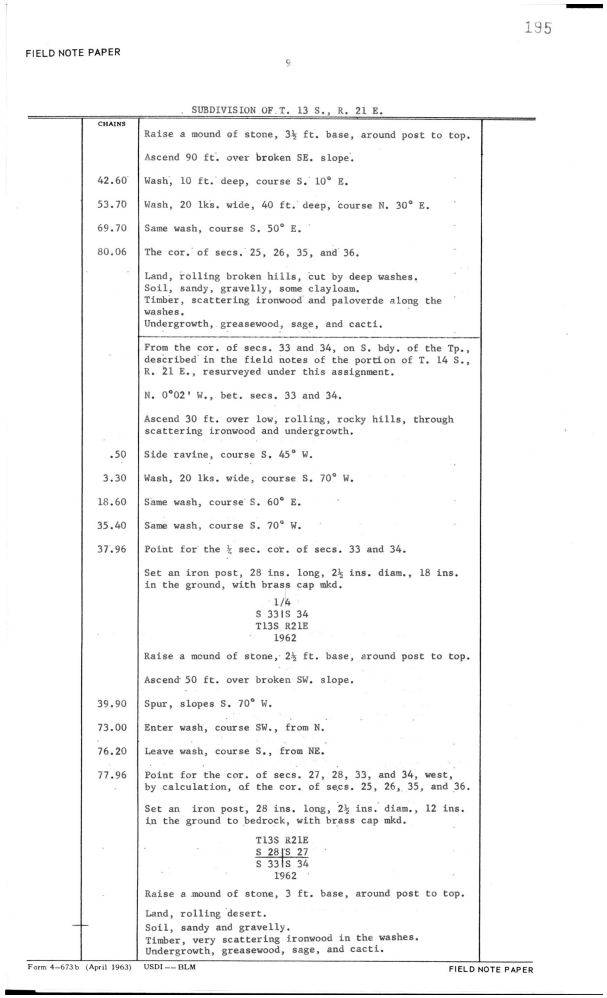

195

FIELD NOTE PAPER

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
	Raise a mound of stone, 3½ ft. base, around post to top.
	Ascend 90 ft. over broken SE. slope.
42.60	Wash, 10 ft. deep, course S. 10° E.
53.70	Wash, 20 lks. wide, 40 ft. deep, course N. 30° E.
69.70	Same wash, course S. 50° E.
80.06	The cor. of secs. 25, 26, 35, and 36.
	Land, rolling broken hills, cut by deep washes. Soil, sandy, gravelly, some clayloam. Timber, scattering ironwood and paloverde along the washes. Undergrowth, greasewood, sage, and cacti.
	From the cor. of secs. 33 and 34, on S. bdy. of the Tp., described in the field notes of the portion of T. 14 S., R. 21 E., resurveyed under this assignment.
	N. 0°02' W., bet. secs. 33 and 34.
	Ascend 30 ft. over low, rolling, rocky hills, through scattering ironwood and undergrowth.
.50	Side ravine, course S. 45° W.
3.30	Wash, 20 lks. wide, course S. 70° W.
18.60	Same wash, course S. 60° E.
35.40	Same wash, course S. 70° W.
37.96	Point for the ¼ sec. cor. of secs. 33 and 34.
	Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd. 1/4 S 33|S 34 T13S R21E 1962
	Raise a mound of stone, 2½ ft. base, around post to top.
	Ascend 50 ft. over broken SW. slope.
39.90	Spur, slopes S. 70° W.
73.00	Enter wash, course SW., from N.
76.20	Leave wash, course S., from NE.
77.96	Point for the cor. of secs. 27, 28, 33, and 34, west, by calculation, of the cor. of secs. 25, 26, 35, and 36.
	Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. T13S R21E S 28|S 27 S 33|S 34 1962
	Raise a mound of stone, 3 ft. base, around post to top.
	Land, rolling desert. Soil, sandy and gravelly. Timber, very scattering ironwood in the washes. Undergrowth, greasewood, sage, and cacti.

Form 4—673b (April 1963) USDI — BLM FIELD NOTE PAPER

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2		●	Raise a mound of stone, 3½ ft. base, around post to top.				
3		●	Ascend 90 ft. over broken SE. slope.				
4	42.60	●	Wash, 10 ft. deep, course S. 10° E.				
5	53.70	●	Wash, 20 lks. wide, 40 ft. deep, course N. 30° E.				
6	69.70	●	Same wash, course S. 50° E.				
7	80.06	▲	**Cor. Secs. 25-26-35-36 · The cor. of secs. 25, 26, 35, and 36. Land, rolling broken hills, cut by deep washes. Soil, sandy, gravelly, some clayloam. Timber, scattering ironwood and paloverde along the washes. Undergrowth, greasewood, sage, and cacti. From the cor. of secs. 33 and 34, on S. bdy. of the Tp., described in the field notes of the portion of T. 14 S., R. 21 E., resurveyed under this assignment. N. 0°02' W., bet. secs. 33 and 34. Ascend 30 ft. over low, rolling, rocky hills, through scattering ironwood and undergrowth.**				600200
8	0.50	▼	Side ravine, course S. 45° W.				
9	3.30	●	Wash, 20 lks. wide, course S. 70° W.				
10	18.60	●	Same wash, course S. 60° E.				
11	35.40	●	Same wash, course S. 70° W.				
12	37.96	△	**Cor. Secs. 33-34 · Point for the ¼ sec. cor. of secs. 33 and 34. Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd. 1/4 S 33|S 34 T13S R21E 1962 Raise a mound of stone, 2½ ft. base, around post to top. Ascend 50 ft. over broken SW. slope.**				400100
13	39.90	●	Spur, slopes S. 70° W.				
14	73.00	●	Enter wash, course SW., from N.				
15	76.20	●	Leave wash, course S., from NE.				
16	77.96	▲	**Cor. Secs. 25-26-35-36 · Point for the cor. of secs. 27, 28, 33, and 34, west, by calculation, of the cor. of secs. 25, 26, 35, and 36. Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. T13S R21E S 28|S 27 S 33|S 34 1962 Raise a mound of stone, 3 ft. base, around post to top. Land, rolling desert. Soil, sandy and gravelly. Timber, very scattering ironwood in the washes. Undergrowth, greasewood, sage, and cacti.**				600200

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 15 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Secs. 33 & 34

GCDB code: 400100

NOTABLE CALLS ALONG RUN

ch 3.30 Wash, 20 lks. wide, course S. 70° W. — Wash, 20 lks. wide, course S. 70° W.
ch 18.60 Same wash, course S. 60° E. — Same wash, course S. 60° E.
ch 35.40 Same wash, course S. 70° W. — Same wash, course S. 70° W.
ch 42.60 Wash, 10 ft. deep, course S. 10° E. — Wash, 10 ft. deep, course S. 10° E.
ch 53.70 Wash, 20 lks. wide, 40 ft. deep, course N. 30° E. — Wash, 20 lks. wide, 40 ft. deep, course N. 30° E.
ch 69.70 Same wash, course S. 50° E. — Same wash, course S. 50° E.
ch 73.00 Enter wash, course SW., from N. — Enter wash, course SW., from N.
ch 76.20 Leave wash, course S., from NE. — Leave wash, course S., from NE.
ch 77.96 Corner, Secs. 25, 26, 35 & 36

END CORNER (ch 80.06)

Corner, Secs. 25, 26, 35 & 36

GCDB code: 600200

13 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

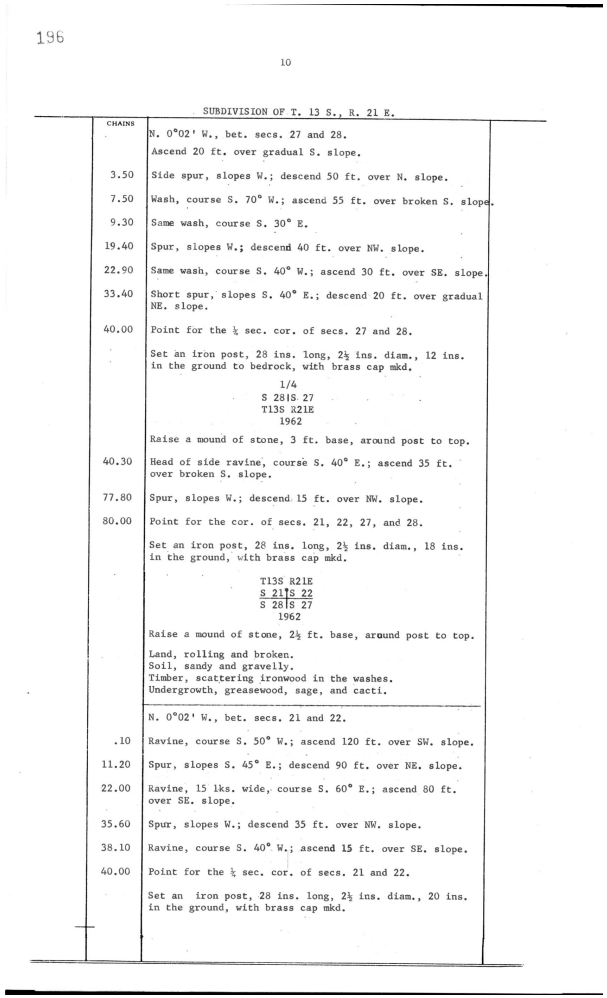

196

10

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
	N. 0°02' W., bet. secs. 27 and 28.
	Ascend 20 ft. over gradual S. slope.
3.50	Side spur, slopes W.; descend 50 ft. over N. slope.
7.50	Wash, course S. 70° W.; ascend 55 ft. over broken S. slope.
9.30	Same wash, course S. 30° E.
19.40	Spur, slopes W.; descend 40 ft. over NW. slope.
22.90	Same wash, course S. 40° W.; ascend 30 ft. over SE. slope.
33.40	Short spur, slopes S. 40° E.; descend 20 ft. over gradual NE. slope.
40.00	Point for the ¼ sec. cor. of secs. 27 and 28.
	Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. 1/4 S 28|S 27 T13S R21E 1962
	Raise a mound of stone, 3 ft. base, around post to top.
40.30	Head of side ravine, course S. 40° E.; ascend 35 ft. over broken S. slope.
77.80	Spur, slopes W.; descend 15 ft. over NW. slope.
80.00	Point for the cor. of secs. 21, 22, 27, and 28.
	Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd. T13S R21E S 21|S 22 S 28|S 27 1962
	Raise a mound of stone, 2½ ft. base, around post to top.
	Land, rolling and broken. Soil, sandy and gravelly. Timber, scattering ironwood in the washes. Undergrowth, greasewood, sage, and cacti.
	N. 0°02' W., bet. secs. 21 and 22.
.10	Ravine, course S. 50° W.; ascend 120 ft. over SW. slope.
11.20	Spur, slopes S. 45° E.; descend 90 ft. over NE. slope.
22.00	Ravine, 15 lks. wide, course S. 60° E.; ascend 80 ft. over SE. slope.
35.60	Spur, slopes W.; descend 35 ft. over NW. slope.
38.10	Ravine, course S. 40° W.; ascend 15 ft. over SE. slope.
40.00	Point for the ¼ sec. cor. of secs. 21 and 22.
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 17 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2			N. 0°02' W., bet. secs. 27 and 28.				
3		●	Ascend 20 ft. over gradual S. slope.				
4	3.50	●	Side spur, slopes W.; descend 50 ft. over N. slope.				
5	7.50	●	Wash · Wash, course S. 70° W.; ascend 55 ft. over broken S. slope.				
6	9.30	●	Same wash · Same wash, course S. 30° E.				
7	19.40	●	Spur, slopes W.; descend 40 ft. over NW. slope.				
8	22.90	●	Same wash · Same wash, course S. 40° W.; ascend 30 ft. over SE. slope.				
9	33.40	●	Short spur, slopes S. 40° E.; descend 20 ft. over gradual NE. slope.				
10	40.00	△	**¼ Cor. Sec. 27 N · Point for the ¼ sec. cor. of secs. 27 and 28. Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. 1/4 S 28|S 27 T13S R21E 1962 Raise a mound of stone, 3 ft. base, around post to top.**				440300
11	40.30	▼	Head of side ravine, course S. 40° E.; ascend 35 ft. over broken S. slope.				
12	77.80	●	Spur, slopes W.; descend 15 ft. over NW. slope.				
13	80.00	▲	**Cor. Secs. 21-22-27-28 · Point for the cor. of secs. 21, 22, 27, and 28. Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd. T13S R21E S 21|S 22 S 28|S 27 1962 Raise a mound of stone, 2½ ft. base, around post to top. Land, rolling and broken. Soil, sandy and gravelly. Timber, scattering ironwood in the washes. Undergrowth, greasewood, sage, and cacti. N. 0°02' W., bet. secs. 21 and 22.**				400300
14	0.10	▼	Ravine, course S. 50° W.; ascend 120 ft. over SW. slope.				
15	11.20	●	Spur, slopes S. 45° E.; descend 90 ft. over NE. slope.				
16	22.00	▼	Ravine, 15 lks. wide, course S. 60° E.; ascend 80 ft. over SE. slope.				
17	35.60	●	Spur, slopes W.; descend 35 ft. over NW. slope.				
18	38.10	▼	Ravine, course S. 40° W.; ascend 15 ft. over SE. slope.				
19	40.00	△	**¼ Cor. Sec. 21 N · Point for the ¼ sec. cor. of secs. 21 and 22. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.**				340400

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Sections 27 & 28 · N. 0°02' W.

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 27

GCDB code: 440300

NOTABLE CALLS ALONG RUN

ch 7.50 Wash — Wash, course S. 70° W.; ascend 55 ft. over broken S. slope.
ch 9.30 Same wash — Same wash, course S. 30° E.
ch 22.90 Same wash — Same wash, course S. 40° W.; ascend 30 ft. over SE. slope.
ch 40.00 ¼ corner, Sec. 21

END CORNER (ch 80.00)

Corner, Secs. 21, 22, 27 & 28

GCDB code: 400300

16 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE · Sections: 27 · 28 · N. 0°02' W.

Run Geolocate on this document to generate the elevation profile.

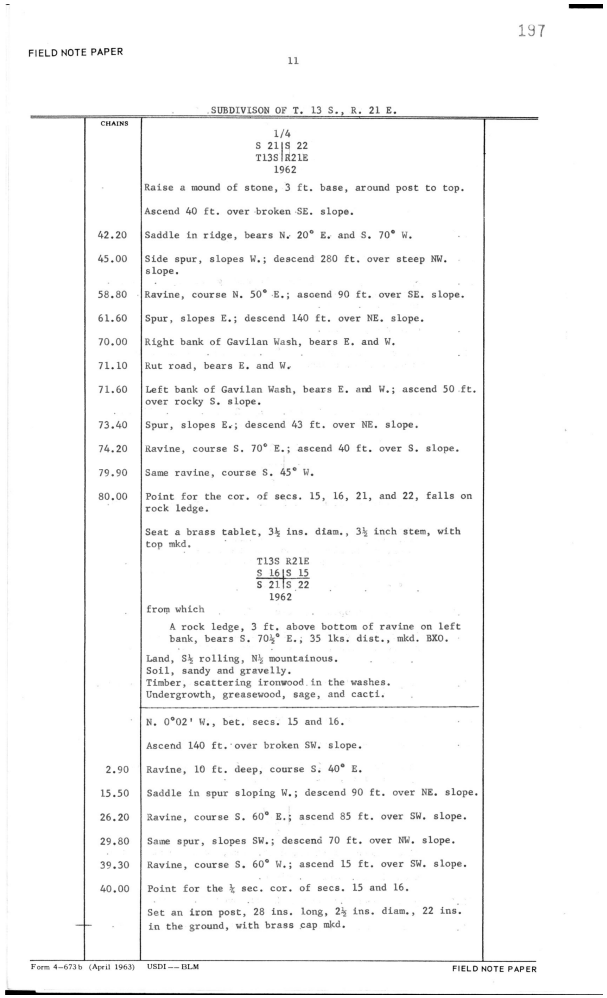

197

FIELD NOTE PAPER

11

SUBDIVISON OF T. 13 S., R. 21 E.

CHAINS	
	1/4 S 21|S 22 T13S|R21E 1962
	Raise a mound of stone, 3 ft. base, around post to top.
	Ascend 40 ft. over broken SE. slope.
42.20	Saddle in ridge, bears N. 20° E. and S. 70° W.
45.00	Side spur, slopes W.; descend 280 ft. over steep NW. slope.
58.80	Ravine, course N. 50° E.; ascend 90 ft. over SE. slope.
61.60	Spur, slopes E.; descend 140 ft. over NE. slope.
70.00	Right bank of Gavilan Wash, bears E. and W.
71.10	Rut road, bears E. and W.
71.60	Left bank of Gavilan Wash, bears E. and W.; ascend 50 ft. over rocky S. slope.
73.40	Spur, slopes E.; descend 43 ft. over NE. slope.
74.20	Ravine, course S. 70° E.; ascend 40 ft. over S. slope.
79.90	Same ravine, course S. 45° W.
80.00	Point for the cor. of secs. 15, 16, 21, and 22, falls on rock ledge. Seat a brass tablet, 3½ ins. diam., 3½ inch stem, with top mkd. T13S R21E S 16|S 15 S 21|S 22 1962 from which A rock ledge, 3 ft. above bottom of ravine on left bank, bears S. 70½° E., 35 lks. dist., mkd. BXO. Land, S½ rolling, N½ mountainous. Soil, sandy and gravelly. Timber, scattering ironwood in the washes. Undergrowth, greasewood, sage, and cacti.
	N. 0°02' W., bet. secs. 15 and 16.
	Ascend 140 ft. over broken SW. slope.
2.90	Ravine, 10 ft. deep, course S. 40° E.
15.50	Saddle in spur sloping W.; descend 90 ft. over NE. slope.
26.20	Ravine, course S. 60° E.; ascend 85 ft. over SW. slope.
29.80	Same spur, slopes SW.; descend 70 ft. over NW. slope.
39.30	Ravine, course S. 60° W.; ascend 15 ft. over SW. slope.
40.00	Point for the ¼ sec. cor. of secs. 15 and 16. Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

Form 4–673b (April 1963) USDI — BLM FIELD NOTE PAPER

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 19 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISON OF T. 13 S., R. 21 E.				
2			1/4 S 21|S 22 T13S|R21E 1962				
3		●	Raise a mound of stone, 3 ft. base, around post to top.				
4		●	Ascend 40 ft. over broken SE. slope.				
5	42.20	●	Saddle in ridge, bears N. 20° E. and S. 70° W.				
6	45.00	●	Side spur, slopes W.; descend 280 ft. over steep NW. slope.				
7	58.80	▼	Ravine, course N. 50° E.; ascend 90 ft. over SE. slope.				
8	61.60	●	Spur, slopes E.; descend 140 ft. over NE. slope.				
9	70.00	●	Right bank of Gavilan Wash, bears E. and W.				
10	71.10	■	Rut road, bears E. and W.				
11	71.60	●	Left bank of Gavilan Wash, bears E. and W. · Left bank of Gavilan Wash, bears E. and W.; ascend 50 ft. over rocky S. slope.				
12	73.40	●	Spur, slopes E.; descend 43 ft. over NE. slope.				
13	74.20	▼	Ravine, course S. 70° E.; ascend 40 ft. over S. slope.				
14	79.90	▼	Same ravine, course S. 45° W.				
15	80.00	▲	**Cor. Secs. 15-16-21-22 · Point for the cor. of secs. 15, 16, 21, and 22, falls on rock ledge. Seat a brass tablet, 3½ ins. diam., 3½ inch stem, with top mkd. T13S R21E S 16|S 15 S 21| S 22 1962 from which A rock ledge, 3 ft. above bottom of ravine on left bank, bears S. 70½° E., 35 lks. dist., mkd. BXO. Land, S½ rolling, N½ mountainous. Soil, sandy and gravelly. Timber, scattering ironwood in the washes. Undergrowth, greasewood, sage, and cacti. N. 0°02' W., bet. secs. 15 and 16. Ascend 140 ft. over broken SW. slope.**				400400
16	2.90	▼	Ravine, 10 ft. deep, course S. 40° E.				
17	15.50	●	Saddle in spur sloping W.; descend 90 ft. over NE. slope.				
18	26.20	▼	Ravine, course S. 60° E.; ascend 85 ft. over SW. slope.				
19	29.80	●	Same spur, slopes SW.; descend 70 ft. over NW. slope.				
20	39.30	▼	Ravine, course S. 60° W.; ascend 15 ft. over SW. slope.				
21	40.00	△	**¼ Cor. Sec. 15 N · Point for the ¼ sec. cor. of secs. 15 and 16. Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.**				400440

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 15

GCDB code: 400440

NOTABLE CALLS ALONG RUN

ch 70.00 Right bank of Gavilan Wash, bears E. and W. — Right bank of Gavilan Wash, bears E. and W.

ch 71.60 Left bank of Gavilan Wash, bears E. and W. — Left bank of Gavilan Wash, bears E. and W.; ascend 50 ft. over rocky S. slope.

END CORNER (ch 80.00)

Corner, Secs. 15, 16, 21 & 22

GCDB code: 400400

17 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

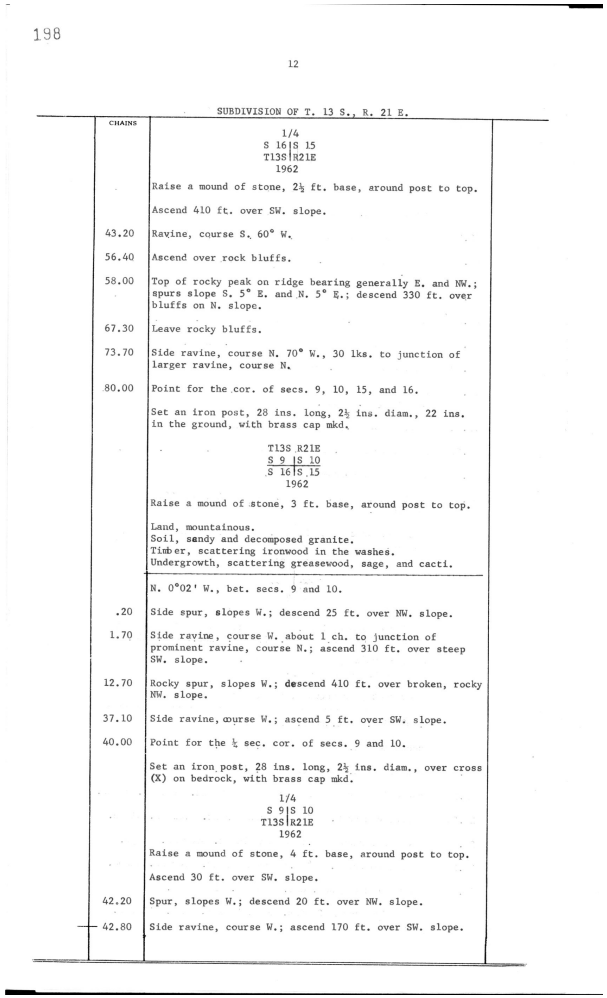

198

12

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
	1/4 S 16|S 15 T13S|R21E 1962
	Raise a mound of stone, 2½ ft. base, around post to top.
	Ascend 410 ft. over SW. slope.
43.20	Ravine, course S. 60° W.
56.40	Ascend over rock bluffs.
58.00	Top of rocky peak on ridge bearing generally E. and NW.; spurs slope S. 5° E. and N. 5° E.; descend 330 ft. over bluffs on N. slope.
67.30	Leave rocky bluffs.
73.70	Side ravine, course N. 70° W., 30 lks. to junction of larger ravine, course N.
80.00	Point for the cor. of secs. 9, 10, 15, and 16.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	T13S R21E S 9 |S 10 S 16|S 15 1962
	Raise a mound of stone, 3 ft. base, around post to top.
	Land, mountainous. Soil, sandy and decomposed granite. Timber, scattering ironwood in the washes. Undergrowth, scattering greasewood, sage, and cacti.
	N. 0°02' W., bet. secs. 9 and 10.
.20	Side spur, slopes W.; descend 25 ft. over NW. slope.
1.70	Side ravine, course W. about 1 ch. to junction of prominent ravine, course N.; ascend 310 ft. over steep SW. slope.
12.70	Rocky spur, slopes W.; descend 410 ft. over broken, rocky NW. slope.
37.10	Side ravine, course W.; ascend 5 ft. over SW. slope.
40.00	Point for the ¼ sec. cor. of secs. 9 and 10.
	Set an iron post, 28 ins. long, 2½ ins. diam., over cross (X) on bedrock, with brass cap mkd.
	1/4 S 9|S 10 T13S|R21E 1962
	Raise a mound of stone, 4 ft. base, around post to top.
	Ascend 30 ft. over SW. slope.
42.20	Spur, slopes W.; descend 20 ft. over NW. slope.
42.80	Side ravine, course W.; ascend 170 ft. over SW. slope.

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 13 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2			1/4 S 16|S 15 T13S|R21E 1962				
3			Raise a mound of stone, 2½ ft. base, around post to top.				
4			Ascend 410 ft. over SW. slope.				
5	43.20	●	Ravine, course S. 60° W.				
6	56.40	●	Ascend over rock bluffs.				
7	58.00	●	Top of rocky peak on ridge bearing generally E. and NW.; spurs slope S. 5° E. and N. 5° E.; descend 330 ft. over bluffs on N. slope.				
8	67.30	●	Leave rocky bluffs.				
9	73.70	●	Side ravine, course N. 70° W., 30 lks. to junction of larger ravine, course N.				
10	80.00	▲	**Cor. Secs. 9-10-15-16 · Point for the cor. of secs. 9, 10, 15, and 16. Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd. T13S R21E S 9 |S 10 S 16|S 15 1962 Raise a mound of stone, 3 ft. base, around post to top. Land, mountainous. Soil, sandy and decomposed granite. Timber, scattering ironwood in the washes. Undergrowth, scattering greasewood, sage, and cacti. N. 0°02' W., bet. secs. 9 and 10.**				400500
11	0.20	●	Side spur, slopes W.; descend 25 ft. over NW. slope.				
12	1.70	●	Side ravine, course W. about 1 ch. to junction of prominent ravine, course N. · Side ravine, course W. about 1 ch. to junction of prominent ravine, course N.; ascend 310 ft. over steep SW. slope.				
13	12.70	●	Rocky spur, slopes W.; descend 410 ft. over broken, rocky NW. slope.				
14	37.10	●	Side ravine, course W. · Side ravine, course W.; ascend 5 ft. over SW. slope.				
15	40.00	△	**¼ Cor. Sec. 9 N · Point for the ¼ sec. cor. of secs. 9 and 10. Set an iron post, 28 ins. long, 2½ ins. diam., over cross (X) on bedrock, with brass cap mkd. 1/4 S 9|S 10 T13S|R21E 1962 Raise a mound of stone, 4 ft. base, around post to top. Ascend 30 ft. over SW. slope.**				340600
16	42.20	●	Spur, slopes W.; descend 20 ft. over NW. slope.				
17	42.80	●	Side ravine, course W. · Side ravine, course W.; ascend 170 ft. over SW. slope.				

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 9

GCDB code: 340600

NOTABLE CALLS ALONG RUN

ch 1.70 Side ravine, course W. about 1 ch. to junction of prominent ravine, course N. — Side ravine, course W. about 1 ch. to junction of prominent ravine, course N.; ascend 910 ft. over steep SW. slope.

ch 37.10 Side ravine, course W. — Side ravine, course W.; ascend 5 ft. over SW. slope.

ch 42.80 Side ravine, course W. — Side ravine, course W.; ascend 170 ft. over SW. slope.

ch 43.20 Ravine, course S. 60° W. — Ravine, course S. 60° W.

ch 73.70 Side ravine, course N. 70° W., 30 lks. to junction of larger ravine, course N. — Side ravine, course N. 70° W., 30 lks. to junction of larger ravine, course N.

END CORNER (ch 80.00)

Corner, Secs. 9, 10, 15 & 16

GCDB code: 400500

13 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

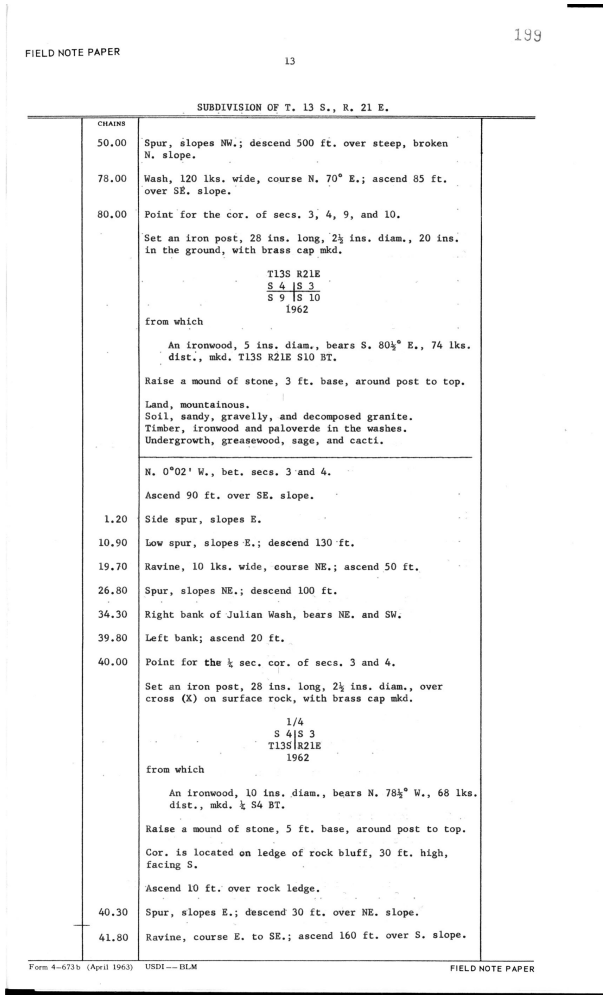

199

FIELD NOTE PAPER

13

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
50.00	Spur, slopes NW.; descend 500 ft. over steep, broken N. slope.
78.00	Wash, 120 lks. wide, course N. 70° E.; ascend 85 ft. over SE. slope.
80.00	Point for the cor. of secs. 3, 4, 9, and 10. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. T13S R21E S 4 |S 3 S 9 |S 10 1962 from which An ironwood, 5 ins. diam., bears S. 80½° E., 74 lks. dist., mkd. T13S R21E S10 BT. Raise a mound of stone, 3 ft. base, around post to top. Land, mountainous. Soil, sandy, gravelly, and decomposed granite. Timber, ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti.
	N. 0°02' W., bet. secs. 3 and 4. Ascend 90 ft. over SE. slope.
1.20	Side spur, slopes E.
10.90	Low spur, slopes E.; descend 130 ft.
19.70	Ravine, 10 lks. wide, course NE.; ascend 50 ft.
26.80	Spur, slopes NE.; descend 100 ft.
34.30	Right bank of Julian Wash, bears NE. and SW.
39.80	Left bank; ascend 20 ft.
40.00	Point for the ¼ sec. cor. of secs. 3 and 4. Set an iron post, 28 ins. long, 2½ ins. diam., over cross (X) on surface rock, with brass cap mkd. 1/4 S 4|S 3 T13S|R21E 1962 from which An ironwood, 10 ins. diam., bears N. 78½° W., 68 lks. dist., mkd. ¼ S4 BT. Raise a mound of stone, 5 ft. base, around post to top. Cor. is located on ledge of rock bluff, 30 ft. high, facing S. Ascend 10 ft. over rock ledge.
40.30	Spur, slopes E.; descend 30 ft. over NE. slope.
41.80	Ravine, course E. to SE.; ascend 160 ft. over S. slope.

Form 4–673b (April 1963) USDI — BLM FIELD NOTE PAPER

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 12 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2	50.00	●	Spur, slopes NW.; descend 500 ft. over steep, broken N. slope.				
3	78.00	◉	Wash, 120 lks. wide, course N. 70° E. · Wash, 120 lks. wide, course N. 70° E.; ascend 85 ft. over SE. slope.				
4	80.00	▲	**Cor. Secs. 3-4-9-10 · Point for the cor. of secs. 3, 4, 9, and 10. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. T13S R21E S 4 |S 3 S 9 |S 10 1962 from which An ironwood, 5 ins. diam., bears S. 80½° E., 74 lks. dist., mkd. T13S R21E S10 BT. Raise a mound of stone, 3 ft. base, around post to top. Land, mountainous. Soil, sandy, gravelly, and decomposed granite. Timber, ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti. N. 0°02' W., bet. secs. 3 and 4. Ascend 90 ft. over SE. slope.**				400600
5	1.20	●	Side spur, slopes E.				
6	10.90	●	Low spur, slopes E.; descend 130 ft.				
7	19.70	▼	Ravine, 10 lks. wide, course NE.; ascend 50 ft.				
8	26.80	●	Spur, slopes NE.; descend 100 ft.				
9	34.30	◉	Right bank of Julian Wash, bears NE. and SW.				
10	39.80	◉	Left bank · Left bank; ascend 20 ft.				
11	40.00	△	**Cor. Secs. 3-4 · Point for the ¼ sec. cor. of secs. 3 and 4. Set an iron post, 28 ins. long, 2½ ins. diam., over cross (X) on surface rock, with brass cap mkd. 1/4 S 4|S 3 T13S|R21E 1962 from which An ironwood, 10 ins. diam., bears N. 78½° W., 68 lks. dist., mkd. ¼ S4 BT. Raise a mound of stone, 5 ft. base, around post to top. Cor. is located on ledge of rock bluff, 30 ft. high, facing S. Ascend 10 ft. over rock ledge.**				400700
12	40.30	●	Spur, slopes E.; descend 30 ft. over NE. slope.				
13	41.80	▼	Ravine, course E. to SE.; ascend 160 ft. over S. slope.				

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Secs. 3 & 4

GCDB code: 400700

NOTABLE CALLS ALONG RUN

ch 34.30 Right bank of Julian Wash, bears NE. and SW. — Right bank of Julian Wash, bears NE. and SW.

ch 39.80 Left bank — Left bank; ascend 20 ft.

ch 78.00 Wash, 120 lks. wide, course N. 70° E. — Wash, 120 lks. wide, course N. 70° E.; ascend 85 ft. over SE. slope.

END CORNER (ch 80.00)

Corner, Secs. 3, 4, 9 & 10

GCDB code: 400600

12 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

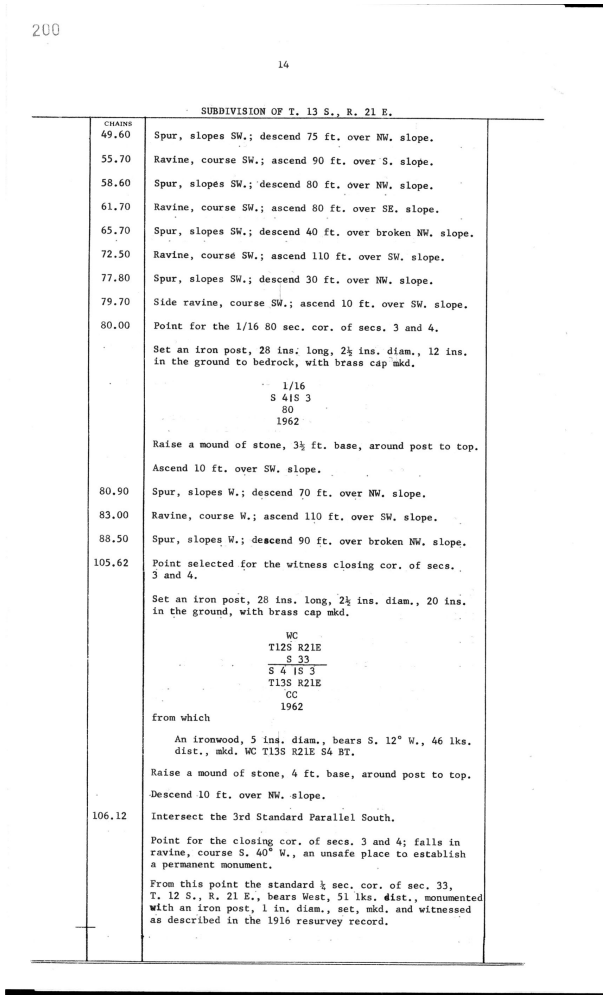

200

14

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
49.60	Spur, slopes SW.; descend 75 ft. over NW. slope.
55.70	Ravine, course SW.; ascend 90 ft. over S. slope.
58.60	Spur, slopes SW.; descend 80 ft. over NW. slope.
61.70	Ravine, course SW.; ascend 80 ft. over SE. slope.
65.70	Spur, slopes SW.; descend 40 ft. over broken NW. slope.
72.50	Ravine, course SW.; ascend 110 ft. over SW. slope.
77.80	Spur, slopes SW.; descend 30 ft. over NW. slope.
79.70	Side ravine, course SW.; ascend 10 ft. over SW. slope.
80.00	Point for the 1/16 80 sec. cor. of secs. 3 and 4. Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. 1/16 S 4IS 3 80 1962 Raise a mound of stone, 3½ ft. base, around post to top. Ascend 10 ft. over SW. slope.
80.90	Spur, slopes W.; descend 70 ft. over NW. slope.
83.00	Ravine, course W.; ascend 110 ft. over SW. slope.
88.50	Spur, slopes W.; descend 90 ft. over broken NW. slope.
105.62	Point selected for the witness closing cor. of secs. 3 and 4. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. WC T12S R21E S 33 S 4 IS 3 T13S R21E CC 1962 from which An ironwood, 5 ins. diam., bears S. 12° W., 46 lks. dist., mkd. WC T13S R21E S4 BT. Raise a mound of stone, 4 ft. base, around post to top. Descend 10 ft. over NW. slope.
106.12	Intersect the 3rd Standard Parallel South. Point for the closing cor. of secs. 3 and 4; falls in ravine, course S. 40° W., an unsafe place to establish a permanent monument. From this point the standard ¼ sec. cor. of sec. 33, T. 12 S., R. 21 E., bears West, 51 lks. dist., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the 1916 resurvey record.

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 14 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2	49.60	●	Spur, slopes SW.; descend 75 ft. over NW. slope.				
3	55.70	▼	Ravine, course SW.; ascend 90 ft. over S. slope.				
4	58.60	●	Spur, slopes SW.; descend 80 ft. over NW. slope.				
5	61.70	▼	Ravine, course SW.; ascend 80 ft. over SE. slope.				
6	65.70	●	Spur, slopes SW.; descend 40 ft. over broken NW. slope.				
7	72.50	▼	Ravine, course SW.; ascend 110 ft. over SW. slope.				
8	77.80	●	Spur, slopes SW.; descend 30 ft. over NW. slope.				
9	79.70	▼	Side ravine, course SW.; ascend 10 ft. over SW. slope.				
10	80.00	○	**Cor. Secs. 3-4 · Point for the 1/16 80 sec. cor. of secs. 3 and 4. Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. 1/16 S 4IS 3 80 1962 Raise a mound of stone, 3½ ft. base, around post to top. Ascend 10 ft. over SW. slope.**				400700
11	80.90	●	Spur, slopes W.; descend 70 ft. over NW. slope.				
12	83.00	▼	Ravine, course W.; ascend 110 ft. over SW. slope.				
13	88.50	●	Spur, slopes W.; descend 90 ft. over broken NW. slope.				
14	105.62	▲	**Cor. Secs. 3-4 · Point selected for the witness closing cor. of secs. 3 and 4. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. WC T12S R21E S 33 S 4 IS 3 T13S R21E CC 1962 from which An ironwood, 5 ins. diam., bears S. 12° W., 46 lks. dist., mkd. WC T13S R21E S4 BT. Raise a mound of stone, 4 ft. base, around post to top. Descend 10 ft. over NW. slope.**				400700
15	106.12	▲	**Cor. Secs. 3-4-33-34 · Intersect the 3rd Standard Parallel South. Point for the closing cor. of secs. 3 and 4; falls in ravine, course S. 40° W., an unsafe place to establish a permanent monument. From this point the standard ¼ sec. cor. of sec. 33, T. 12 S., R. 21 E., bears West, 51 lks. dist., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the 1916 resurvey record.**				400100

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

1/16 corner, Secs. 3 & 4

GCDB code: 400700

NOTABLE CALLS ALONG RUN

ch 105.62 Corner, Secs. 3 & 4

END CORNER (ch 106.12)

Corner, Secs. 3, 4, 33 & 34

GCDB code: 400100

14 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

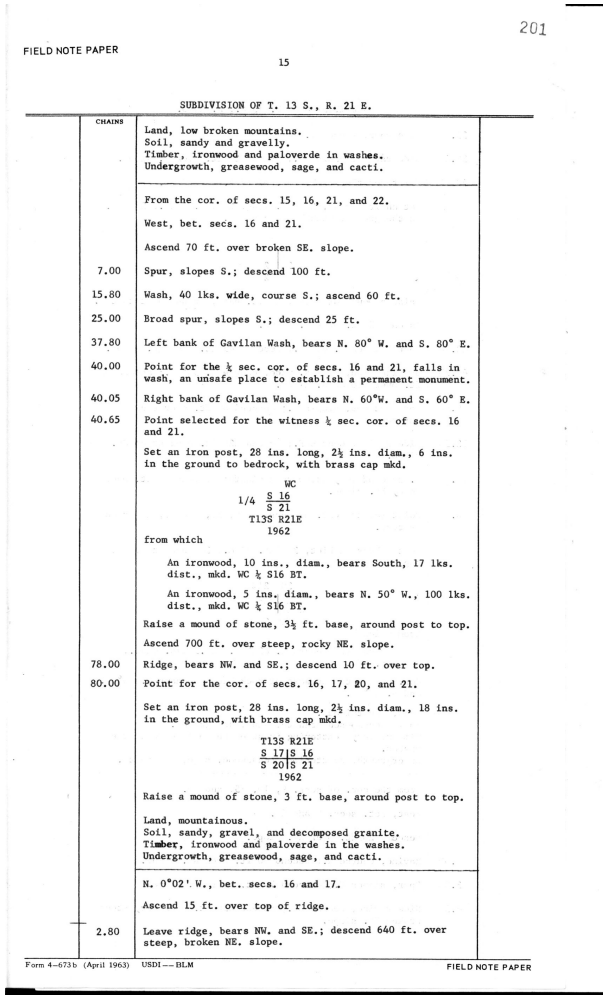

201

FIELD NOTE PAPER

15

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
	Land, low broken mountains. Soil, sandy and gravelly. Timber, ironwood and paloverde in washes. Undergrowth, greasewood, sage, and cacti.
	From the cor. of secs. 15, 16, 21, and 22.
	West, bet. secs. 16 and 21.
	Ascend 70 ft. over broken SE. slope.
7.00	Spur, slopes S.; descend 100 ft.
15.80	Wash, 40 lks. wide, course S.; ascend 60 ft.
25.00	Broad spur, slopes S.; descend 25 ft.
37.80	Left bank of Gavilan Wash, bears N. 80° W. and S. 80° E.
40.00	Point for the ¼ sec. cor. of secs. 16 and 21, falls in wash, an unsafe place to establish a permanent monument.
40.05	Right bank of Gavilan Wash, bears N. 60°W. and S. 60° E.
40.65	Point selected for the witness ¼ sec. cor. of secs. 16 and 21. Set an iron post, 28 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, with brass cap mkd. WC 1/4 S 16 S 21 T13S R21E 1962 from which An ironwood, 10 ins., diam., bears South, 17 lks. dist., mkd. WC ¼ S16 BT. An ironwood, 5 ins. diam., bears N. 50° W., 100 lks. dist., mkd. WC ¼ S16 BT. Raise a mound of stone, 3½ ft. base, around post to top. Ascend 700 ft. over steep, rocky NE. slope.
78.00	Ridge, bears NW. and SE.; descend 10 ft. over top.
80.00	Point for the cor. of secs. 16, 17, 20, and 21. Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd. T13S R21E S 17|S 16 S 20|S 21 1962 Raise a mound of stone, 3 ft. base, around post to top. Land, mountainous. Soil, sandy, gravel, and decomposed granite. Timber, ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti. N. 0°02' W., bet. secs. 16 and 17. Ascend 15 ft. over top of ridge.
2.80	Leave ridge, bears NW. and SE.; descend 640 ft. over steep, broken NE. slope.

Form 4–673b (April 1963) USDI — BLM FIELD NOTE PAPER

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 12 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2			Land, low broken mountains. Soil, sandy and gravelly. Timber, ironwood and paloverde in washes. Undergrowth, greasewood, sage, and cacti.				
3		▲	**Cor. Secs. 15-16-21-22 · From the cor. of secs. 15, 16, 21, and 22.**				400400
4			West, bet. secs. 16 and 21.				
5		●	Ascend 70 ft. over broken SE. slope.				
6	7.00	●	Spur, slopes S.; descend 100 ft.				
7	15.80	●	Wash, 40 lks. wide, course S. · Wash, 40 lks. wide, course S.; ascend 60 ft.				
8	25.00	●	Broad spur, slopes S.; descend 25 ft.				
9	37.80	●	Left bank of Gavilan Wash · Left bank of Gavilan Wash, bears N. 80° W. and S. 80° E.				
10	40.00	△	**¼ Cor. Sec. 16 N · Point for the ¼ sec. cor. of secs. 16 and 21, falls in wash, an unsafe place to establish a permanent monument.**				340500
11	40.05	●	Right bank of Gavilan Wash · Right bank of Gavilan Wash, bears N. 60°W. and S. 60° E.				
12	40.65	△	**¼ Cor. Sec. 16 N · Point selected for the witness ¼ sec. cor. of secs. 16 and 21. Set an iron post, 28 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, with brass cap mkd. WC 1/4 S 16 S 21 T13S R21E 1962 from which An ironwood, 10 ins., diam., bears South, 17 lks. dist., mkd. WC ¼ S16 BT. An ironwood, 5 ins. diam., bears N. 50° W., 100 lks. dist., mkd. WC ¼ S16 BT. Raise a mound of stone, 3½ ft. base, around post to top. Ascend 700 ft. over steep, rocky NE. slope.**				340500
13	78.00	●	Ridge, bears NW. and SE.; descend 10 ft. over top.				
14	80.00	▲	**Cor. Secs. 16-17-20-21 · Point for the cor. of secs. 16, 17, 20, and 21. Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd. T13S R21E S 17|S 16 S 20|S 21 1962 Raise a mound of stone, 3 ft. base, around post to top. Land, mountainous. Soil, sandy, gravel, and decomposed granite. Timber, ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti. N. 0°02' W., bet. secs. 16 and 17. Ascend 15 ft. over top of ridge.**				300400
15	2.80	●	Leave ridge, bears NW. and SE.; descend 640 ft. over steep, broken NE. slope.				

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Sections 16 & 21 · West

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 16

GCDB code: 340500

NOTABLE CALLS ALONG RUN

ch 15.80 Wash, 40 lks. wide, course S. — Wash, 40 lks. wide, course S.; ascend 60 ft.
ch 37.80 Left bank of Gavilan Wash — Left bank of Gavilan Wash, bears N. 80° W. and S. 80° E.
ch 40.05 Right bank of Gavilan Wash — Right bank of Gavilan Wash, bears N. 60°W. and S. 60° E.
ch 40.65 ¼ corner, Sec. 16

END CORNER (ch 80.00)

Corner, Secs. 16, 17, 20 & 21

GCDB code: 300400

10 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE · Sections: 16 · 21 · West

Run Geolocate on this document to generate the elevation profile.

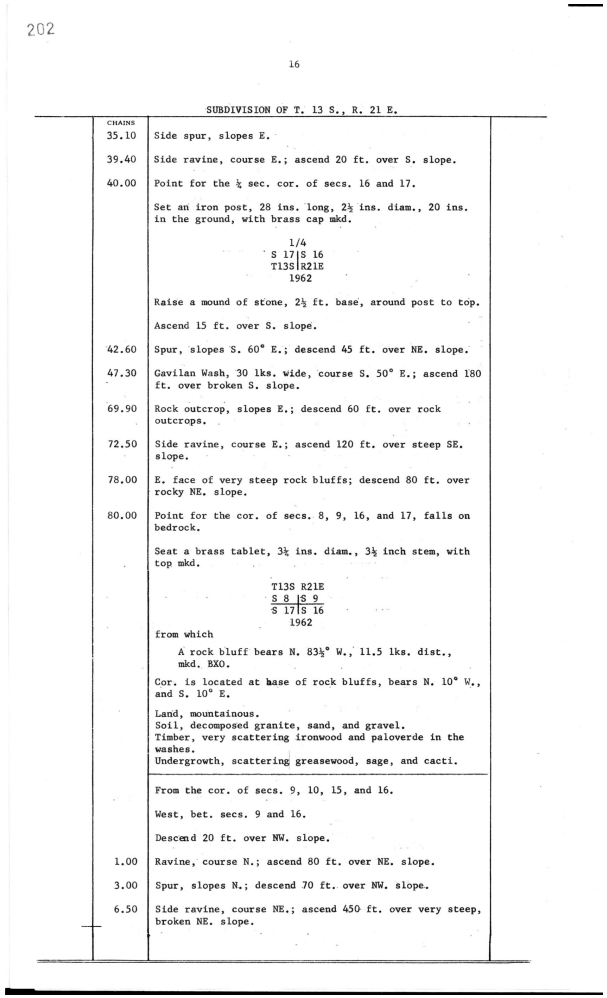

202

16

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
35.10	Side spur, slopes E.
39.40	Side ravine, course E.; ascend 20 ft. over S. slope.
40.00	Point for the ¼ sec. cor. of secs. 16 and 17. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. 1/4 S 17 | S 16 T13S | R21E 1962 Raise a mound of stone, 2½ ft. base, around post to top. Ascend 15 ft. over S. slope.
42.60	Spur, slopes S. 60° E.; descend 45 ft. over NE. slope.
47.30	Gavilan Wash, 30 lks. wide, course S. 50° E.; ascend 180 ft. over broken S. slope.
69.90	Rock outcrop, slopes E.; descend 60 ft. over rock outcrops.
72.50	Side ravine, course E.; ascend 120 ft. over steep SE. slope.
78.00	E. face of very steep rock bluffs; descend 80 ft. over rocky NE. slope.
80.00	Point for the cor. of secs. 8, 9, 16, and 17, falls on bedrock. Seat a brass tablet, 3½ ins. diam., 3½ inch stem, with top mkd. T13S R21E S 8 | S 9 S 17 | S 16 1962 from which A rock bluff bears N. 83½° W., 11.5 lks. dist., mkd. BXO. Cor. is located at base of rock bluffs, bears N. 10° W., and S. 10° E. Land, mountainous. Soil, decomposed granite, sand, and gravel. Timber, very scattering ironwood and paloverde in the washes. Undergrowth, scattering greasewood, sage, and cacti.
	From the cor. of secs. 9, 10, 15, and 16. West, bet. secs. 9 and 16. Descend 20 ft. over NW. slope.
1.00	Ravine, course N.; ascend 80 ft. over NE. slope.
3.00	Spur, slopes N.; descend 70 ft. over NW. slope.
6.50	Side ravine, course NE.; ascend 450 ft. over very steep, broken NE. slope.

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 12 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2	35.10	●	Side spur, slopes E.				
3	39.40	▼	Side ravine, course E.; ascend 20 ft. over S. slope.				
4	40.00	△	**¼ Cor. Sec. 16 N · Point for the ¼ sec. cor. of secs. 16 and 17. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. 1/4 S 17|S 16 T13S|R21E 1962 Raise a mound of stone, 2½ ft. base, around post to top. Ascend 15 ft. over S. slope.**				340500
5	42.60	●	Spur, slopes S. 60° E.; descend 45 ft. over NE. slope.				
6	47.30	●	Gavilan Wash, 30 lks. wide, course S. 50° E. · Gavilan Wash, 30 lks. wide, course S. 50° E.; ascend 180 ft. over broken S. slope.				
7	69.90	●	Rock outcrop, slopes E.; descend 60 ft. over rock outcrops.				
8	72.50	▼	Side ravine, course E.; ascend 120 ft. over steep SE. slope.				
9	78.00	●	E. face of very steep rock bluffs; descend 80 ft. over rocky NE. slope.				
10	80.00	△	**Cor. Secs. 8-9-16-17 · Point for the cor. of secs. 8, 9, 16, and 17, falls on bedrock. Seat a brass tablet, 3½ ins. diam., 3½ inch stem, with top mkd. T13S R21E S 8 |S 9 S 17|S 16 1962 from which A rock bluff bears N. 83½° W., 11.5 lks. dist., mkd. BXO. Cor. is located at base of rock bluffs, bears N. 10° W., and S. 10° E. Land, mountainous. Soil, decomposed granite, sand, and gravel. Timber, very scattering ironwood and paloverde in the washes. Undergrowth, scattering greasewood, sage, and cacti. From the cor. of secs. 9, 10, 15, and 16. West, bet. secs. 9 and 16. Descend 20 ft. over NW. slope.**				300500
11	1.00	▼	Ravine, course N.; ascend 80 ft. over NE. slope.				
12	3.00	●	Spur, slopes N.; descend 70 ft. over NW. slope.				
13	6.50	▼	Side ravine, course NE.; ascend 450 ft. over very steep, broken NE. slope.				

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 16

GCDB code: 340500

NOTABLE CALLS ALONG RUN

ch 47.30 Gavilan Wash, 30 lks. wide, course S. 50° E. — Gavilan Wash, 30 lks. wide, course S. 50° E.; ascend 180 ft. over broken S. slope.

END CORNER (ch 80.00)

Corner, Secs. 8, 9, 16 & 17

GCDB code: 300500

12 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

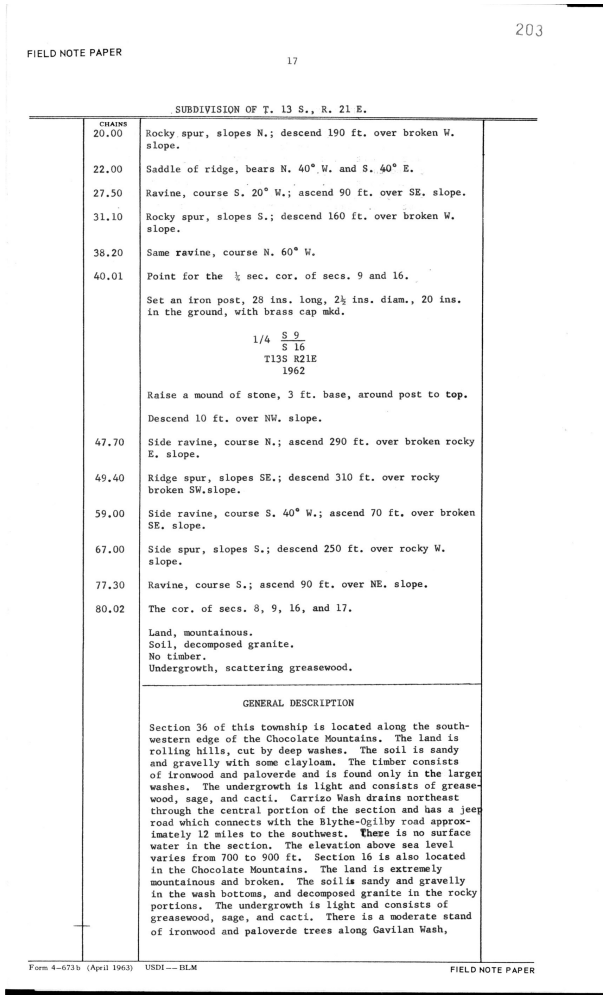

203

FIELD NOTE PAPER

17

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
20.00	Rocky spur, slopes N.; descend 190 ft. over broken W. slope.
22.00	Saddle of ridge, bears N. 40° W. and S. 40° E.
27.50	Ravine, course S. 20° W.; ascend 90 ft. over SE. slope.
31.10	Rocky spur, slopes S.; descend 160 ft. over broken W. slope.
38.20	Same ravine, course N. 60° W.
40.01	Point for the ¼ sec. cor. of secs. 9 and 16.
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. 1/4 S 9 / S 16 T13S R21E 1962
	Raise a mound of stone, 3 ft. base, around post to top.
	Descend 10 ft. over NW. slope.
47.70	Side ravine, course N.; ascend 290 ft. over broken rocky E. slope.
49.40	Ridge spur, slopes SE.; descend 310 ft. over rocky broken SW. slope.
59.00	Side ravine, course S. 40° W.; ascend 70 ft. over broken SE. slope.
67.00	Side spur, slopes S.; descend 250 ft. over rocky W. slope.
77.30	Ravine, course S.; ascend 90 ft. over NE. slope.
80.02	The cor. of secs. 8, 9, 16, and 17.
	Land, mountainous. Soil, decomposed granite. No timber. Undergrowth, scattering greasewood.

GENERAL DESCRIPTION

Section 36 of this township is located along the southwestern edge of the Chocolate Mountains. The land is rolling hills, cut by deep washes. The soil is sandy and gravelly with some clayloam. The timber consists of ironwood and paloverde and is found only in the larger washes. The undergrowth is light and consists of greasewood, sage, and cacti. Carrizo Wash drains northeast through the central portion of the section and has a jeep road which connects with the Blythe-Ogilby road approximately 12 miles to the southwest. There is no surface water in the section. The elevation above sea level varies from 700 to 900 ft. Section 16 is also located in the Chocolate Mountains. The land is extremely mountainous and broken. The soil is sandy and gravelly in the wash bottoms, and decomposed granite in the rocky portions. The undergrowth is light and consists of greasewood, sage, and cacti. There is a moderate stand of ironwood and paloverde trees along Gavilan Wash,

Form 4–673b (April 1963) USDI — BLM FIELD NOTE PAPER

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 12 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2	20.00	●	Rocky spur, slopes N.; descend 190 ft. over broken W. slope.				
3	22.00	●	Saddle of ridge, bears N. 40° W. and S. 40° E.				
4	27.50	▼	Ravine, course S. 20° W.; ascend 90 ft. over SE. slope.				
5	31.10	●	Rocky spur, slopes S.; descend 160 ft. over broken W. slope.				
6	38.20	▼	Same ravine, course N. 60° W.				
7	40.01	△	**¼ Cor. Sec. 9 N · Point for the ¼ sec. cor. of secs. 9 and 16. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. 1/4 S 9 S 16 T13S R21E 1962 Raise a mound of stone, 3 ft. base, around post to top. Descend 10 ft. over NW. slope.**				340600
8	47.70	▼	Side ravine, course N.; ascend 290 ft. over broken rocky E. slope.				
9	49.40	●	Ridge spur, slopes SE.; descend 310 ft. over rocky broken SW. slope.				
10	59.00	▼	Side ravine, course S. 40° W.; ascend 70 ft. over broken SE. slope.				
11	67.00	●	Side spur, slopes S.; descend 250 ft. over rocky W. slope.				
12	77.30	▼	Ravine, course S.; ascend 90 ft. over NE. slope.				
13	80.02	▲	**Cor. Secs. 8-9-16-17 · The cor. of secs. 8, 9, 16, and 17. Land, mountainous. Soil, decomposed granite. No timber. Undergrowth, scattering greasewood. GENERAL DESCRIPTION Section 36 of this township is located along the southwestern edge of the Chocolate Mountains. The land is rolling hills, cut by deep washes. The soil is sandy and gravelly with some clayloam. The timber consists of ironwood and paloverde and is found only in the larger washes. The undergrowth is light and consists of greasewood, sage, and cacti. Carrizo Wash drains northeast through the central portion of the section and has a jeep road which connects with the Blythe-Ogilby road approximately 12 miles to the southwest. There is no surface water in the section. The elevation above sea level varies from 700 to 900 ft. Section 16 is also located in the Chocolate Mountains. The land is extremely mountainous and broken. The soil is sandy and gravelly in the wash bottoms, and decomposed granite in the rocky portions. The undergrowth is light and consists of greasewood, sage, and cacti. There is a moderate stand of ironwood and paloverde trees along Gavilan Wash,**				300500

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 9

GCDB code: 340600

END CORNER (ch 80.02)

Corner, Secs. 8, 9, 16 & 17

GCDB code: 300500

12 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

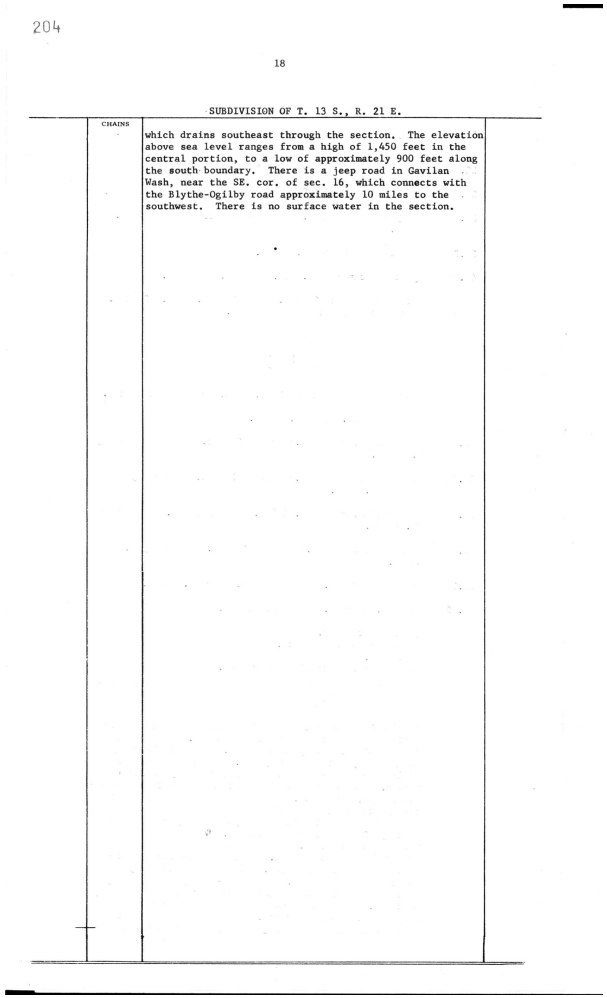

204

18

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS

which drains southeast through the section. The elevation above sea level ranges from a high of 1,450 feet in the central portion, to a low of approximately 900 feet along the south boundary. There is a jeep road in Gavilan Wash, near the SE. cor. of sec. 16, which connects with the Blythe-Ogilby road approximately 10 miles to the southwest. There is no surface water in the section.

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			204 18 SUBDIVISION OF T. 13 S., R. 21 E. CHAINS which drains southeast through the section. The elevation above sea level ranges from a high of 1,450 feet in the central portion, to a low of approximately 900 feet along the south boundary. There is a jeep road in Gavilan Wash, near the SE. cor. of sec. 16, which connects with the Blythe-Ogilby road approximately 10 miles to the southwest. There is no surface water in the section.				

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

0 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

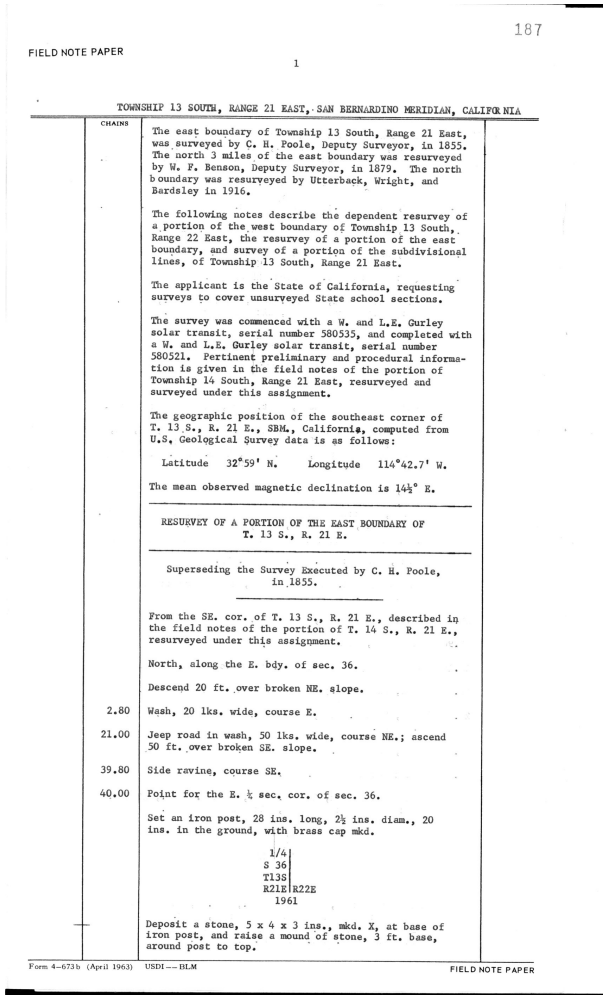

187

FIELD NOTE PAPER

1

TOWNSHIP 13 SOUTH, RANGE 21 EAST, SAN BERNARDINO MERIDIAN, CALIFORNIA

CHAINS

The east boundary of Township 13 South, Range 21 East, was surveyed by C. H. Poole, Deputy Surveyor, in 1855. The north 3 miles of the east boundary was resurveyed by W. F. Benson, Deputy Surveyor, in 1879. The north boundary was resurveyed by Utterback, Wright, and Bardsley in 1916.

The following notes describe the dependent resurvey of a portion of the west boundary of Township 13 South, Range 22 East, the resurvey of a portion of the east boundary, and survey of a portion of the subdivisional lines, of Township 13 South, Range 21 East.

The applicant is the State of California, requesting surveys to cover unsurveyed State school sections.

The survey was commenced with a W. and L.E. Gurley solar transit, serial number 580535, and completed with a W. and L.E. Gurley solar transit, serial number 580521. Pertinent preliminary and procedural information is given in the field notes of the portion of Township 14 South, Range 21 East, resurveyed and surveyed under this assignment.

The geographic position of the southeast corner of T. 13 S., R. 21 E., SBM., California, computed from U.S. Geological Survey data is as follows:

Latitude 32°59' N. Longitude 114°42.7' W.

The mean observed magnetic declination is 14½° E.

RESURVEY OF A PORTION OF THE EAST BOUNDARY OF T. 13 S., R. 21 E.

Superseding the Survey Executed by C. H. Poole, in 1855.

From the SE. cor. of T. 13 S., R. 21 E., described in the field notes of the portion of T. 14 S., R. 21 E., resurveyed under this assignment.

North, along the E. bdy. of sec. 36.

Descend 20 ft. over broken NE. slope.

2.80 Wash, 20 lks. wide, course E.

21.00 Jeep road in wash, 50 lks. wide, course NE.; ascend 50 ft. over broken SE. slope.

39.80 Side ravine, course SE.

40.00 Point for the E. ¼ sec. cor. of sec. 36.

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

1/4
S 36
T13S
R21E|R22E
1961

Deposit a stone, 5 x 4 x 3 ins., mkd. X, at base of iron post, and raise a mound of stone, 3 ft. base, around post to top.

Form 4–673b (April 1963) USDI — BLM FIELD NOTE PAPER

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 7 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			TOWNSHIP 13 SOUTH, RANGE 21 EAST, SAN BERNARDINO MERIDIAN, CALIFORNIA				
2			The east boundary of Township 13 South, Range 21 East, was surveyed by C. H. Poole, Deputy Surveyor, in 1855. The north 3 miles of the east boundary was resurveyed by W. F. Benson, Deputy Surveyor, in 1879. The north boundary was resurveyed by Utterback, Wright, and Bardsley in 1916.				
3			The following notes describe the dependent resurvey of a portion of the west boundary of Township 13 South, Range 22 East, the resurvey of a portion of the east boundary, and survey of a portion of the subdivisional lines, of Township 13 South, Range 21 East.				
4			The applicant is the State of California, requesting surveys to cover unsurveyed State school sections.				
5			The survey was commenced with a W. and L.E. Gurley solar transit, serial number 580535, and completed with a W. and L.E. Gurley solar transit, serial number 580521. Pertinent preliminary and procedural information is given in the field notes of the portion of Township 14 South, Range 21 East, resurveyed and surveyed under this assignment.				
6		▲	**The geographic position of the southeast corner of T. 13 S., R. 21 E., SBM., California, computed from U.S. Geological Survey data is as follows:**				
7			Latitude 32°59' N. Longitude 114°42.7' W.				
8			The mean observed magnetic declination is 14½° E.				
9			RESURVEY OF A PORTION OF THE EAST BOUNDARY OF T. 13 S., R. 21 E.				
10			Superseding the Survey Executed by C. H. Poole, in 1855.				
11		▲	**From the SE. cor. of T. 13 S., R. 21 E., described in the field notes of the portion of T. 14 S., R. 21 E., resurveyed under this assignment.**				
12			North, along the E. bdy. of sec. 36.				
13		●	Descend 20 ft. over broken NE. slope.				
14	2.80	●	Wash, 20 lks. wide, course E.				
15	21.00	■	Jeep road in wash, 50 lks. wide, course NE.; ascend 50 ft. over broken SE. slope.				
16	39.80	▼	Side ravine, course SE.				
17	40.00	△	**¼ Cor. Sec. 36 N · Point for the E. ¼ sec. cor. of sec. 36. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. 1/4 S 36 T13S R21E|R22E 1961 Deposit a stone, 5 x 4 x 3 ins., mkd. X, at base of iron post, and raise a mound of stone, 3 ft. base, around post to top.**				640200

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 36

GCDB code: 640200

NOTABLE CALLS ALONG RUN

ch 2.80 Wash, 20 lks. wide, course E. — Wash, 20 lks. wide, course E.

4 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

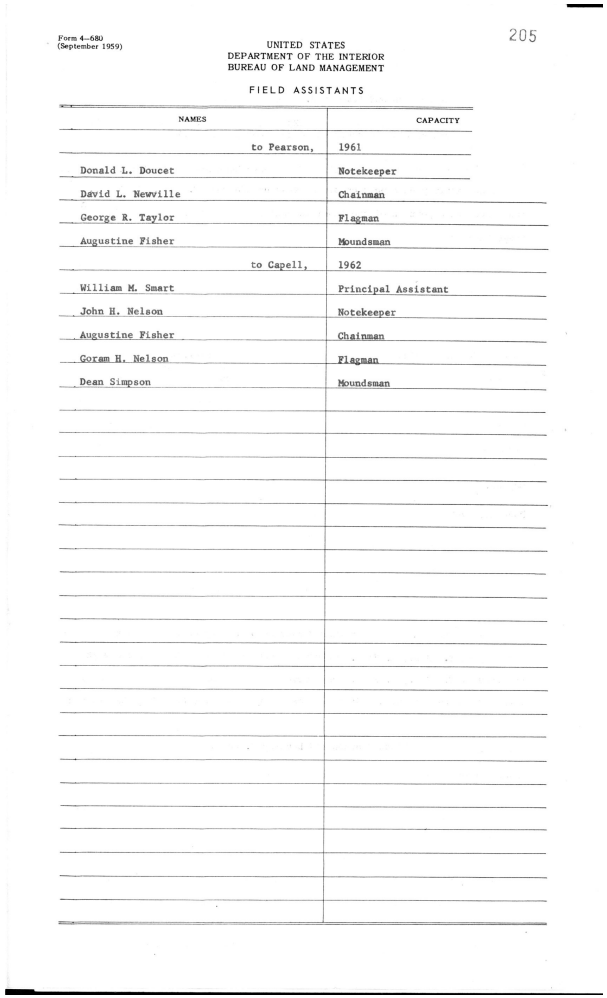

Form 4--680
(September 1959)

205

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
to Pearson,	1961
Donald L. Doucet	Notekeeper
David L. Newville	Chainman
George R. Taylor	Flagman
Augustine Fisher	Moundsman
to Capell,	1962
William M. Smart	Principal Assistant
John H. Nelson	Notekeeper
Augustine Fisher	Chainman
Goram H. Nelson	Flagman
Dean Simpson	Moundsman

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	Form 4-680 (September 1959) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT FIELD ASSISTANTS NAMES CAPACITY to Pearson, 1961 Donald L. Doucet Notekeeper David L. Newville Chainman George R. Taylor Flagman Augustine Fisher Moundsman to Capell, 1962 William M. Smart Principal Assistant John H. Nelson Notekeeper Augustine Fisher Chainman Goram H. Nelson Flagman Dean Simpson Moundsman 205				

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

0 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

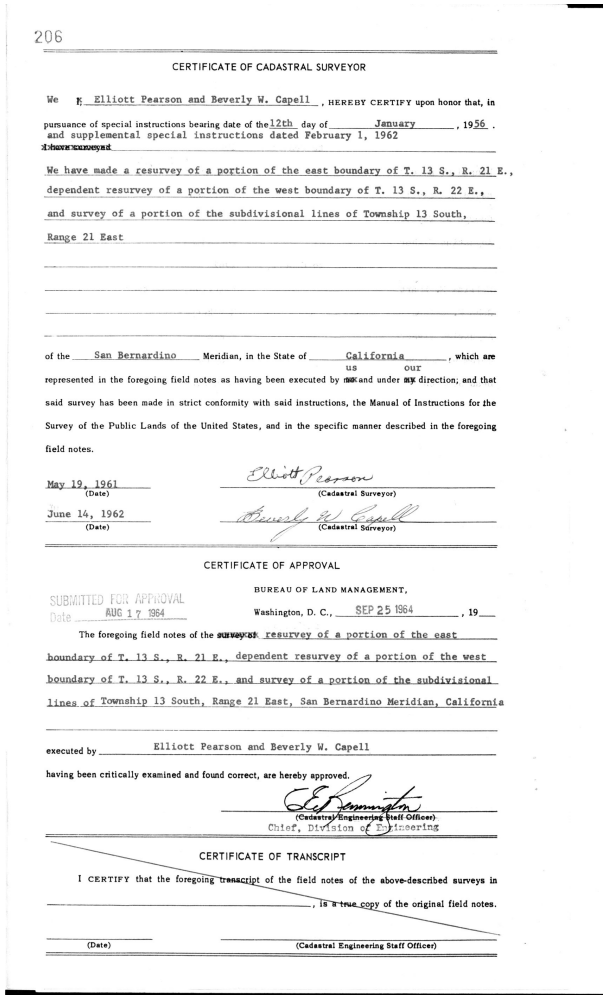

206

CERTIFICATE OF CADASTRAL SURVEYOR

We ~~I~~, Elliott Pearson and Beverly W. Capell , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 12th day of January , 1956 . and supplemental special instructions dated February 1, 1962 ~~I have surveyed~~

We have made a resurvey of a portion of the east boundary of T. 13 S., R. 21 E., dependent resurvey of a portion of the west boundary of T. 13 S., R. 22 E., and survey of a portion of the subdivisional lines of Township 13 South, Range 21 East

of the San Bernardino Meridian, in the State of California , which are ~~I~~ us our represented in the foregoing field notes as having been executed by ~~me~~ us and under ~~my~~ our direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

May 19, 1961 (Date) Elliott Pearson (Cadastral Surveyor)

June 14, 1962 (Date) Beverly W. Capell (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date AUG 17 1964

BUREAU OF LAND MANAGEMENT,

Washington, D. C., SEP 25 1964 , 19__

The foregoing field notes of the ~~survey of~~ resurvey of a portion of the east boundary of T. 13 S., R. 21 E., dependent resurvey of a portion of the west boundary of T. 13 S., R. 22 E., and survey of a portion of the subdivisional lines of Township 13 South, Range 21 East, San Bernardino Meridian, California

executed by Elliott Pearson and Beverly W. Capell

having been critically examined and found correct, are hereby approved.

[signature] (Cadastral Engineering Staff Officer)

Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date) (Cadastral Engineering Staff Officer)

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			206 CERTIFICATE OF CADASTRAL SURVEYOR We K. Elliott Pearson and Beverly W. Capell , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 12th day of January , 1956 . and supplemental special instructions dated February 1, 1962 1 have surveyed We have made a resurvey of a portion of the east boundary of T. 13 S., R. 21 E., dependent resurvey of a portion of the west boundary of T. 13 S., R. 22 E., and survey of a portion of the subdivisional lines of Township 13 South, Range 21 East of the San Bernardino Meridian, in the State of California , which are us our represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes. May 19, 1961 (Date) Elliott Pearson (Cadastral Surveyor) June 14, 1962 (Date) Beverly W. Capell (Cadastral Surveyor) CERTIFICATE OF APPROVAL SUBMITTED FOR APPROVAL BUREAU OF LAND MANAGEMENT, Date AUG 1 7 1964 Washington, D. C., SEP 25 1964 , 19__ The foregoing field notes of the survey of: resurvey of a portion of the east boundary of T. 13 S., R. 21 E., dependent resurvey of a portion of the west boundary of T. 13 S., R. 22 E., and survey of a portion of the subdivisional lines of Township 13 South, Range 21 East, San Bernardino Meridian, California executed by Elliott Pearson and Beverly W. Capell having been critically examined and found correct, are hereby approved. [signature] (Cadastral Engineering Staff Officer) Chief, Division of Engineering CERTIFICATE OF TRANSCRIPT I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes. (Date) (Cadastral Engineering Staff Officer)				

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

0 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

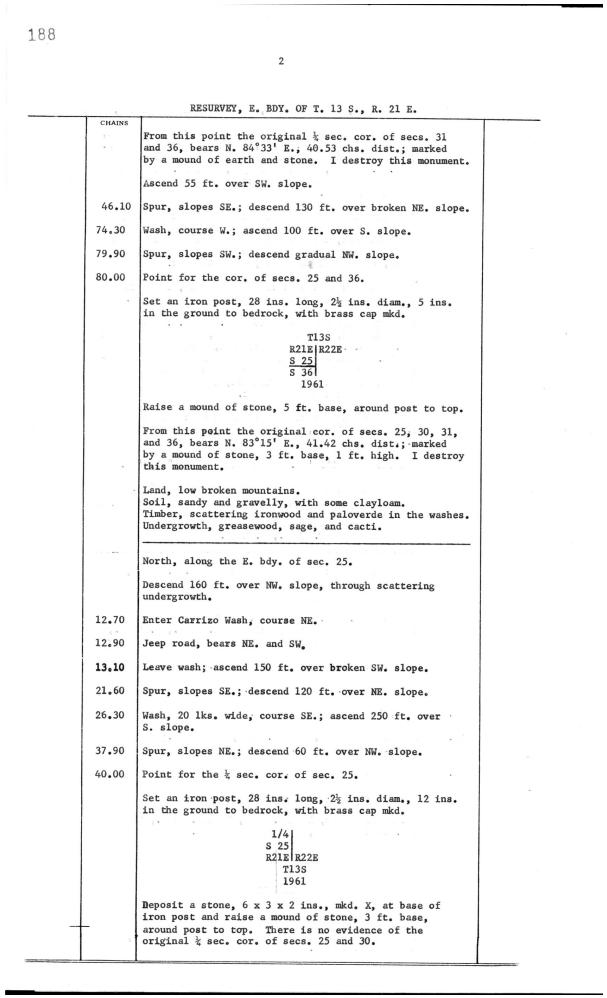

188

2

RESURVEY, E. BDY. OF T. 13 S., R. 21 E.

CHAINS	
	From this point the original ¼ sec. cor. of secs. 31 and 36, bears N. 84°33' E., 40.53 chs. dist.; marked by a mound of earth and stone. I destroy this monument.
	Ascend 55 ft. over SW. slope.
46.10	Spur, slopes SE.; descend 130 ft. over broken NE. slope.
74.30	Wash, course W.; ascend 100 ft. over S. slope.
79.90	Spur, slopes SW.; descend gradual NW. slope.
80.00	Point for the cor. of secs. 25 and 36.
	Set an iron post, 28 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, with brass cap mkd. T13S | R21E | R22E | S 25 | S 36 | 1961
	Raise a mound of stone, 5 ft. base, around post to top.
	From this point the original cor. of secs. 25, 30, 31, and 36, bears N. 83°15' E., 41.42 chs. dist.; marked by a mound of stone, 3 ft. base, 1 ft. high. I destroy this monument.
	Land, low broken mountains. Soil, sandy and gravelly, with some clayloam. Timber, scattering ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti.
	North, along the E. bdy. of sec. 25.
	Descend 160 ft. over NW. slope, through scattering undergrowth.
12.70	Enter Carrizo Wash, course NE.
12.90	Jeep road, bears NE. and SW.
13.10	Leave wash; ascend 150 ft. over broken SW. slope.
21.60	Spur, slopes SE.; descend 120 ft. over NE. slope.
26.30	Wash, 20 lks. wide, course SE.; ascend 250 ft. over S. slope.
37.90	Spur, slopes NE.; descend 60 ft. over NW. slope.
40.00	Point for the ¼ sec. cor. of sec. 25.
	Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. 1/4 | S 25 | R21E | R22E | T13S | 1961
	Deposit a stone, 6 x 3 x 2 ins., mkd. X, at base of iron post and raise a mound of stone, 3 ft. base, around post to top. There is no evidence of the original ¼ sec. cor. of secs. 25 and 30.

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 13 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			RESURVEY, E. BDY. OF T. 13 S., R. 21 E.				
2		▲	**Cor. Secs. 1-6-31-36 · From this point the original ¼ sec. cor. of secs. 31 and 36, bears N. 84°33' E., 40.53 chs. dist.; marked by a mound of earth and stone. I destroy this monument.**				100100
3		●	Ascend 55 ft. over SW. slope.				
4	46.10	●	Spur, slopes SE.; descend 130 ft. over broken NE. slope.				
5	74.30	●	Wash · Wash, course W.; ascend 100 ft. over S. slope.				
6	79.90	●	Spur, slopes SW.; descend gradual NW. slope.				
7	80.00	▲	**Cor. Secs. 25-30-31-36 · Point for the cor. of secs. 25 and 36. Set an iron post, 28 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, with brass cap mkd. T13S R21E|R22E S 25| S 36| 1961 Raise a mound of stone, 5 ft. base, around post to top. From this point the original cor. of secs. 25, 30, 31, and 36, bears N. 83°15' E., 41.42 chs. dist.; marked by a mound of stone, 3 ft. base, 1 ft. high. I destroy this monument. Land, low broken mountains. Soil, sandy and gravelly, with some clayloam. Timber, scattering ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti. North, along the E. bdy. of sec. 25. Descend 160 ft. over NW. slope, through scattering undergrowth.**				100200
8	12.70	●	Carrizo Wash · Enter Carrizo Wash, course NE.				
9	12.90	■	Jeep road, bears NE. and SW.				
10	13.10	●	wash · Leave wash; ascend 150 ft. over broken SW. slope.				
11	21.60	●	Spur, slopes SE.; descend 120 ft. over NE. slope.				
12	26.30	●	Wash · Wash, 20 lks. wide, course SE.; ascend 250 ft. over S. slope.				
13	37.90	●	Spur, slopes NE.; descend 60 ft. over NW. slope.				
14	40.00	△	**¼ Cor. Sec. 25 N · Point for the ¼ sec. cor. of sec. 25. Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, with brass cap mkd. 1/4| S 25| R21E|R22E T13S 1961 Deposit a stone, 6 x 3 x 2 ins., mkd. X, at base of iron post and raise a mound of stone, 3 ft. base, around post to top. There is no evidence of the original ¼ sec. cor. of secs. 25 and 30.**				640300

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 25

GCDB code: 640300

NOTABLE CALLS ALONG RUN

ch 12.70 Carrizo Wash — Enter Carrizo Wash, course NE.
ch 13.10 wash — Leave wash; ascend 150 ft. over broken SW. slope.
ch 26.30 Wash — Wash, 20 lks. wide, course SE.; ascend 250 ft. over S. slope.
ch 74.30 Wash — Wash, course W.; ascend 100 ft. over S. slope.

END CORNER (ch 80.00)

Corner, Secs. 25, 30, 31 & 36

GCDB code: 100200

11 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

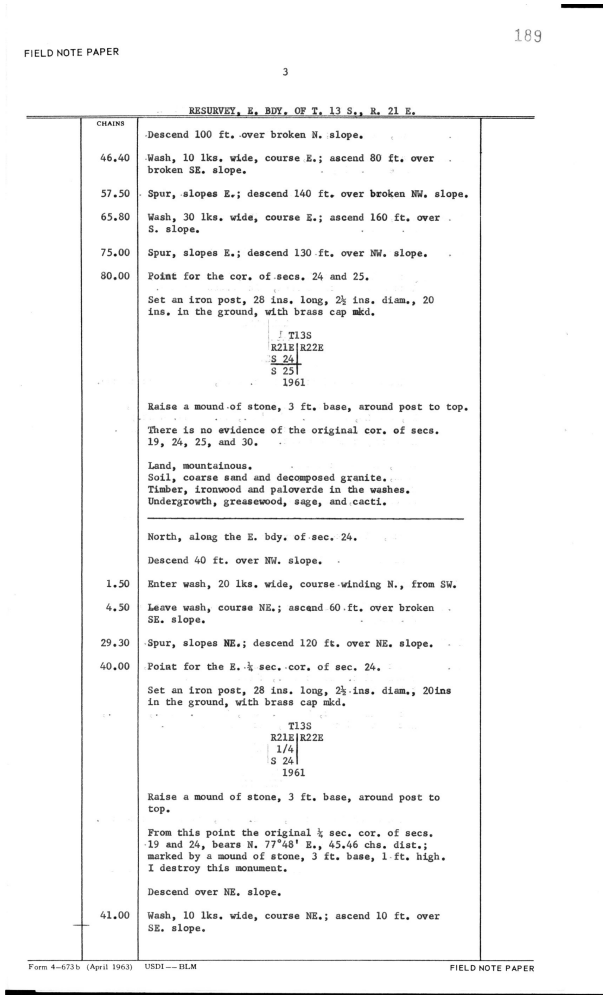

189

FIELD NOTE PAPER

3

RESURVEY, E. BDY. OF T. 13 S., R. 21 E.

CHAINS	
	Descend 100 ft. over broken N. slope.
46.40	Wash, 10 lks. wide, course E.; ascend 80 ft. over broken SE. slope.
57.50	Spur, slopes E.; descend 140 ft. over broken NW. slope.
65.80	Wash, 30 lks. wide, course E.; ascend 160 ft. over S. slope.
75.00	Spur, slopes E.; descend 130 ft. over NW. slope.
80.00	Point for the cor. of secs. 24 and 25.
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. ! T13S R21E|R22E S 24 S 25 1961
	Raise a mound of stone, 3 ft. base, around post to top.
	There is no evidence of the original cor. of secs. 19, 24, 25, and 30.
	Land, mountainous. Soil, coarse sand and decomposed granite. Timber, ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti.
	North, along the E. bdy. of sec. 24.
	Descend 40 ft. over NW. slope.
1.50	Enter wash, 20 lks. wide, course winding N., from SW.
4.50	Leave wash, course NE.; ascend 60 ft. over broken SE. slope.
29.30	Spur, slopes NE.; descend 120 ft. over NE. slope.
40.00	Point for the E. ¼ sec. cor. of sec. 24.
	Set an iron post, 28 ins. long, 2½ ins. diam., 20ins in the ground, with brass cap mkd. T13S R21E|R22E 1/4 S 24 1961
	Raise a mound of stone, 3 ft. base, around post to top.
	From this point the original ¼ sec. cor. of secs. 19 and 24, bears N. 77°48' E., 45.46 chs. dist.; marked by a mound of stone, 3 ft. base, 1 ft. high. I destroy this monument.
	Descend over NE. slope.
41.00	Wash, 10 lks. wide, course NE.; ascend 10 ft. over SE. slope.

Form 4–673b (April 1963) USDI — BLM FIELD NOTE PAPER

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 11 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			RESURVEY, E. BDY. OF T. 13 S., R. 21 E.				
2		●	Descend 100 ft. over broken N. slope.				
3	46.40	●	Wash, 10 lks. wide, course E. · Wash, 10 lks. wide, course E.; ascend 80 ft. over broken SE. slope.				
4	57.50	●	Spur, slopes E.; descend 140 ft. over broken NW. slope.				
5	65.80	●	Wash, 30 lks. wide, course E. · Wash, 30 lks. wide, course E.; ascend 160 ft. over S. slope.				
6	75.00	●	Spur, slopes E.; descend 130 ft. over NW. slope.				
7	80.00	▲	**Cor. Secs. 19-24-25-30 · Point for the cor. of secs. 24 and 25. Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. ! T13S R21E|R22E S 24 S 25 1961 Raise a mound of stone, 3 ft. base, around post to top. There is no evidence of the original cor. of secs. 19, 24, 25, and 30. Land, mountainous. Soil, coarse sand and decomposed granite. Timber, ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti. North, along the E. bdy. of sec. 24. Descend 40 ft. over NW. slope.**				100300
8	1.50	●	Enter wash, 20 lks. wide, course winding N., from SW.				
9	4.50	●	Leave wash, course NE. · Leave wash, course NE.; ascend 60 ft. over broken SE. slope.				
10	29.30	●	Spur, slopes NE.; descend 120 ft. over NE. slope.				
11	40.00	△	**¼ Cor. Sec. 19 N · Point for the E. ¼ sec. cor. of sec. 24. Set an iron post, 28 ins. long, 2½ ins. diam., 20ins in the ground, with brass cap mkd. T13S R21E|R22E 1/4 S 24 1961 Raise a mound of stone, 3 ft. base, around post to top. From this point the original ¼ sec. cor. of secs. 19 and 24, bears N. 77°48' E., 45.46 chs. dist.; marked by a mound of stone, 3 ft. base, 1 ft. high. I destroy this monument. Descend over NE. slope.**				140400
12	41.00	●	Wash, 10 lks. wide, course NE. · Wash, 10 lks. wide, course NE.; ascend 10 ft. over SE. slope.				

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 19

GCDB code: 140400

NOTABLE CALLS ALONG RUN

ch 1.50 Enter wash, 20 lks. wide, course winding N., from SW. — Enter wash, 20 lks. wide, course winding N., from SW.

ch 4.50 Leave wash, course NE. — Leave wash, course NE.; ascend 60 ft. over broken SE. slope.

ch 41.00 Wash, 10 lks. wide, course NE. — Wash, 10 lks. wide, course NE.; ascend 10 ft. over SE. slope.

ch 46.40 Wash, 10 lks. wide, course E. — Wash, 10 lks. wide, course E.; ascend 80 ft. over broken SE. slope.

ch 65.80 Wash, 30 lks. wide, course E. — Wash, 30 lks. wide, course E.; ascend 160 ft. over S. slope.

END CORNER (ch 80.00)

Corner, Secs. 19, 24, 25 & 30

GCDB code: 100300

10 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

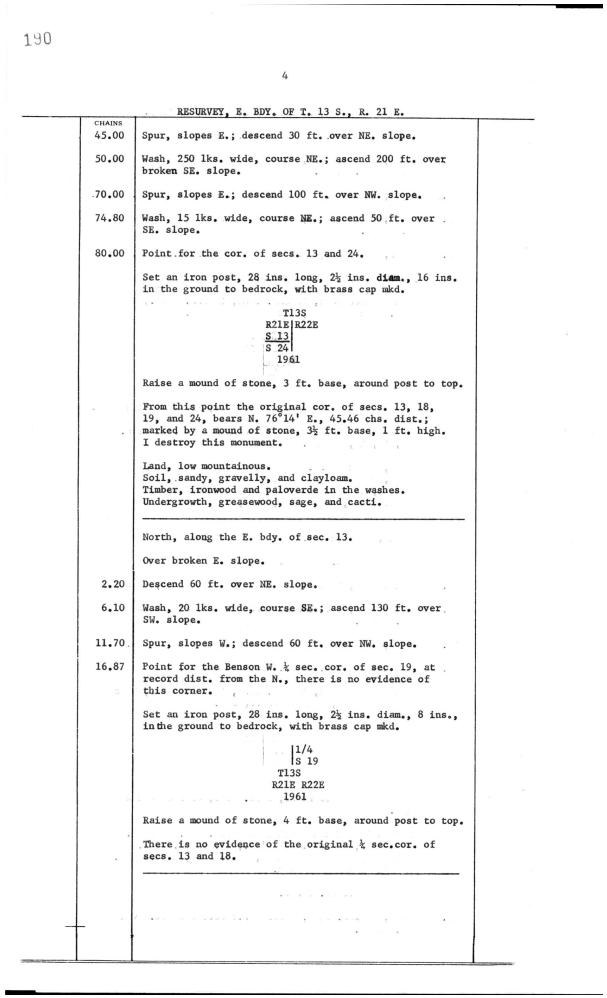

190

4

RESURVEY, E. BDY. OF T. 13 S., R. 21 E.

CHAINS	
45.00	Spur, slopes E.; descend 30 ft. over NE. slope.
50.00	Wash, 250 lks. wide, course NE.; ascend 200 ft. over broken SE. slope.
70.00	Spur, slopes E.; descend 100 ft. over NW. slope.
74.80	Wash, 15 lks. wide, course NE.; ascend 50 ft. over SE. slope.
80.00	Point for the cor. of secs. 13 and 24.
	Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd.
	T13S R21E|R22E S 13| S 24| 1961
	Raise a mound of stone, 3 ft. base, around post to top.
	From this point the original cor. of secs. 13, 18, 19, and 24, bears N. 76°14' E., 45.46 chs. dist.; marked by a mound of stone, 3½ ft. base, 1 ft. high. I destroy this monument.
	Land, low mountainous. Soil, sandy, gravelly, and clayloam. Timber, ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti.
	North, along the E. bdy. of sec. 13.
	Over broken E. slope.
2.20	Descend 60 ft. over NE. slope.
6.10	Wash, 20 lks. wide, course SE.; ascend 130 ft. over SW. slope.
11.70	Spur, slopes W.; descend 60 ft. over NW. slope.
16.87	Point for the Benson W. ¼ sec. cor. of sec. 19, at record dist. from the N., there is no evidence of this corner.
	Set an iron post, 28 ins. long, 2½ ins. diam., 8 ins., in the ground to bedrock, with brass cap mkd.
	|1/4 |S 19 T13S R21E R22E 1961
	Raise a mound of stone, 4 ft. base, around post to top.
	There is no evidence of the original ¼ sec.cor. of secs. 13 and 18.

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 9 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			RESURVEY, E. BDY. OF T. 13 S., R. 21 E.				
2	45.00	●	Spur, slopes E.; descend 30 ft. over NE. slope.				
3	50.00	◉	Wash, 250 lks. wide, course NE. · Wash, 250 lks. wide, course NE.; ascend 200 ft. over broken SE. slope.				
4	70.00	●	Spur, slopes E.; descend 100 ft. over NW. slope.				
5	74.80	◉	Wash, 15 lks. wide, course NE. · Wash, 15 lks. wide, course NE.; ascend 50 ft. over SE. slope.				
6	80.00	▲	**Cor. Secs. 13-18-19-24 · Point for the cor. of secs. 13 and 24. Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, with brass cap mkd. T13S R21E| R22E S 13| S 24| 1961 Raise a mound of stone, 3 ft. base, around post to top. From this point the original cor. of secs. 13, 18, 19, and 24, bears N. 76°14' E., 45.46 chs. dist.; marked by a mound of stone, 3½ ft. base, 1 ft. high. I destroy this monument. Land, low mountainous. Soil, sandy, gravelly, and clayloam. Timber, ironwood and paloverde in the washes. Undergrowth, greasewood, sage, and cacti. North, along the E. bdy. of sec. 13. Over broken E. slope.**				100400
7	2.20	●	Descend 60 ft. over NE. slope.				
8	6.10	◉	Wash, 20 lks. wide, course SE. · Wash, 20 lks. wide, course SE.; ascend 130 ft. over SW. slope.				
9	11.70	●	Spur, slopes W.; descend 60 ft. over NW. slope.				
10	16.87	○	**Cor. Secs. 13-18-19-24 · Point for the Benson W. ¼ sec. cor. of sec. 19, at record dist. from the N., there is no evidence of this corner. Set an iron post, 28 ins. long, 2½ ins. diam., 8 ins., in the ground to bedrock, with brass cap mkd. |1/4 |S 19 T13S R21E R22E 1961 Raise a mound of stone, 4 ft. base, around post to top. There is no evidence of the original ¼ sec.cor. of secs. 13 and 18.**				100400

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

1/16 corner, Secs. 13, 18, 19 & 24

GCDB code: 100400

NOTABLE CALLS ALONG RUN

ch 6.10 Wash, 20 lks. wide, course SE. — Wash, 20 lks. wide, course SE.; ascend 130 ft. over SW. slope.

ch 50.00 Wash, 250 lks. wide, course NE. — Wash, 250 lks. wide, course NE.; ascend 200 ft. over broken SE. slope.

ch 74.80 Wash, 15 lks. wide, course NE. — Wash, 15 lks. wide, course NE.; ascend 50 ft. over SE. slope.

END CORNER (ch 80.00)

Corner, Secs. 13, 18, 19 & 24

GCDB code: 100400

9 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

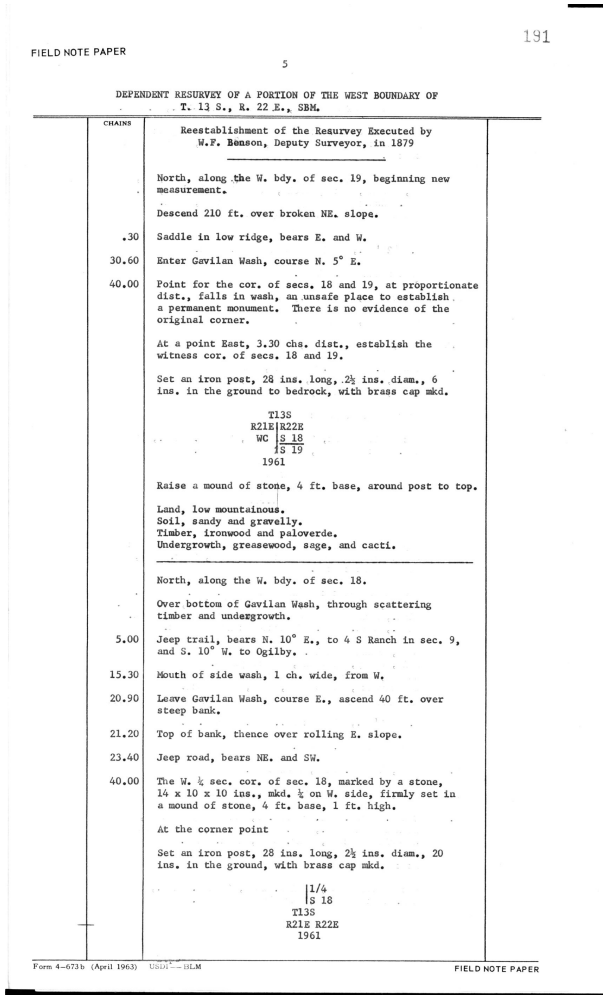

191

FIELD NOTE PAPER

5

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY OF T. 13 S., R. 22 E., SBM.

CHAINS	
	Reestablishment of the Resurvey Executed by W.F. Benson, Deputy Surveyor, in 1879
	North, along the W. bdy. of sec. 19, beginning new measurement.
	Descend 210 ft. over broken NE. slope.
.30	Saddle in low ridge, bears E. and W.
30.60	Enter Gavilan Wash, course N. 5° E.
40.00	Point for the cor. of secs. 18 and 19, at proportionate dist., falls in wash, an unsafe place to establish a permanent monument. There is no evidence of the original corner.
	At a point East, 3.30 chs. dist., establish the witness cor. of secs. 18 and 19.
	Set an iron post, 28 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, with brass cap mkd.
	T13S R21E|R22E WC |S 18 |S 19 1961
	Raise a mound of stone, 4 ft. base, around post to top.
	Land, low mountainous. Soil, sandy and gravelly. Timber, ironwood and paloverde. Undergrowth, greasewood, sage, and cacti.
	North, along the W. bdy. of sec. 18.
	Over bottom of Gavilan Wash, through scattering timber and undergrowth.
5.00	Jeep trail, bears N. 10° E., to 4 S Ranch in sec. 9, and S. 10° W. to Ogilby.
15.30	Mouth of side wash, 1 ch. wide, from W.
20.90	Leave Gavilan Wash, course E., ascend 40 ft. over steep bank.
21.20	Top of bank, thence over rolling E. slope.
23.40	Jeep road, bears NE. and SW.
40.00	The W. ¼ sec. cor. of sec. 18, marked by a stone, 14 x 10 x 10 ins., mkd. ¼ on W. side, firmly set in a mound of stone, 4 ft. base, 1 ft. high.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
	|1/4 |S 18 T13S R21E R22E 1961

Form 4-673 b (April 1963) USDI—BLM FIELD NOTE PAPER

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 10 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY OF T. 13 S., R. 22 E., SBM.				
2			Reestablishment of the Resurvey Executed by W.F. Benson, Deputy Surveyor, in 1879				
3			North, along the W. bdy. of sec. 19, beginning new measurement.				
4		●	Descend 210 ft. over broken NE. slope.				
5	0.30	●	Saddle in low ridge, bears E. and W.				
6	30.60	●	Gavilan Wash · Enter Gavilan Wash, course N. 5° E.				
7	40.00	△	**Cor. Secs. 18-19 · Point for the cor. of secs. 18 and 19, at proportionate dist., falls in wash, an unsafe place to establish a permanent monument. There is no evidence of the original corner. At a point East, 3.30 chs. dist., establish the witness cor. of secs. 18 and 19. Set an iron post, 28 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, with brass cap mkd. T13S R21E|R22E WC |S 18 |S 19 1961 Raise a mound of stone, 4 ft. base, around post to top. Land, low mountainous. Soil, sandy and gravelly. Timber, ironwood and paloverde. Undergrowth, greasewood, sage, and cacti. North, along the W. bdy. of sec. 18. Over bottom of Gavilan Wash, through scattering timber and undergrowth.**				100400
8	5.00	■	Jeep trail, bears N. 10° E., to 4 S Ranch in sec. 9, and S. 10° W. to Ogilby.				
9	15.30	●	side wash · Mouth of side wash, 1 ch. wide, from W.				
10	20.90	●	Gavilan Wash · Leave Gavilan Wash, course E., ascend 40 ft. over steep bank.				
11	21.20	●	Top of bank, thence over rolling E. slope.				
12	23.40	■	Jeep road, bears NE. and SW.				
13	40.00	△	**¼ Cor. Sec. 18 N · The W. ¼ sec. cor. of sec. 18, marked by a stone, 14 x 10 x 10 ins., mkd. ¼ on W. side, firmly set in a mound of stone, 4 ft. base, 1 ft. high. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. |1/4 |S 18 T13S R21E R22E 1961**				140500

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Secs. 18 & 19

GCDB code: 100400

NOTABLE CALLS ALONG RUN

ch 15.30 side wash — Mouth of side wash, 1 ch. wide, from W.

ch 20.90 Gavilan Wash — Leave Gavilan Wash, course E., ascend 40 ft. over steep bank.

ch 30.60 Gavilan Wash — Enter Gavilan Wash, course N. 5° E.

END CORNER (ch 40.00)

¼ corner, Sec. 18

GCDB code: 140500

9 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

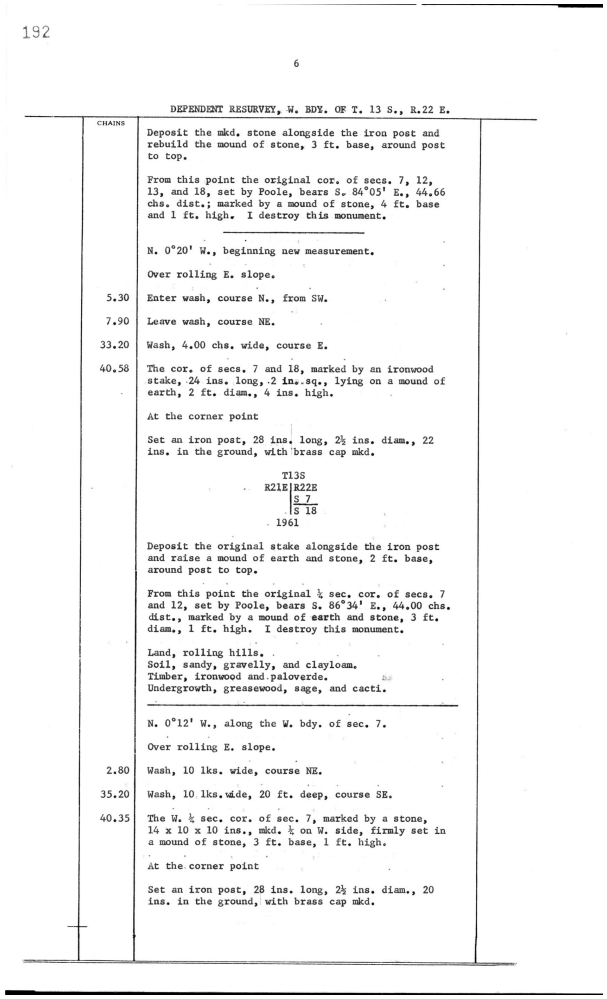

192

6

DEPENDENT RESURVEY, W. BDY. OF T. 13 S., R.22 E.

CHAINS	
	Deposit the mkd. stone alongside the iron post and rebuild the mound of stone, 3 ft. base, around post to top.
	From this point the original cor. of secs. 7, 12, 13, and 18, set by Poole, bears S. 84°05' E., 44.66 chs. dist.; marked by a mound of stone, 4 ft. base and 1 ft. high. I destroy this monument.
	N. 0°20' W., beginning new measurement.
	Over rolling E. slope.
5.30	Enter wash, course N., from SW.
7.90	Leave wash, course NE.
33.20	Wash, 4.00 chs. wide, course E.
40.58	The cor. of secs. 7 and 18, marked by an ironwood stake, 24 ins. long, 2 in. sq., lying on a mound of earth, 2 ft. diam., 4 ins. high.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	T13S R21E|R22E S 7 S 18 1961
	Deposit the original stake alongside the iron post and raise a mound of earth and stone, 2 ft. base, around post to top.
	From this point the original ¼ sec. cor. of secs. 7 and 12, set by Poole, bears S. 86°34' E., 44.00 chs. dist., marked by a mound of earth and stone, 3 ft. diam., 1 ft. high. I destroy this monument.
	Land, rolling hills. Soil, sandy, gravelly, and clayloam. Timber, ironwood and paloverde. Undergrowth, greasewood, sage, and cacti.
	N. 0°12' W., along the W. bdy. of sec. 7.
	Over rolling E. slope.
2.80	Wash, 10 lks. wide, course NE.
35.20	Wash, 10 lks. wide, 20 ft. deep, course SE.
40.35	The W. ¼ sec. cor. of sec. 7, marked by a stone, 14 x 10 x 10 ins., mkd. ¼ on W. side, firmly set in a mound of stone, 3 ft. base, 1 ft. high.
	At the corner point
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 8 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			DEPENDENT RESURVEY, W. BDY. OF T. 13 S., R.22 E.				
2			Deposit the mkd. stone alongside the iron post and rebuild the mound of stone, 3 ft. base, around post to top.				
3		▲	**Cor. Secs. 7-12-13-18 · From this point the original cor. of secs. 7, 12, 13, and 18, set by Poole, bears S. 84°05' E., 44.66 chs. dist.; marked by a mound of stone, 4 ft. base and 1 ft. high. I destroy this monument.**				100500
4			N. 0°20' W., beginning new measurement.				
5			Over rolling E. slope.				
6	5.30	●	wash · Enter wash, course N., from SW.				
7	7.90	●	wash · Leave wash, course NE.				
8	33.20	●	Wash, 4.00 chs. wide, course E.				
9	40.58	△	**Cor. Secs. 7-12-13-18 · The cor. of secs. 7 and 18, marked by an ironwood stake, 24 ins. long, 2 in. sq., lying on a mound of earth, 2 ft. diam., 4 ins. high. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd. T13S R21E|R22E S 7 S 18 1961 Deposit the original stake alongside the iron post and raise a mound of earth and stone, 2 ft. base, around post to top. From this point the original ¼ sec. cor. of secs. 7 and 12, set by Poole, bears S. 86°34' E., 44.00 chs. dist., marked by a mound of earth and stone, 3 ft. diam., 1 ft. high. I destroy this monument. Land, rolling hills. Soil, sandy, gravelly, and clayloam. Timber, ironwood and paloverde. Undergrowth, greasewood, sage, and cacti. N. 0°12' W., along the W. bdy. of sec. 7. Over rolling E. slope.**				100500
10	2.80	●	Wash, 10 lks. wide, course NE.				
11	35.20	●	Wash, 10 lks. wide, 20 ft. deep, course SE.				
12	40.35	△	**¼ Cor. Sec. 7 N · The W. ¼ sec. cor. of sec. 7, marked by a stone, 14 x 10 x 10 ins., mkd. ¼ on W. side, firmly set in a mound of stone, 3 ft. base, 1 ft. high. At the corner point Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.**				140600

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Sec. 7

GCDB code: 140600

NOTABLE CALLS ALONG RUN

ch 2.80 Wash, 10 lks. wide, course NE. — Wash, 10 lks. wide, course NE.
ch 5.30 wash — Enter wash, course N., from SW.
ch 7.90 wash — Leave wash, course NE.
ch 33.20 Wash, 4.00 chs. wide, course E. — Wash, 4.00 chs. wide, course E.
ch 35.20 Wash, 10 lks. wide, 20 ft. deep, course SE. — Wash, 10 lks. wide, 20 ft. deep, course SE.

END CORNER (ch 40.58)

¼ corner, Secs. 7, 12, 13 & 18

GCDB code: 100500

7 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

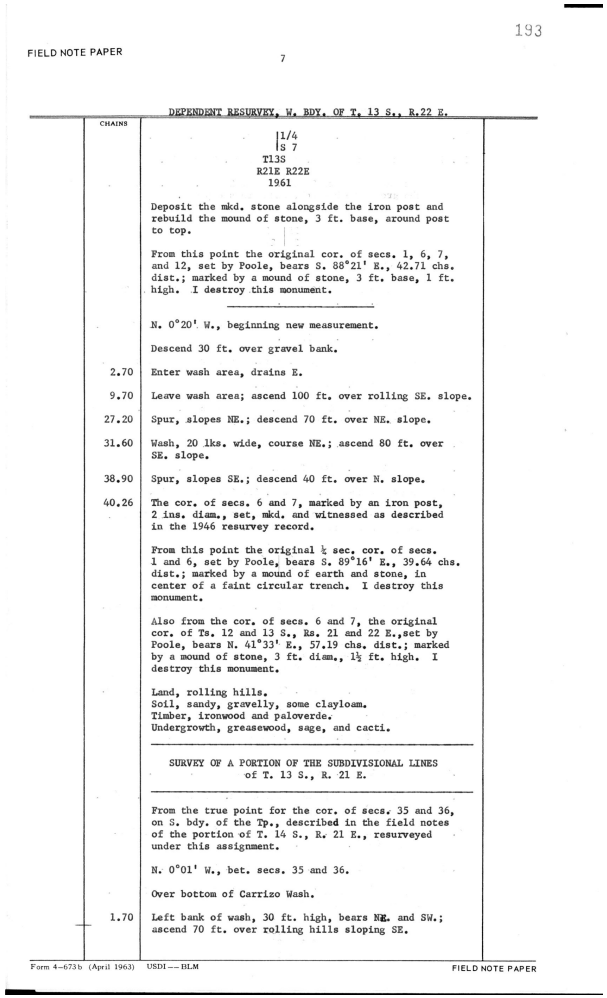

193

FIELD NOTE PAPER

7

DEPENDENT RESURVEY, W. BDY. OF T. 13 S., R.22 E.

CHAINS	
	1/4 S 7 T13S R21E R22E 1961
	Deposit the mkd. stone alongside the iron post and rebuild the mound of stone, 3 ft. base, around post to top.
	From this point the original cor. of secs. 1, 6, 7, and 12, set by Poole, bears S. 88°21' E., 42.71 chs. dist.; marked by a mound of stone, 3 ft. base, 1 ft. high. I destroy this monument.
	N. 0°20' W., beginning new measurement.
	Descend 30 ft. over gravel bank.
2.70	Enter wash area, drains E.
9.70	Leave wash area; ascend 100 ft. over rolling SE. slope.
27.20	Spur, slopes NE.; descend 70 ft. over NE. slope.
31.60	Wash, 20 lks. wide, course NE.; ascend 80 ft. over SE. slope.
38.90	Spur, slopes SE.; descend 40 ft. over N. slope.
40.26	The cor. of secs. 6 and 7, marked by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the 1946 resurvey record.
	From this point the original ¼ sec. cor. of secs. 1 and 6, set by Poole, bears S. 89°16' E., 39.64 chs. dist.; marked by a mound of earth and stone, in center of a faint circular trench. I destroy this monument.
	Also from the cor. of secs. 6 and 7, the original cor. of Ts. 12 and 13 S., Rs. 21 and 22 E.,set by Poole, bears N. 41°33' E., 57.19 chs. dist.; marked by a mound of stone, 3 ft. diam., 1½ ft. high. I destroy this monument.
	Land, rolling hills. Soil, sandy, gravelly, some clayloam. Timber, ironwood and paloverde. Undergrowth, greasewood, sage, and cacti.
	SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES of T. 13 S., R. 21 E.
	From the true point for the cor. of secs. 35 and 36, on S. bdy. of the Tp., described in the field notes of the portion of T. 14 S., R. 21 E., resurveyed under this assignment.
	N. 0°01' W., bet. secs. 35 and 36.
	Over bottom of Carrizo Wash.
1.70	Left bank of wash, 30 ft. high, bears NE. and SW.; ascend 70 ft. over rolling hills sloping SE.

Form 4–673b (April 1963) USDI — BLM FIELD NOTE PAPER

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 9 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			DEPENDENT RESURVEY, W. BDY. OF T. 13 S., R.22 E.				
2			|1/4 |S 7 T13S R21E R22E 1961				
3			Deposit the mkd. stone alongside the iron post and rebuild the mound of stone, 3 ft. base, around post to top.				
4		▲	**Cor. Secs. 1-6-7-12 · From this point the original cor. of secs. 1, 6, 7, and 12, set by Poole, bears S. 88°21' E., 42.71 chs. dist.; marked by a mound of stone, 3 ft. base, 1 ft. high. I destroy this monument.**				100600
5			N. 0°20' W., beginning new measurement.				
6		●	Descend 30 ft. over gravel bank.				
7	2.70	●	Enter wash area, drains E.				
8	9.70	▼	Leave wash area; ascend 100 ft. over rolling SE. slope.				
9	27.20	●	Spur, slopes NE.; descend 70 ft. over NE. slope.				
10	31.60	●	Wash, 20 lks. wide, course NE. · Wash, 20 lks. wide, course NE.; ascend 80 ft. over SE. slope.				
11	38.90	●	Spur, slopes SE.; descend 40 ft. over N. slope.				
12	40.26	△	**Cor. Secs. 1-6-7-12 · The cor. of secs. 6 and 7, marked by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the 1946 resurvey record. From this point the original ¼ sec. cor. of secs. 1 and 6, set by Poole, bears S. 89°16' E., 39.64 chs. dist.; marked by a mound of earth and stone, in center of a faint circular trench. I destroy this monument. Also from the cor. of secs. 6 and 7, the original cor. of Ts. 12 and 13 S., Rs. 21 and 22 E.,set by Poole, bears N. 41°33' E., 57.19 chs. dist.; marked by a mound of stone, 3 ft. diam., 1½ ft. high. I destroy this monument. Land, rolling hills. Soil, sandy, gravelly, some clayloam. Timber, ironwood and paloverde. Undergrowth, greasewood, sage, and cacti. SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES of T. 13 S., R. 21 E. From the true point for the cor. of secs. 35 and 36, on S. bdy. of the Tp., described in the field notes of the portion of T. 14 S., R. 21 E., resurveyed under this assignment. N. 0°01' W., bet. secs. 35 and 36. Over bottom of Carrizo Wash.**				100600
13	1.70	●	Left bank of wash, 30 ft. high, bears NE. and SW. · Left bank of wash, 30 ft. high, bears NE. and SW.; ascend 70 ft. over rolling hills sloping SE.				

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Secs. 1, 6, 7 & 12

GCDB code: 100600

NOTABLE CALLS ALONG RUN

ch 1.70 Left bank of wash, 30 ft. high, bears NE. and SW. — Left bank of wash, 30 ft. high, bears NE. and SW.; ascend 70 ft. over rolling hills sloping SE.

ch 2.70 Enter wash area, drains E. — Enter wash area, drains E.

ch 31.60 Wash, 20 lks. wide, course NE. — Wash, 20 lks. wide, course NE.; ascend 80 ft. over SE. slope.

7 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

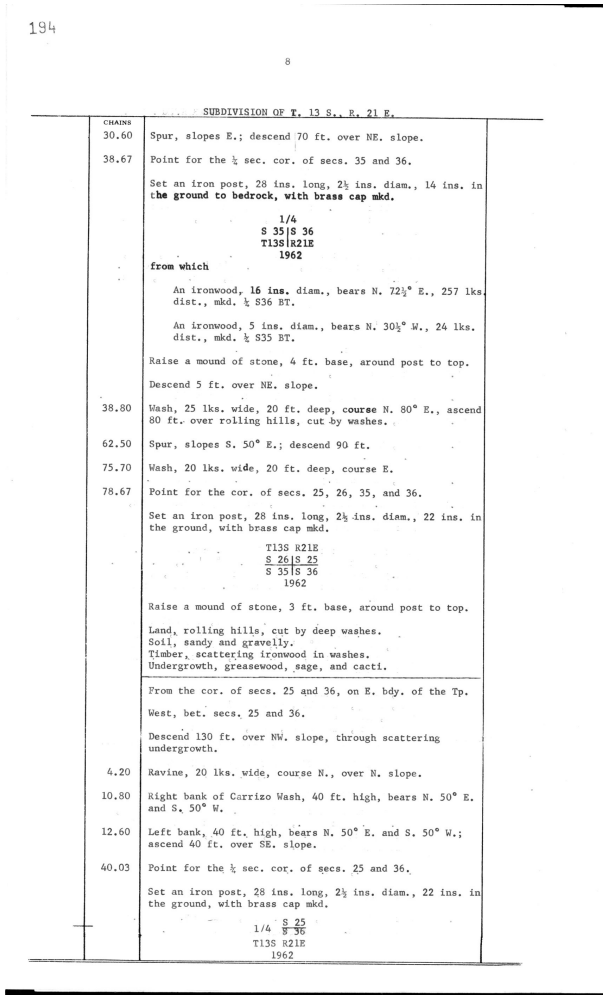

194

8

SUBDIVISION OF T. 13 S., R. 21 E.

CHAINS	
30.60	Spur, slopes E.; descend 70 ft. over NE. slope.
38.67	Point for the ¼ sec. cor. of secs. 35 and 36.
	Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd.
	1/4 S 35|S 36 T13S|R21E 1962
	from which
	An ironwood, 16 ins. diam., bears N. 72½° E., 257 lks. dist., mkd. ¼ S36 BT.
	An ironwood, 5 ins. diam., bears N. 30½° W., 24 lks. dist., mkd. ¼ S35 BT.
	Raise a mound of stone, 4 ft. base, around post to top.
	Descend 5 ft. over NE. slope.
38.80	Wash, 25 lks. wide, 20 ft. deep, course N. 80° E., ascend 80 ft. over rolling hills, cut by washes.
62.50	Spur, slopes S. 50° E.; descend 90 ft.
75.70	Wash, 20 lks. wide, 20 ft. deep, course E.
78.67	Point for the cor. of secs. 25, 26, 35, and 36.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	T13S R21E S 26|S 25 S 35|S 36 1962
	Raise a mound of stone, 3 ft. base, around post to top.
	Land, rolling hills, cut by deep washes. Soil, sandy and gravelly. Timber, scattering ironwood in washes. Undergrowth, greasewood, sage, and cacti.
	From the cor. of secs. 25 and 36, on E. bdy. of the Tp.
	West, bet. secs. 25 and 36.
	Descend 130 ft. over NW. slope, through scattering undergrowth.
4.20	Ravine, 20 lks. wide, course N., over N. slope.
10.80	Right bank of Carrizo Wash, 40 ft. high, bears N. 50° E. and S. 50° W.
12.60	Left bank, 40 ft. high, bears N. 50° E. and S. 50° W.; ascend 40 ft. over SE. slope.
40.03	Point for the ¼ sec. cor. of secs. 25 and 36.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	1/4 S 25 / S 36 T13S R21E 1962

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 10 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			SUBDIVISION OF T. 13 S., R. 21 E.				
2	30.60		Spur, slopes E.; descend 70 ft. over NE. slope.				
3	38.67		**Cor. Secs. 35-36 · Point for the ¼ sec. cor. of secs. 35 and 36. Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, with brass cap mkd. 1/4 S 35|S 36 T13S|R21E 1962 from which An ironwood, 16 ins. diam., bears N. 72½° E., 257 lks. dist., mkd. ¼ S36 BT. An ironwood, 5 ins. diam., bears N. 30½° W., 24 lks. dist., mkd. ¼ S35 BT. Raise a mound of stone, 4 ft. base, around post to top. Descend 5 ft. over NE. slope.**				600100
4	38.80		Wash, 25 lks. wide, 20 ft. deep, course N. 80° E. · Wash, 25 lks. wide, 20 ft. deep, course N. 80° E., ascend 80 ft. over rolling hills, cut by washes.				
5	62.50		Spur, slopes S. 50° E.; descend 90 ft.				
6	75.70		Wash, 20 lks. wide, 20 ft. deep, course E.				
7	78.67		**Cor. Secs. 25-26-35-36 · Point for the cor. of secs. 25, 26, 35, and 36. Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd. T13S R21E S 26|S 25 S 35|S 36 1962 Raise a mound of stone, 3 ft. base, around post to top. Land, rolling hills, cut by deep washes. Soil, sandy and gravelly. Timber, scattering ironwood in washes. Undergrowth, greasewood, sage, and cacti. From the cor. of secs. 25 and 36, on E. bdy. of the Tp. West, bet. secs. 25 and 36. Descend 130 ft. over NW. slope, through scattering undergrowth.**				600200
8	4.20		Ravine, 20 lks. wide, course N., over N. slope.				
9	10.80		Right bank of Carrizo Wash, 40 ft. high, bears N. 50° E. and S. 50° W.				
10	12.60		Left bank, 40 ft. high, bears N. 50° E. and S. 50° W. · Left bank, 40 ft. high, bears N. 50° E. and S. 50° W.; ascend 40 ft. over SE. slope.				
11	40.03		**Cor. Secs. 25-36 · Point for the ¼ sec. cor. of secs. 25 and 36. Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd. 1/4 S 25 S 36 T13S R21E 1962**				700200

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Amador County, CA

START CORNER (ch 0.00)

¼ corner, Secs. 35 & 36

GCDB code: 600100

NOTABLE CALLS ALONG RUN

ch 10.80 Right bank of Carrizo Wash, 40 ft. high, bears N. 50° E. and S. 50° W. — Right bank of Carrizo Wash, 40 ft. high, bears N. 50° E. and S. 50° W.

ch 12.60 Left bank, 40 ft. high, bears N. 50° E. and S. 50° W. — Left bank, 40 ft. high, bears N. 50° E. and S. 50° W.;

ch 38.80 Wash, 25 lks. wide, 20 ft. deep, course N. 80° E. — Wash, 25 lks. wide, 20 ft. deep, course N. 80° E.,

ch 40.93 ¼ corner, Secs. 25 & 36 — ascend 40 ft. over SE. slope.

ch 75.70 Wash, 20 lks. wide, 20 ft. deep, course E. — Wash, 20 lks. wide, 20 ft. deep, course E.

ascend 30 ft. over rolling hills, crossing washes.

END CORNER (ch 78.67)

Corner, Secs. 25, 26, 35 & 36

GCDB code: 600200

10 total calls · 0 geo-located · 0 with elevation

TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.