
T5S R34E

Idaho · Bannock · 8 document(s) · Generated 10/30/2026

67 calls · 26 geo-located · 0 terrain flags · 0 verifications

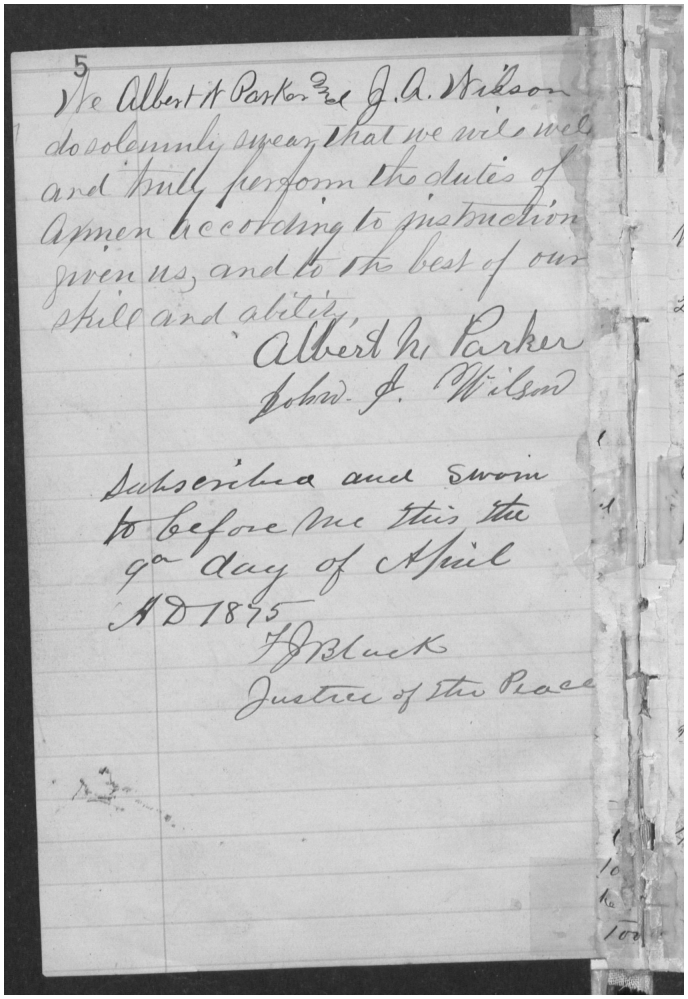

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	5 We Albert H Parker and J. A. Wilson do solemnly swear that we will well and truly perform the duties of Axmen according to instruction given us, and to the best of our skill and ability. Albert H. Parker John J. Wilson Subscribed and sworn to before me this the 9th day of April A.D. 1895 F J Black Justice of the Peace				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Bannock, Idaho

0 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

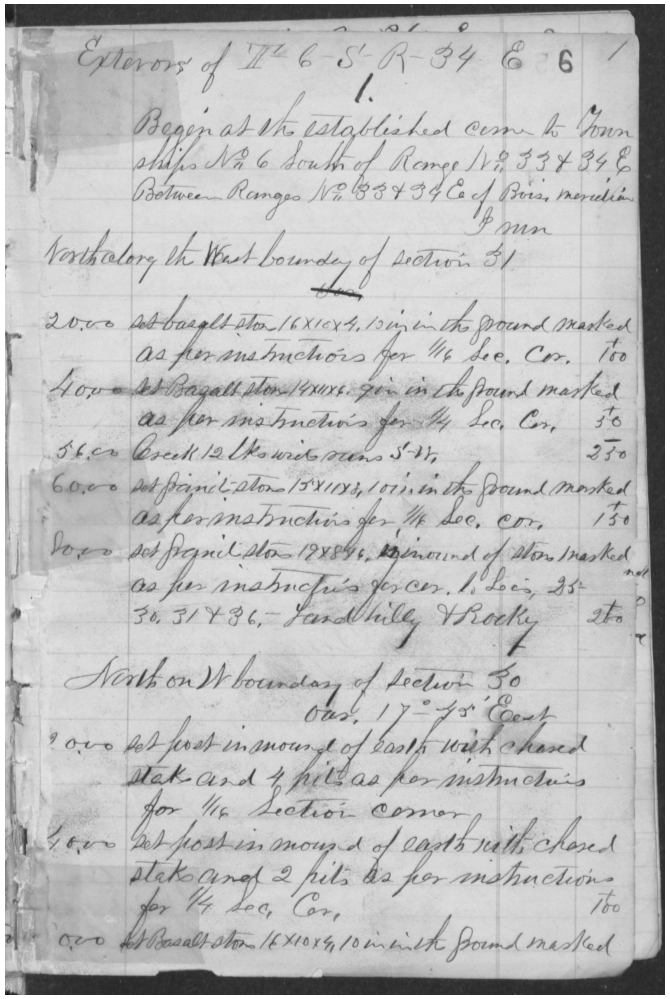

Exteriors of T. 6 S. R. 34 E. 6

1.

Begin at the established corner to Town ships Nos 6 South of Ranges Nos 33 & 34 E. Between Ranges Nos 33 & 34 E of Bois. meridian

Northalong the West boundary of section 31

20.00 set basalt stone 16 x 10 x 4, 13 in. in the ground marked as per instructions for 1/4 Sec. Cor. 1 00

40.00 set Basalt stone 14 x 11 x 4, 9 in. in the ground marked as per instructions for 1/4 Sec. Cor. 5 00

56.00 Creek 12 lks. wide runs S-E. 2 50

60.00 set Signal stone 15 x 11 x 4, 10 in. in the ground marked as per instructions for 1/4 Sec. cor. 1 50

80.00 set Signal stone 12 x 8 x 6, in mound of stone marked as per instructions for cor. of Secs. 25, 30, 31 & 36, Land hilly & Rocky 8 00

North on W boundary of Section 30 Var. 17° 45' East

0.00 set post in mound of earth with charred stake and 4 pits as per instructions for 1/16 Section corner

40.00 set post in mound of earth with charred stake and 2 pits as per instructions for 1/4 Sec. Cor. 1 00

80.00 set Basalt stone 16 x 10 x 4, 10 in. in the ground marked

PAGE SURVEY PLOT N up



Lat 42.94951–43.02216 · Lon -112.53559–-112.42697

5 located symbols · 2 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1	20.00	▲	**¼ Cor. Sec. 1 N · [0 Feet] · 20.00 Set small stone 16 x 10 x 4, 13 in. in the ground marked as per instructions for 1/4 Sec. Cor. 1 00**	4458 2	SV AER	43.0222,-112.4270	640700
2	40.00	▲	**¼ Cor. Sec. 5 N · [0 Feet] · 40.00 Set small stone 18 x 11 x 7, 9 in. in the ground marked as per instructions for 1/4 Sec. Cor. 5 00**	4421 2	AER	43.0220,-112.5062	240700
3	56.00	●	Creek 12 lks. wide runs S-E · 56.00 Creek 12 lks. wide runs S-E 2 50				
4	60.00	▲	**¼ Cor. Sec. 1 N · [0 Feet] · 60.00 Set signal stone 13 x 12 x 8, 10 in. in the ground marked as per instructions for 1/4 Sec. Cor. 1 50**	4458 2	SV AER	43.0222,-112.4270	640700
5	80.00	▲	**Cor. Secs. 25-30-31-36 · [4 Feet] · 80.00 Set signal stone 18 x 8 x 8, 8 in. in the ground marked and as per instructions for cor. of Secs. 30, 31 & 36. Land hilly & rocky 8 00**	4463 2	SV AER	42.9495,-112.5356	100200
6	0.00		0.00 Set post in mound of earth with charred stake and 4 pits as per instructions for the Section corner				
7	40.00	▲	**¼ Cor. Sec. 1 N · [0 Feet] · 40.00 Set post in mound of earth with charred stake and 2 pits as per instructions for 1/4 Sec. Cor. 1 00**	4458 2	SV AER	43.0222,-112.4270	640700
8	80.00	▲	**80.00 Set small stone 15 x 10 x 4, 10 in. in the ground marked.**				

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Bannock, Idaho

START CORNER (ch 0.00)

¼ corner, Sec. 1

GCDB accuracy: 0 Feet

GCDB code: 640700

NOTABLE CALLS ALONG RUN

ch 40.00 ¼ corner, Sec. 5
ch 40.00 ¼ corner, Sec. 1
ch 56.00 Creek 12 lks. wide runs S-E — Creek 12 lks. wide runs S-E 2 50
ch 60.00 ¼ corner, Sec. 1
ch 80.00 Corner, Secs. 25, 30, 31 & 36

END CORNER (ch 80.00)

Section corner


7 total calls · 5 geo-located · 5 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

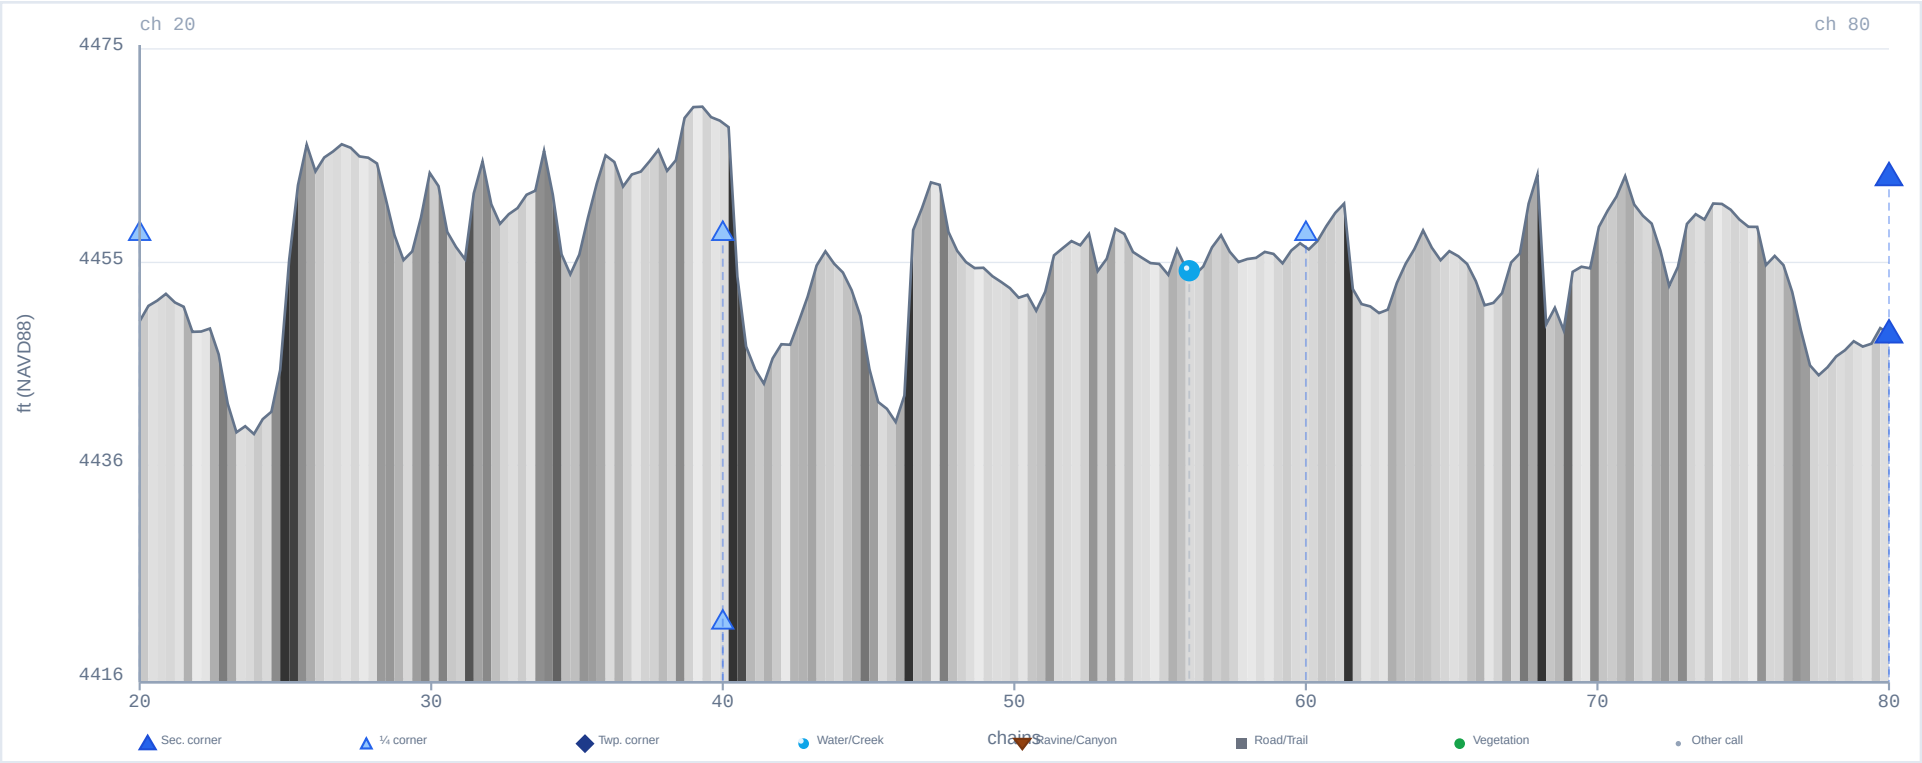

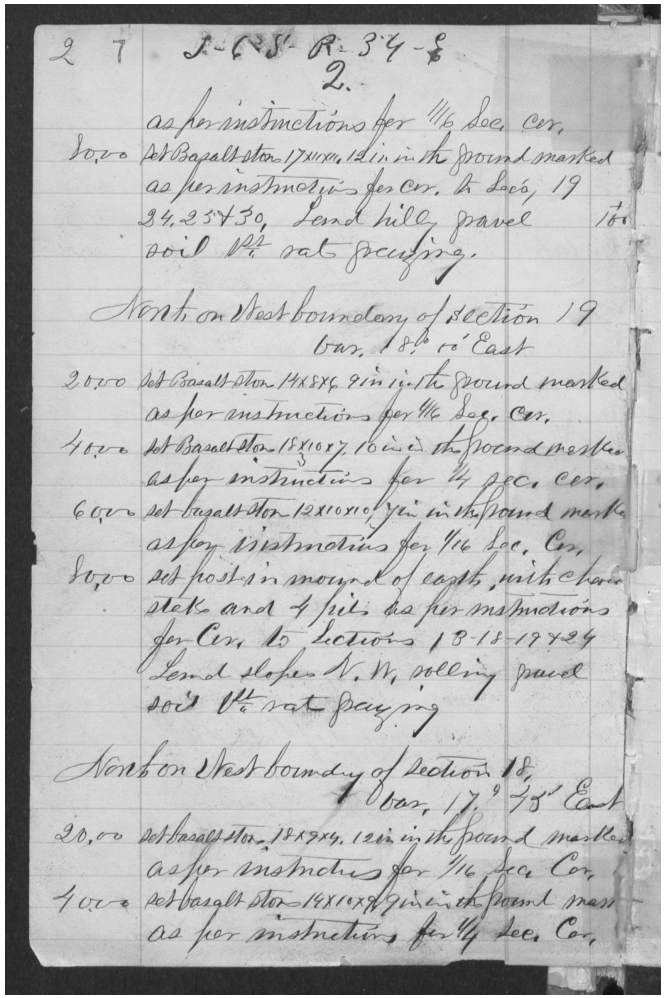

2 7 T-5S- R. 34-E
2.
as per instructions for 1/16 Sec. Cor.
80,00 set Basalt stone 17x12x12, 12 in. in the ground marked
as per instructions for Cor. to Secs. 19
24, 25 & 30, Sand hill, gravel
soil 1st rate, oat grazing.
North on West boundary of Section 19
Var. 8.8° to East
20,00 set Basalt stone 14x8x9, 9 in. in the ground marked
as per instructions for 1/16 Sec. Cor.
40,00 set Basalt stone 18x10x7, 10 in. in the ground marked
as per instructions for 1/4 Sec. Cor.
60,00 set basalt stone 12x10x10, 9 in. in the ground marke
as per instructions for 1/16 Sec. Cor,
80,00 set post in mound of earth, with char
stake and 4 pits as per instructions
for Cor. to Sections 13-18-19-24
Sand slopes N. W. rolling gravel
soil 1st rate grazing
North on West boundary of Section 18
Var. 7° 15' East
20,00 set basalt stone 18x9x14, 12 in. in the ground marked
as per instructions for 1/16 Sec. Cor.
40,00 set basalt stone 14x10x8, 9 in. in the ground mar
as per instructions for 1/4 Sec. Cor.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1	80.00	▲	**Cor. Secs. 19-24-25-30 · [3 Feet] · 80.00 as per instructions for 1/4 Sec. cor., Set Basalt stone 17x12x12, 12 in. in the ground marked as per instructions for cor. to Secs. 19 24 25 & 30, Sand hill, gravel, soil 1st rate, oat grazing.**	4450 2	SV AER	42.9640,-112.5356	100300
2			North on West boundary of Section 19 Var. 8.6 to East				
3	20.00	△	**100325 · [interpolated] · 20.00 set Basalt stone 14x8x9, 9 in. in the ground marked as per instructions for 1/4 Sec. Cor.**	4432 2	AER	42.9677,-112.5356	100325
4	40.00	△	**100350 · [3 Feet] · 40.00 set Basalt stone 18x10x7, 10 in. in the ground marked as per instructions for 1/4 Sec. cor.**	4434 2	AER	42.9713,-112.5356	100340
5	60.00	△	**100375 · [interpolated] · 60.00 set Basalt stone 12x10x10, 9 in. in the ground marked as per instructions for 1/4 Sec. Cor.**	4440 2	AER	42.9749,-112.5356	100375
6	80.00	▲	**Cor. Secs. 13-18-19-24 · [3 Feet] · 80.00 set Post in mound of earth with char stake and 1/2 pint char as per instructions for cor. to Sections 13, 18, 19 & 24, Sand slopes N.W., rolling, gravel, soil 1st rate, oat grazing.**	4461 2	AER	42.9785,-112.5356	100400
7			North on West boundary of Section 18 Var. 7.9 to 7.5 East				
8	20.00	△	**20.00 set Basalt stone 18x9x14, 12 in. in the ground marked as per instructions for 1/4 Sec. Cor.**				
9	40.00	△	**40.00 set Basalt stone 14x10x8, 9 in. in the ground marked as per instructions for 1/4 Sec. Cor.**				

PAGE SURVEY PLOT

N up



Lat 42.96402–42.97852 · Lon -112.53562–-112.53561

5 located symbols · 2 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Bannock, Idaho

START CORNER (ch 0.00)

Quarter corner

GCDB accuracy: interpolated

GCDB code: 100325

NOTABLE CALLS ALONG RUN

ch 20.00 Quarter corner
ch 40.00 Quarter corner
ch 40.00 Quarter corner
ch 60.00 Quarter corner
ch 80.00 Corner, Secs. 19, 24, 25 & 30

END CORNER (ch 80.00)

Corner, Secs. 13, 18, 19 & 24

GCDB accuracy: 3 Feet

GCDB code: 100400


7 total calls · 5 geo-located · 5 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

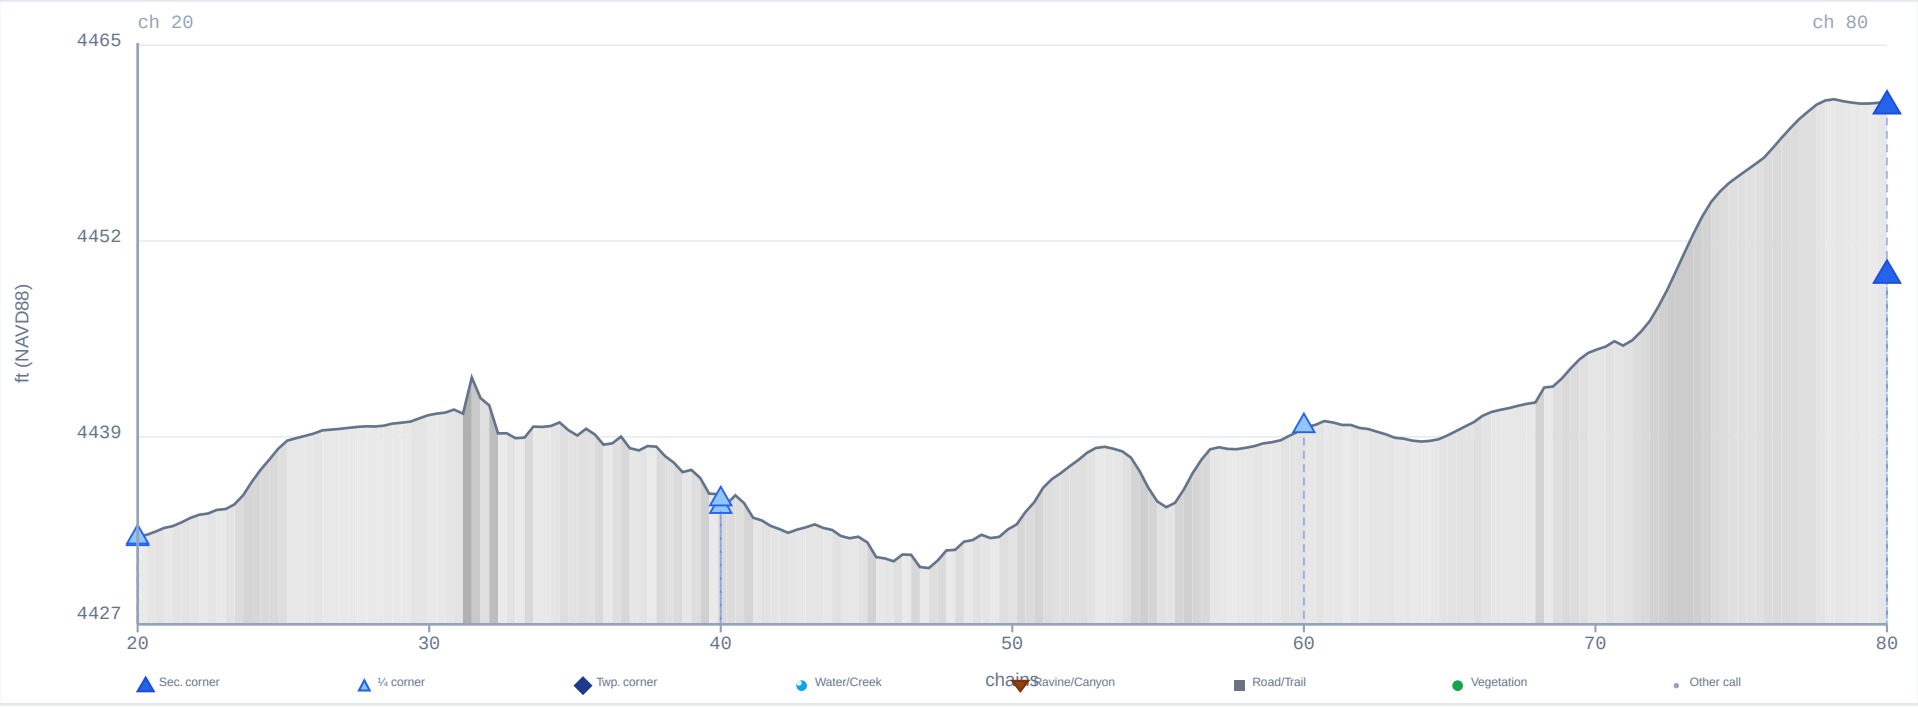

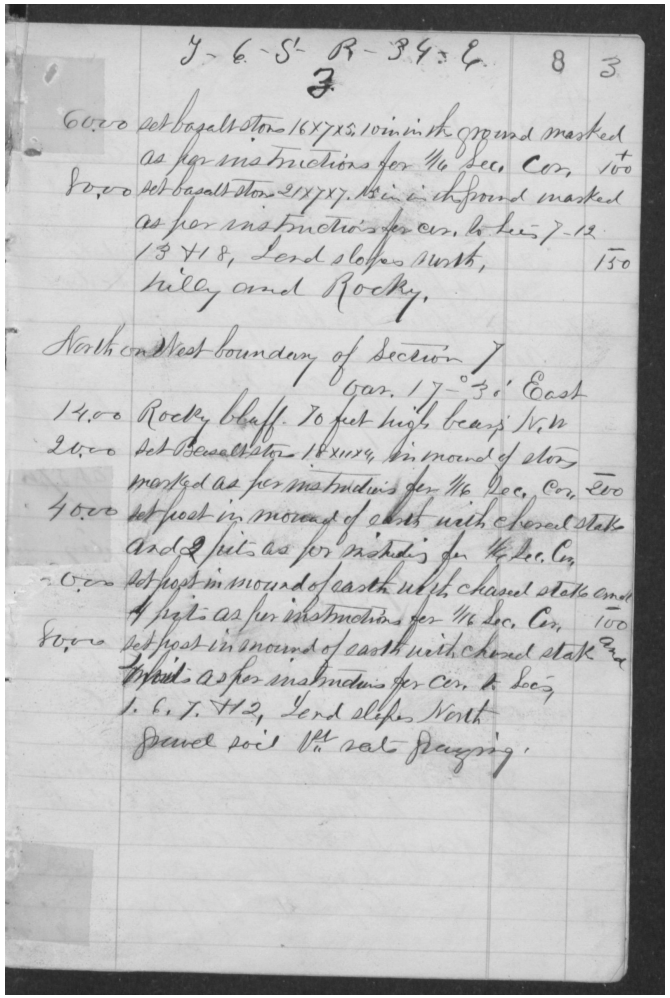

T-6-S- R-34-E. 8 3

7

6.00 set basalt stone 16x12x5, 10 in in the ground marked as per instructions for ¼ Sec. Cor. 100

8.00 set basalt stone 25x12x7, 12 in in the ground marked as per instructions for cor. to Secs. 7-12-13-18, Land slopes North, hilly and Rocky. 150

North on West boundary of Section 7

Var. 17° 30' East

14.00 Rocky bluff. 70 feet high bears N.W.

20.00 set basalt stone 18x12x4 in mound of stone marked as per instructions for ¼ Sec. Cor. 100

40.00 set post in mound of earth with charred stake and 4 pits as for instructions for ¼ Sec. Cor.

50.00 set post in mound of earth with charred stake and 4 pits as per instructions for ¼ Sec. Cor. 100

80.00 set post in mound of earth with charred stake marked as per instructions for cor. to Secs. 1, 6, 7 & 12, Land slopes North. Gravel soil, with scattered boulders.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1	6.00	△	**6.00 set basalt stone 16 x 12 x 5, 10 in in the ground marked as per instructions for ¼ Sec. Cor.**				
2		▲	**Cor. Secs. 7-12-13-18 · [4 Feet] · So 00 set basalt stone 25 x 12 x 7, 12 in in the ground marked as per instructions for cor. to Secs. 7 — 12, 13 & 18. Land slopes North, rocky and hilly.**	4365 2	AER	42.9930,-112.5356	100500
3	14.00	●	14.00 Rocky bluff, 70 feet high, bears N W.				
4	20.00	△	**20.00 set basalt stone, 18 x 12 x 4, in mound of earth marked as per instructions for ¼ Sec. Cor.**				
5	40.00	△	**40.00 set post in mound of earth with charred stake and 4 pits as for instructions for ¼ Sec. Cor.**				
6	50.00	△	**50.00 set post in mound of earth with charred stake and 4 pits as per instructions for ¼ Sec. Cor.**				
7	80.00	▲	**Cor. Secs. 1-6-7-12 · [3 Feet] · 80.00 set post in mound of earth with charred stake marked as per instructions for cor. to Secs. 1, 6, 7 & 12. Land slopes North. Gravel soil, with scattered boulders.**	4437 2	AER	43.0075,-112.5356	100600

PAGE SURVEY PLOT

N up





Lat 42.99302–43.00747 · Lon -112.53562–-112.53561

2 located symbols · 5 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Bannock, Idaho

START CORNER (ch 0.00)

Quarter corner

NOTABLE CALLS ALONG RUN

ch 20.00 Quarter corner
ch 40.00 Quarter corner
ch 50.00 Quarter corner

END CORNER (ch 80.00)

Corner, Secs. 1, 6, 7 & 12
GCDB accuracy: 3 Feet
GCDB code: 100600


6 total calls · 2 geo-located · 2 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

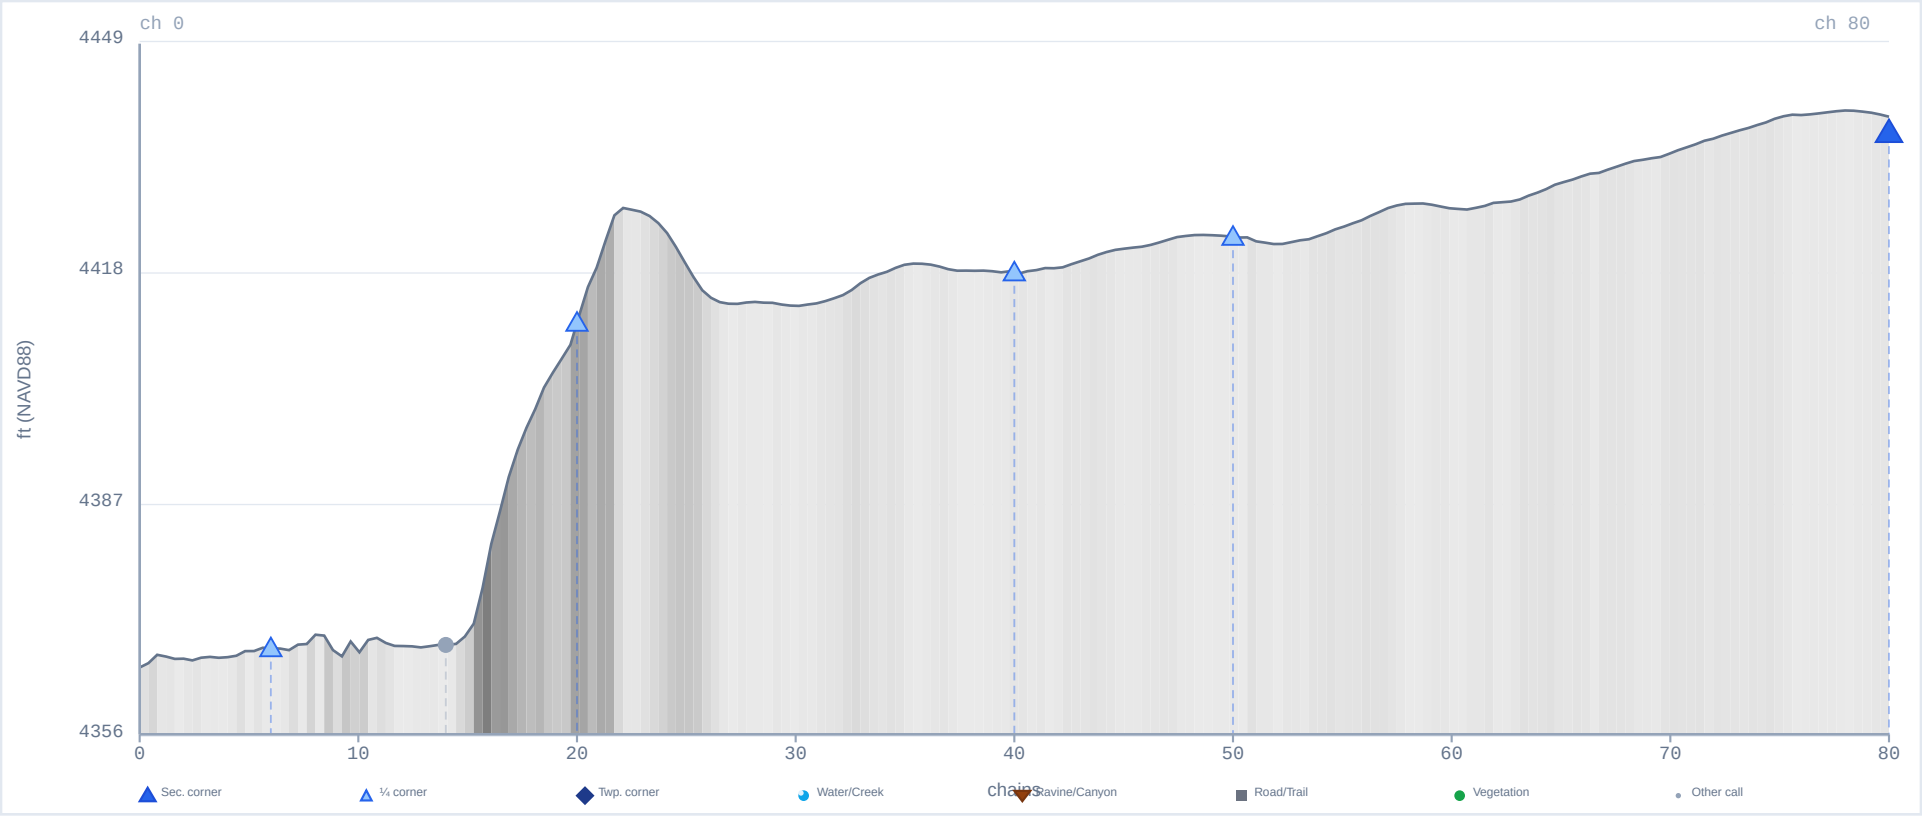

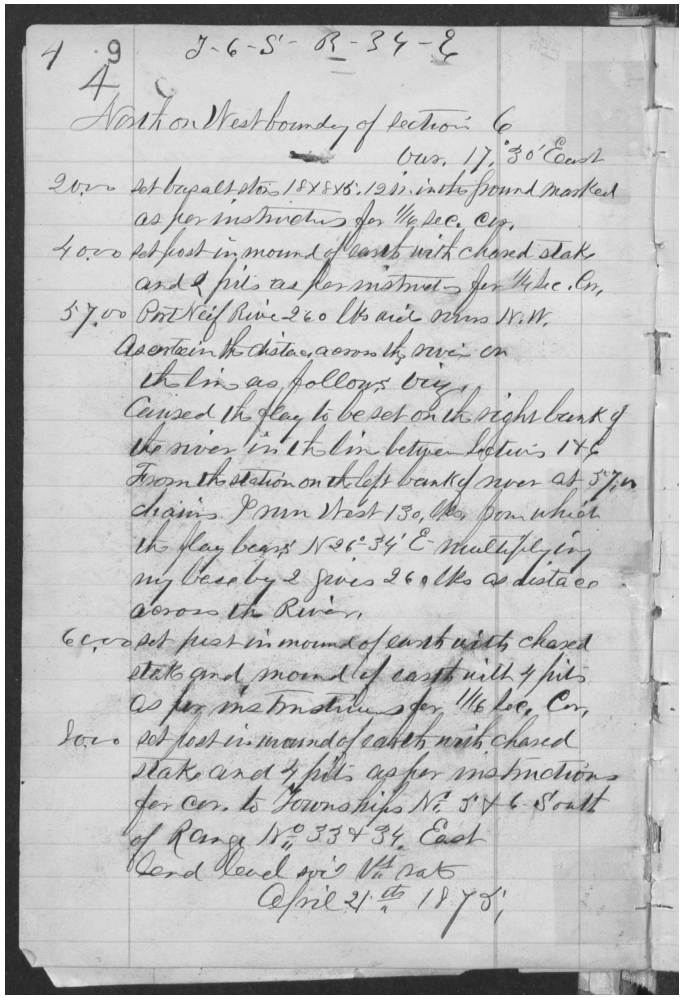

1 9 T-6-S- R-34-E
1 4
North on West boundy of Section 6
Vars. 17, 30' East
20.00 set basalt stone 18x8x8. 12 ins into ground marked as per instructions for 1/4 sec. cor.
40.00 set post in mound of earth with chared stake and 4 pits as per instructions for 1/4 sec. Cor,
57.00 Port Neif River 260 lks wide runs N.W.
Ascertain the station across the river on the line as follows viz,
Caused the flag to be set on the right bank of the river in the line between stations 140
From the station on the left bank of river at 57.00 chains. I run West 130 lks from which the flag bears N 26° 34' E multiplying my bearing by 2 gives 260 lks as distance across the River.
60.00 set post in mound of earth with chared stake and mound of earth with 4 pits as per instructions for 1/4 Sec. Cor.
80.00 set post in mound of earth with chared stake and 4 pits as per instructions for cor. to Townships No. 5 & 6 South of Range No. 33 & 34 East
Land level soil 1st rate
April 21st 1871

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1	20.00	△	**20.00 set ¼ post, pine 18 x 8 x 12 ins set 15 ins in the ground marked as for instructions for ¼ sec cor.**				
2	40.00	△	**40.00 set post in mound of earth with charred stake and 4 pits as for instructions for ¼ sec cor.**				
3	57.00	●	Port Neuf River. 260 lks wide runs N.W. · 57.00 Port Neuf River. 260 lks wide runs N.W. Ascertain the station across the river on the line as follows, viz: Caused the flag to be set on the high bank of the river, in the line between 40 & 57 c. From the station on the left bank of river at 57 c. chains. I run West 1.30 chs. from which the flag bears N 26° 34' E multiplying my bearing by 2 gives 2.60 chs a station across the river.				
4	60.00	△	**60.00 set post in mound of earth with charred stake and mound of earth with 4 pits as per instructions for ¼ Sec. Cor.**				
5	80.00	▲	**Township Corner (SW) · [0 Feet] · 80.00 set post in mound of earth with charred stake and 4 pits as per instructions for cor. to Township No. 6 S of Range No. 33 & 34 East. Land level soil 1st rate April 21st 1871**	4475 2	SV AER	42.9350,-112.5356	700700

PAGE SURVEY PLOT N up



Lat 42.93501–42.93501 · Lon -112.53558–-112.53558

1 located symbols · 4 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Bannock, Idaho

START CORNER (ch 0.00)

Quarter corner

NOTABLE CALLS ALONG RUN

ch 40.00 Quarter corner

ch 57.00 Port Neuf River. 260 lks wide runs N.W. — Port Neuf River. 260 lks wide runs N.W. Ascertain the station across the river on the line as follows, viz: Caused the flag to be set on the high bank of the river, in the line between 40 & 57 c. From the station on the left bank of river at 57 c. chains. I run West 1.30 chs. from which the flag bears N 26° 34' E multiplying my bearing by 2 gives 2.60 chs a station across the river.

ch 60.00 Quarter corner

END CORNER (ch 80.00)

Township corner (SW)

GCDB accuracy: 0 Feet

GCDB code: 700700

5 total calls · 1 geo-located · 1 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

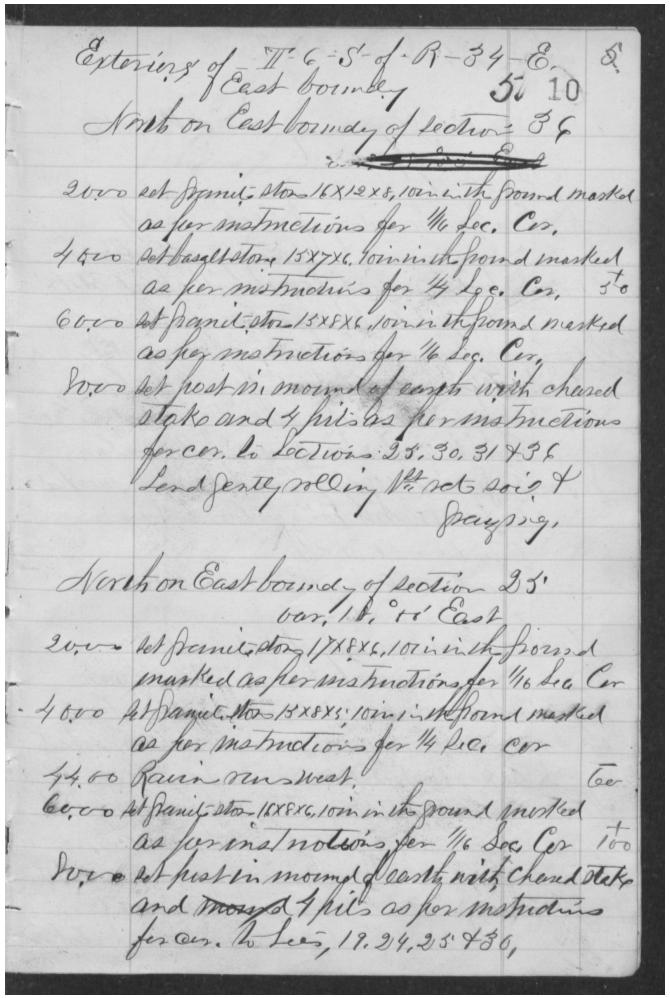

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1	20.00	△	[interpolated] · 20.00 Set granite stone 16x12x8, 10 in. in the ground marked as per instructions for 1/4 Sec. cor.	4472 2	SV AER	42.9386,-112.5356	
2	40.00	△	[interpolated] · 40.00 Set basalt stone 15x7x6, 10 in. in the ground marked as per instructions for 1/4 Sec. cor.	4469 2	SV AER	42.9423,-112.5356	
3	60.00	△	[interpolated] · 60.00 Set granite stone 15x8x8, 10 in. in the ground marked as per instructions for 1/4 Sec. cor.		SV AER	42.9459,-112.5356	
4	80.00	▲	Cor. Secs. 25-30-31-36 · [4 Feet] · 80.00 Set post in mound of earth with charred stake and 4 pits as per instructions for cor. to Sections 35, 30, 31 & 36.	4463 2	SV AER	42.9495,-112.5356	100200
5	0.00	▲	Cor. Secs. 35-36 · [15 Feet] · [inferred start anchor: SC3536]	4578 2	AER	42.9350,-112.4368	600100
6		●	Land gently rolling 1st rate soil & grazing.				
7			North on East boundary of Section 35 Var. 17° for East				
8	20.00	△	100225 · [interpolated] · 20.00 Set granite stone 17x8x8, 10 in. in the ground marked as per instructions for 1/4 Sec. cor.	4459 2	SV AER	42.9531,-112.5356	100225
9	40.00	△	100250 · [4 Feet] · 40.00 Set basalt stone 15x8x5, 10 in. in the ground marked as per instructions for 1/4 Sec. cor.	4464 2	SV AER	42.9568,-112.5356	100240
10	44.00	●	44.00 Rain runs west.	4458 2	SV AER	42.9575,-112.5356	
11	60.00	△	100275 · [interpolated] · 60.00 Set granite stone 18x8x8, 10 in. in the ground marked as per instructions for 1/4 Sec. cor.	4456 2	SV AER	42.9604,-112.5356	100275
12	80.00	▲	Cor. Secs. 25-26-35-36 · [15 Feet] · 80.00 Set post in mound of earth with charred stake and mound & pits as per instructions for cor. to sections 19, 24, 25 & 36.	4606 2	AER	42.9495,-112.4368	600200

PAGE SURVEY PLOT

N up



Lat 42.93498–42.96039 · Lon -112.53561–-112.43685

10 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Bannock, Idaho

START CORNER (ch 0.00)

Corner, Secs. 35 & 36

GCDB accuracy: 15 Feet

GCDB code: 600100

NOTABLE CALLS ALONG RUN

ch 20.00 Quarter corner
ch 20.00 Quarter corner
ch 40.00 Quarter corner
ch 40.00 Quarter corner
ch 60.00 Quarter corner
ch 60.00 Quarter corner
ch 80.00 Corner, Secs. 25, 30, 31 & 36

END CORNER (ch 80.00)

Corner, Secs. 25, 26, 35 & 36

GCDB accuracy: 15 Feet

GCDB code: 600200


10 total calls · 10 geo-located · 9 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

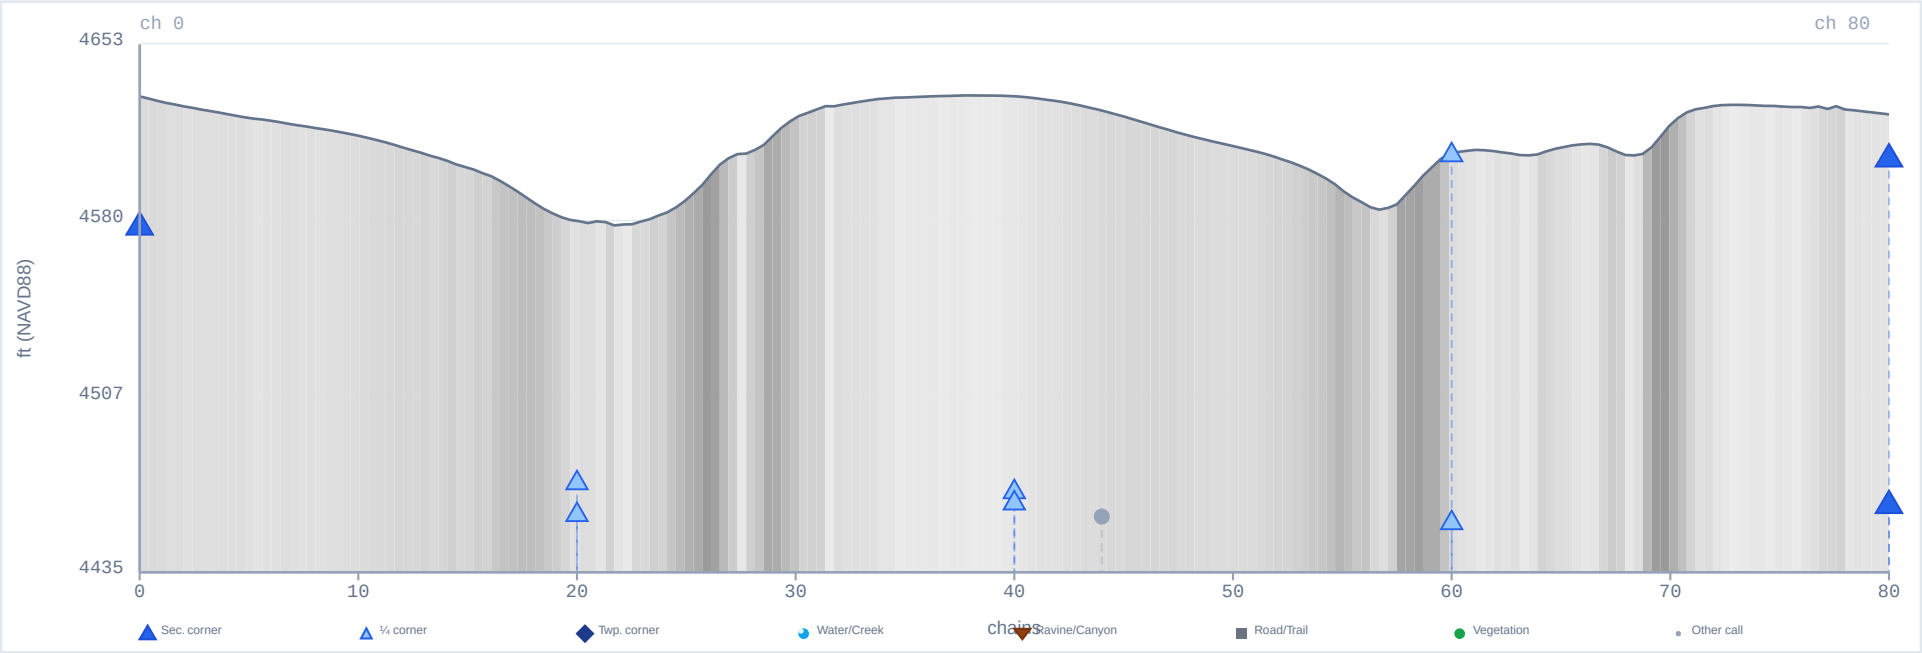

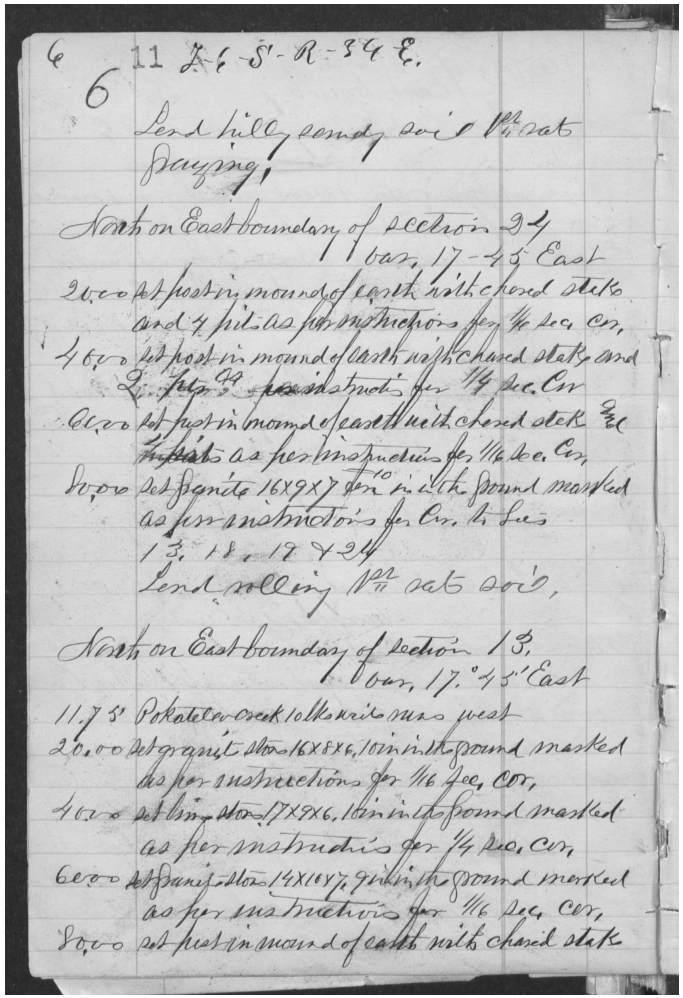

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1	2.00	△	2.00 Set post in mound of earth with charred stake and 2 pits as per instructions for 1/4 sec. cor,				
2	4.00	△	4.00 Set post in mound of earth with charred stake and 2 pits & 2nd rate soil for 1/4 sec. cor,				
3	6.00	△	6.00 Set post in mound of earth with charred stake and 2 pits as per instructions for 1/4 Sec. Cor.				
4	8.00	▲	Cor. Secs. 13-18-19-24 · [3 Feet] · 8.00 Set granite 16x9x7 ins. in the ground marked as per instructions for cor. B. Found marked as per instructions for cor. R secs. 13, 18, 19 & 24	4461 2	AER	42.9785,-112.5356	100400
5			Land rolling 1st rat soil,				
6	11.75	●	Pocatello creek 10 lks · 11.75 Pocatello creek 10 lks, air was west				
7	20.00	△	20.00 Set granite stone 16x8x6, 10 in in the ground marked as per instructions for 1/4 sec. cor,				
8	40.00	△	40.00 Set limestone stone 17x9x6, 10 in in the ground marked as per instructions for 1/4 sec. cor,				
9	60.00	△	60.00 Set granite stone 14x10x7, 9 in in the ground marked as per instructions for 1/4 sec. cor,				
10	80.00	▲	80.00 Set post in mound of earth with charred stake.				

PAGE SURVEY PLOT N up



Lat 42.97852–42.97852 · Lon -112.53561—112.53561

1 located symbols · 8 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Bannock, Idaho

START CORNER (ch 0.00)

Quarter corner

NOTABLE CALLS ALONG RUN

ch 4.00 Quarter corner
ch 6.00 Quarter corner
ch 8.00 Corner, Secs. 13, 18, 19 & 24
ch 11.75 Pocatello creek 10 lks — Pocatello creek 10 lks, air was west
ch 20.00 Quarter corner
ch 40.00 Quarter corner
ch 60.00 Quarter corner

END CORNER (ch 80.00)

Section corner

9 total calls · 1 geo-located · 1 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

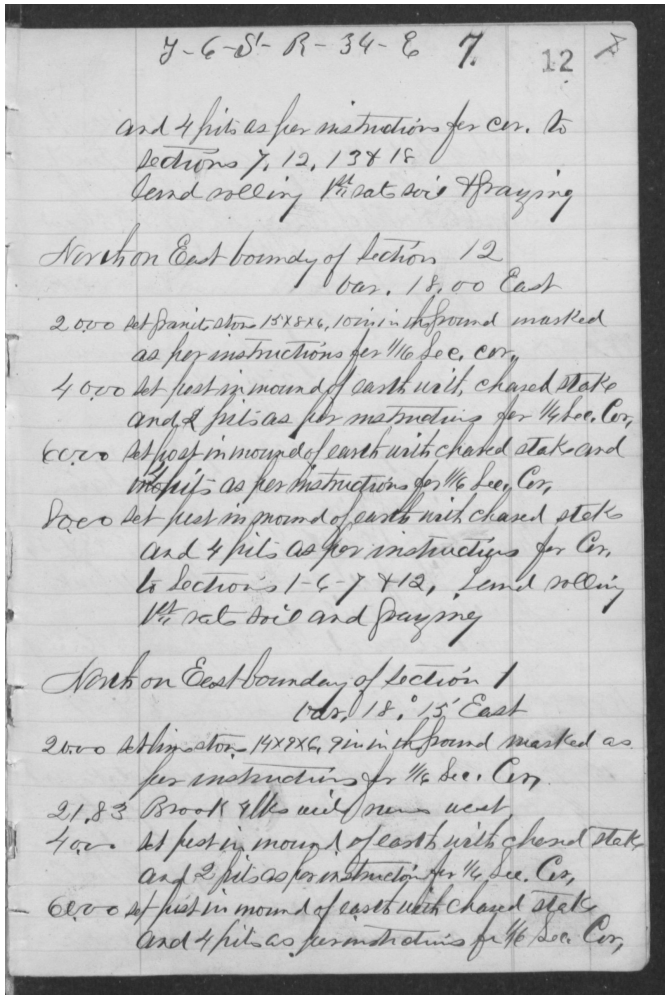

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1			7-6-S'R-34-E 7. 12.				
2		▲	**Cor. Secs. 7-12-13-18 · [4 Feet] · and 4 pits as per instructions for cor. to Sections 7, 12, 13 & 18.**	4365 2	AER	42.9930,-112.5356	100500
3		●	Land rolling, 1st rate soil and grazing.				
4			North on East Boundary of Section 12				
5			[at?] cor. 18.00 East				
6	20.00	△	**20.00 Set Sanit stone, 15x8x6, 10 in. in ground, marked as per instructions for 1/4 sec. cor.**				
7	40.00	△	**40.00 Set post in mound of earth with charred stake and 4 pits as per instructions for 1/4 sec. cor.**				
8	60.00	△	**60.00 Set post in mound of earth with charred stake and 4 pits as per instructions for 1/4 sec. cor.**				
9	80.00	▲	**Cor. Secs. 1-6-7-12 · [3 Feet] · 80.00 Set post in mound of earth with charred stake and 4 pits as per instructions for cor. to Sections 1, 6, 7 & 12.**	4437 2	AER	43.0075,-112.5356	100600
10		●	Land rolling, 1st rate soil and grazing.				
11			North on East Boundary of Section 1				
12			[at?] cor. 18.15 East				
13	20.00	△	**20.00 Set Sanit stone, 14x8x6, 9 in. in ground, marked as per instructions for 1/4 sec. cor.**				
14	21.83	●	Brook, 4 ft. wide runs west · 21.83 Brook, 4 ft. wide runs west				
15	40.00	△	**40.00 Set post in mound of earth with charred stake and 4 pits as per instructions for 1/4 sec. cor.**				
16	60.00	△	**60.00 Set post in mound of earth with charred stake and 4 pits as per instructions for 1/4 sec. cor.**				

PAGE SURVEY PLOT N up



Lat 42.99302–43.00747 · Lon -112.53562–-112.53561

2 located symbols · 9 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Bannock, Idaho

START CORNER (ch 0.00)

Quarter corner

NOTABLE CALLS ALONG RUN

ch 20.00 Quarter corner
ch 21.83 Brook, 4 ft. wide runs west — Brook, 4 ft. wide runs west
ch 40.00 Quarter corner
ch 40.00 Quarter corner
ch 60.00 Quarter corner
ch 60.00 Quarter corner

END CORNER (ch 80.00)

Corner, Secs. 1, 6, 7 & 12
GCDB accuracy: 3 Feet
GCDB code: 100600

8 total calls · 2 geo-located · 2 with elevation

TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

