
T14N R2E

ID · Adams County · 3 document(s) · Generated 11/2/2026

152 calls · 12 geo-located · 0 terrain flags · 0 verifications

Source review: conflicting or unverified locations are withheld. Original scans and transcriptions are preserved; missing positions are not estimated.

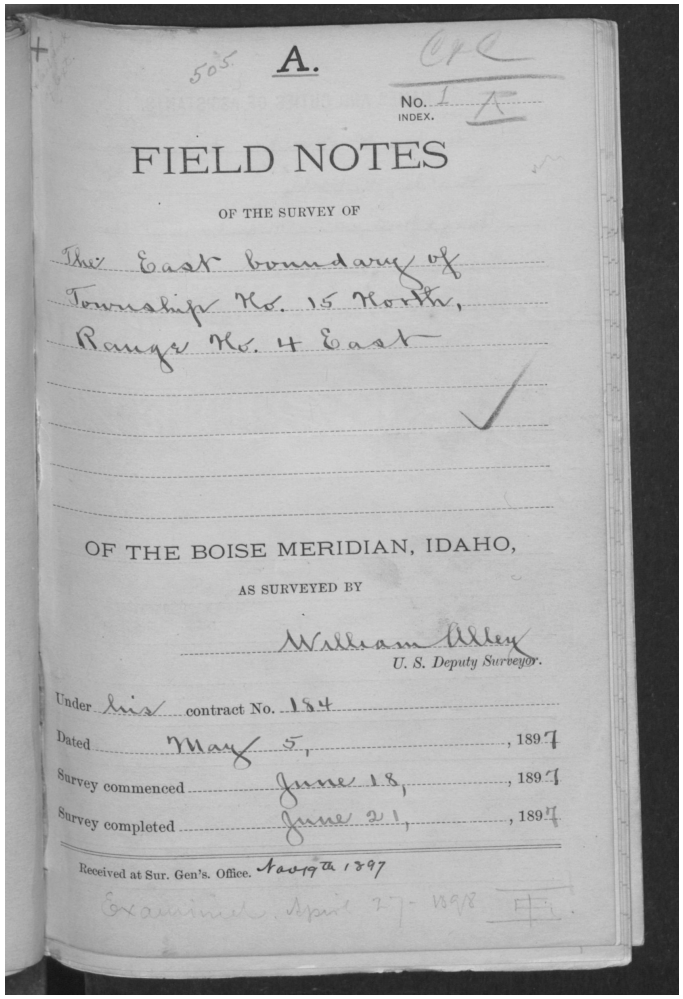

505 A.

No. 1 INDEX.

FIELD NOTES

OF THE SURVEY OF

The East boundary of Township No. 15 North, Range No. 4 East

OF THE BOISE MERIDIAN, IDAHO,

AS SURVEYED BY

William Alley

U. S. Deputy Surveyor.

Under his contract No. 184

Dated May 5, , 1897

Survey commenced June 18, , 1897

Survey completed June 21, , 1897

Received at Sur. Gen's. Office. Nov 19th 1897

Examined April 27- 1898 F[?].


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	505 A. O1C No. I A INDEX. FIELD NOTES OF THE SURVEY OF The East boundary of Township No. 15 North, Range No. 4 East OF THE BOISE MERIDIAN, IDAHO, AS SURVEYED BY William Alley U. S. Deputy Surveyor. Under his contract No. 184 Dated May 5, , 1897 Survey commenced June 18, , 1897 Survey completed June 21, , 1897 Received at Sur. Gen's. Office. Nov 19th 1897 Examined April 27- 1898 F[?].				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

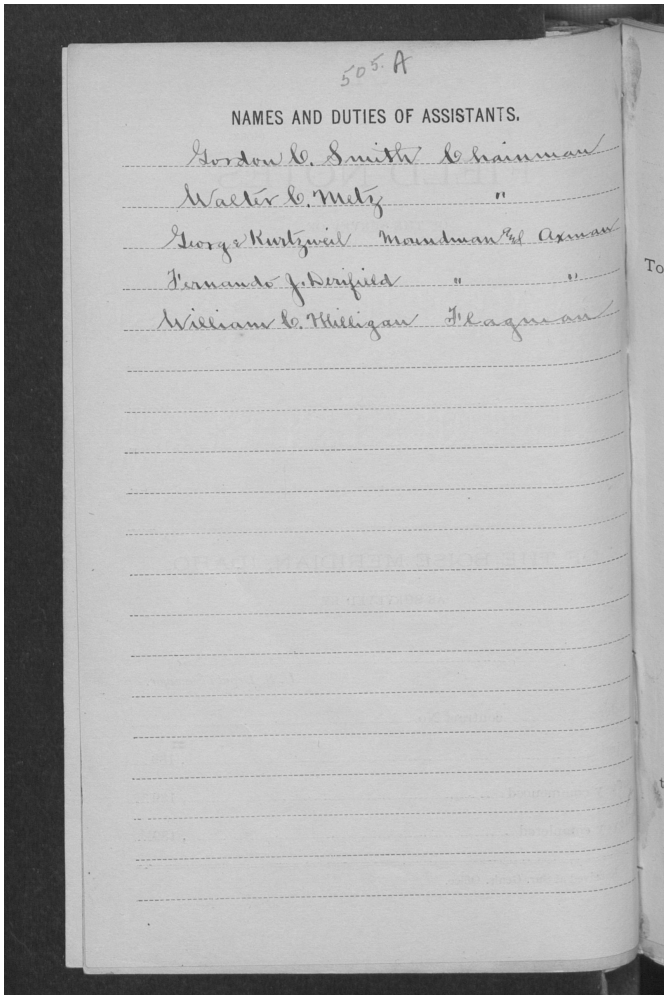


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
2		●	505. A NAMES AND DUTIES OF ASSISTANTS. Gordon C. Smith Chainman Walter C. Metz " George Kurtzwiel Moundman & Axman Fernando J. Drifield " " William C. Milligan Flagman				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

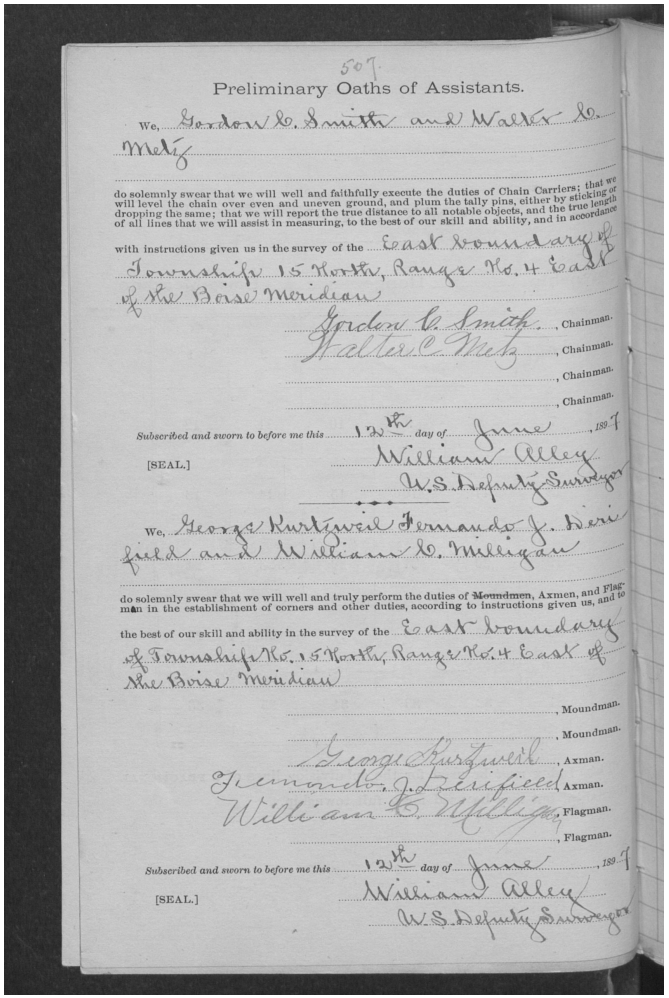

507.

Preliminary Oaths of Assistants.

We, Gordon C. Smith and Walter C. Metz

do solemnly swear that we will well and faithfully execute the duties of Chain Carriers; that we will level the chain over even and uneven ground, and plum the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with instructions given us in the survey of the East boundary of Township 15 North, Range No. 4 East of the Boise Meridian

Gordon C. Smith, Chainman.
Walter C. Metz, Chainman.
, Chainman.
, Chainman.

Subscribed and sworn to before me this 12th day of June, 189[illegible]

[SEAL.] William Alley
U.S. Deputy Surveyor

We, George Kurtzweil Fernando J. Derisfield and William C. Milligan

do solemnly swear that we will well and truly perform the duties of ~~Moundmen~~, Axmen, and Flagman in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability in the survey of the East boundary of Township No. 15 North, Range No. 4 East of the Boise Meridian

, Moundman.
, Moundman.
George Kurtzweil, Axman.
Fernando J. Derisfield, Axman.
William C. Milligan, Flagman.
, Flagman.

Subscribed and sworn to before me this 12th day of June, 189[illegible]

[SEAL.] William Alley
U.S. Deputy Surveyor


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
3		●	507. Preliminary Oaths of Assistants. We, Gordon C. Smith and Walter C. Metz do solemnly swear that we will well and faithfully execute the duties of Chain Carriers; that we will level the chain over even and uneven ground, and plum the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with instructions given us in the survey of the East boundary of Township 15 North, Range No. 4 East of the Boise Meridian Gordon C. Smith , Chainman. Walter C. Metz , Chainman. , Chainman. , Chainman. Subscribed and sworn to before me this 12th day of June , 189[?] [SEAL.] William Alley U.S. Deputy Surveyor We, George Kurtzweil Fernando J. Derisfield and William C. Milligan do solemnly swear that we will well and truly perform the duties of Moundmen, Axmen, and Flagman in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability in the survey of the East boundary of Township No. 15 North, Range No. 4 East of the Boise Meridian , Moundman. , Moundman. George Kurtzweil , Axman. Fernando J. Derisfield Axman. William C. Milligan , Flagman. , Flagman. Subscribed and sworn to before me this 12th day of June , 189[?] [SEAL.] William Alley U.S. Deputy Surveyor				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

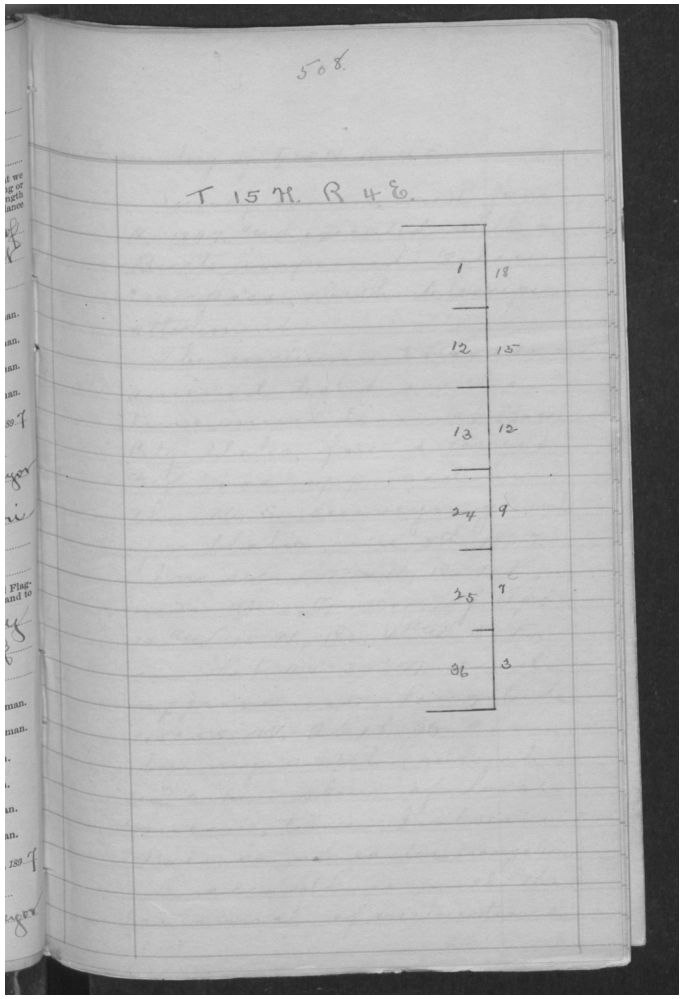


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
4		●	508 T 15 N R 4 E 1 | 18 12 | 15 13 | 12 24 | 9 35 | 7 36 | 3				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

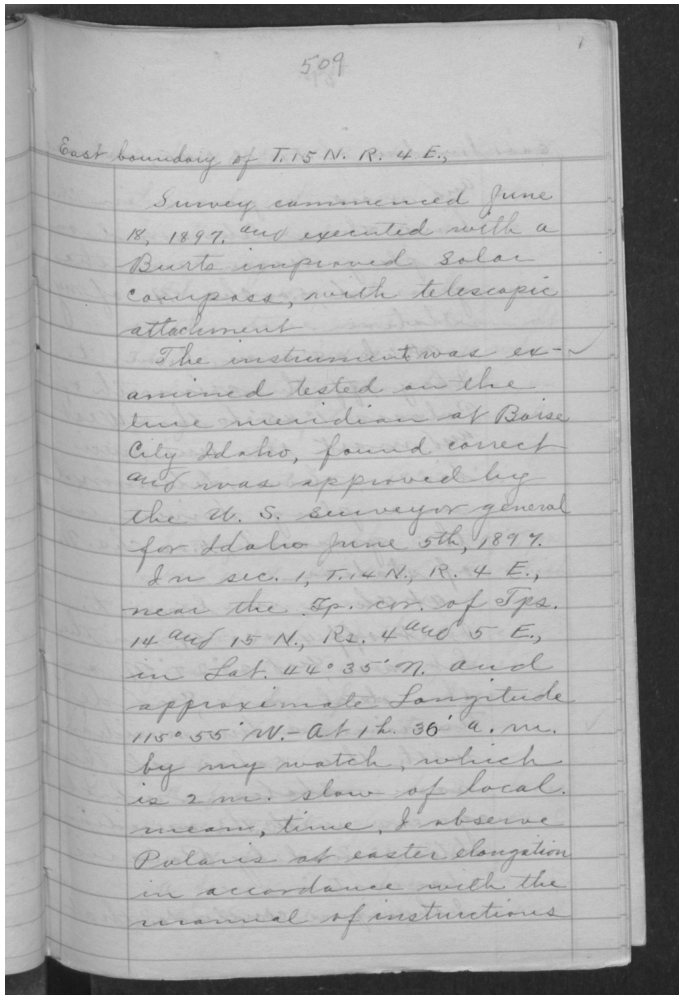


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
5		●	509 East boundary of T.15 N. R. 4 E., Survey commenced June 18, 1897, and executed with a Burts improved Solar compass, with telescopic attachment The instrument was ex- amined tested on the true meridian at Boise City Idaho, found correct and was approved by the U. S. Surveyor general for Idaho June 5th, 1897. In sec. 1, T.14 N., R. 4 E., near the Tp. cor. of Tps. 14 and 15 N., Rs. 4 and 5 E., in Lat. 44°35' N. and approximate Longitude 115°55' W.- At 1 h. 36' a. m. by my watch, which is 2 m. slow of local. mean, time, I observe Polaris at easter elongation in accordance with the manual of instructions				

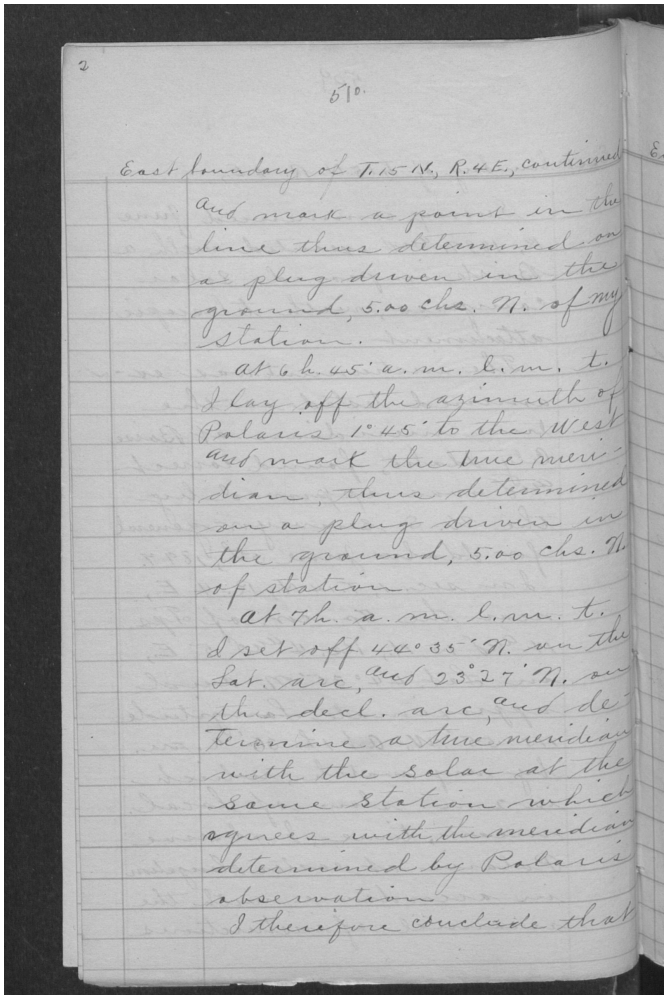


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
6		●	2 510. East boundary of T.15 N., R.4E., continued and mark a point in the line thus determined on a plug driven in the ground, 5.00 chs. N. of my Station. At 6 h. 45' a.m. L.m. t. I lay off the azimuth of Polaris 1°45' to the West and mark the true merid- dian, thus determined on a plug driven in the ground, 5.00 chs. N. of Station At 7h. a.m. L.m. t. I set off 40°35' N. on the Sat. arc, and 23°27' N. on the decl. arc, and de- termine a true meridian with the Solar at the Same Station which agrees with the meridian determined by Polaris observation I therefore conclude that				

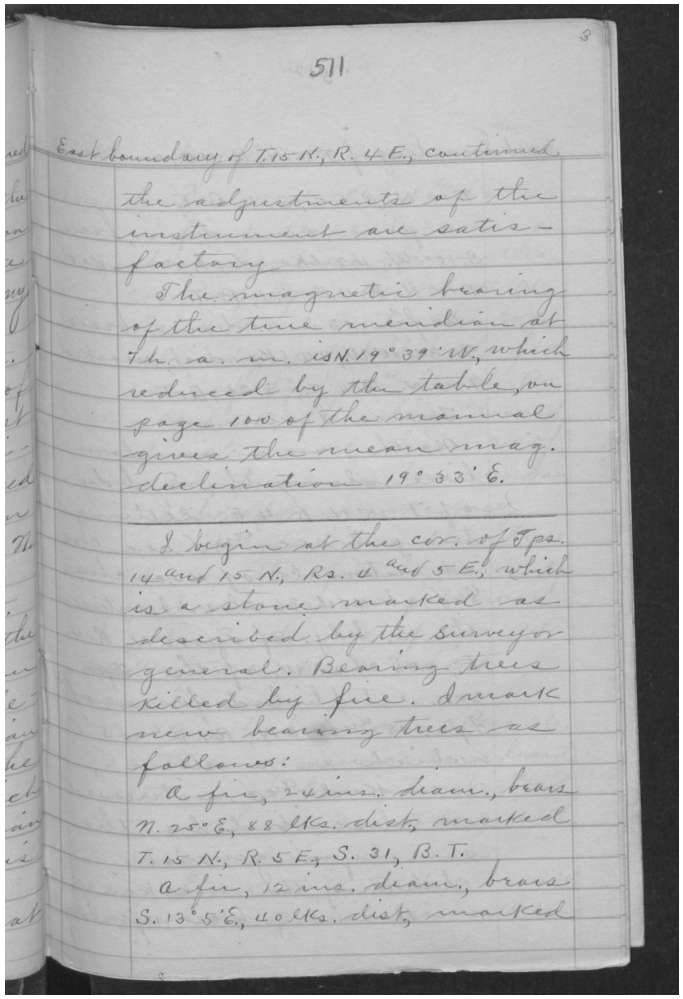


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
7			East boundary of T. 15 N., R. 4 E., continued.				
8			the adjustments of the instrument are satis-factory				
9			The magnetic bearing of the true meridian at 7h. a. m. is N. 19° 39' W., which reduced by the table, on page 100 of the manual gives the mean mag. declination 19° 33' E.				
10		⚠	**I begin at the cor. of Tps. 14 and 15 N., Rs. 4 and 5 E., which is a stone marked as described by the Surveyor general. Bearing trees killed by fire. I mark new bearing trees as follows: a fir, 24 ins. diam., bears N. 25° E., 88 lks. dist, marked T. 15 N., R. 5 E., S. 31, B. T. a fir, 12 ins. diam., bears S. 13° 5' E., 40 lks. dist, marked**				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

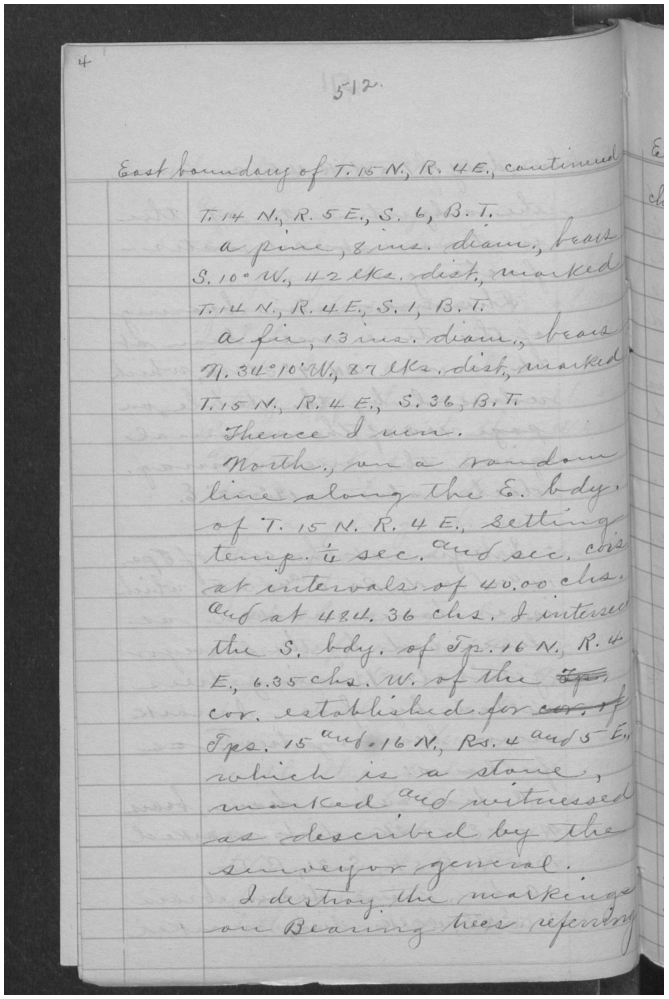

4

512

East boundary of T. 15 N., R. 4E., continued

T. 14 N., R. 5 E., S. 6, B. T.
a pine, 8 ins. diam., bears
S. 10° W., 42 lks. dist., marked
T. 14 N., R. 4 E., S. 1, B. T.
a fir, 13 ins. diam., bears
N. 34° 10' W., 87 lks. dist., marked
T. 15 N., R. 4 E., S. 36, B. T.
Thence I run.
North, on a random
line along the E. bdy.
of T. 15 N. R. 4 E., Setting
temp. ¼ sec. and sec. cors
at intervals of 40.00 chs.
And at 484. 36 chs. I intersec
the S. bdy. of Tp. 16 N., R. 4
E., 6.35 chs. W. of the ~~Tps.~~
cor. established for ~~cors. of~~
Tps. 15 and 16 N., Rs. 4 and 5 E.,
which is a stone,
marked and witnessed
as described by the
surveyor general.
I destroy the markings
on Bearing trees referring


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
11			East boundary of T. 15 N., R. 4E., continued				
12		●	T. 14 N., R. 5 E., S. 6, B. T. a pine, 8 ins. diam., bears S. 10° W., 42 lks. dist., marked T. 14 N., R. 4 E., S. 1, B. T. a fir, 13 ins. diam., bears N. 34° 10' W., 87 lks. dist., marked T. 15 N., R. 4 E., S. 36, B. T. Thence I run. North., on a random line along the E. bdy. of T. 15 N. R. 4 E., Setting temp. ¼ sec. and sec. cors at intervals of 40.00 chs. And at 484. 36 chs. I intersec the S. bdy. of Tp. 16 N., R. 4 E., 6.35 chs. W. of the Tp. cor. established for cor. of Tps. 15 and 16 N., Rs. 4 and 5 E., which is a stone, marked and witnessed as described by the surveyor general. I destroy the markings on Bearing trees referring				

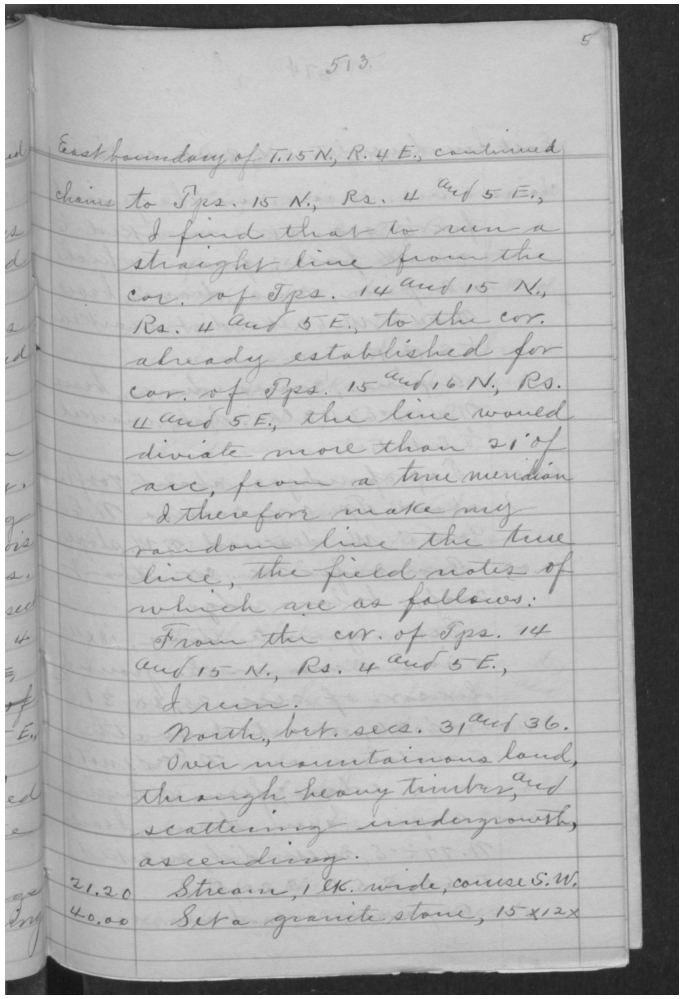


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
13			East boundary of T.15 N., R. 4 E., continued				
14			to Tps. 15 N., Rs. 4 and 5 E., I find that to run a straight line from the cor. of Tps. 14 and 15 N., Rs. 4 and 5 E., to the cor. already established for cor. of Tps. 15 and 16 N., Rs. 4 and 5 E., the line would deviate more than 21' of arc, from a true meridian I therefore make my random line the true line, the field notes of which are as follows: From the cor. of Tps. 14 and 15 N., Rs. 4 and 5 E., I run.				
15			North, bet. secs. 31 and 36. Over mountainous land, through heavy timber, and scattering undergrowth, ascending.				
16	21.20	●	Stream, 1 lk. wide, course S.W.				
17	40.00	△	**Set a granite stone, 15 x 12 x**				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 2 calls without a location

Numbers match the text table; only this scan page is shown.

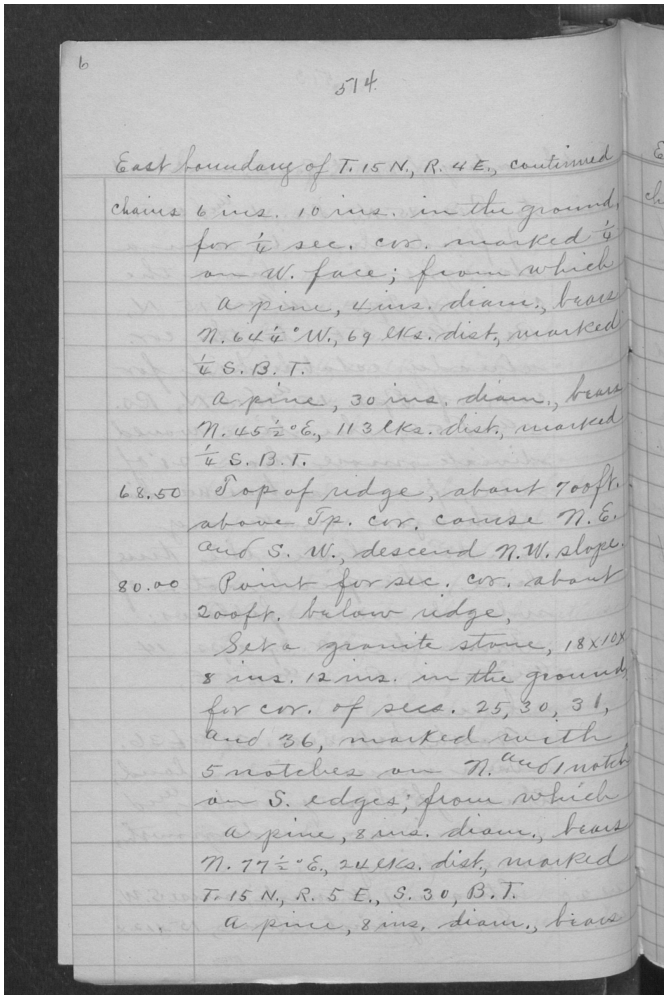

574

East boundary of T. 15 N., R. 4 E., continued

Chains 6 ins. 10 ins. in the ground, for ¼ sec. cor. marked ¼ on W. face; from which a pine, 4 ins. diam., bears N. 64½° W., 69 lks. dist, marked ¼ S. B. T.
a pine, 30 ins. diam., bears N. 45½° E., 113 lks. dist, marked ¼ S. B. T.

68.50 Top of ridge, about 700 ft. above Tp. cor. course N. E. and S. W., descend N. W. slope.


80.00 Point for sec. cor. about 200ft. below ridge,
Set a granite stone, 18x10x 8 ins. 12 ins. in the ground for cor. of secs. 25, 30, 31, and 36, marked with 5 notches on N. and 1 notch on S. edges; from which a pine, 8 ins. diam., bears N. 77½° E., 24 lks. dist., marked T. 15 N., R. 5 E., S. 30, B. T.
a pine, 8 ins. diam., bears

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
18			East boundary of T. 15 N, R. 4 E., continued				
19		△	**6 ins. 10 ins. in the ground, for ¼ sec. cor. marked ¼ on W. face; from which a pine, 4 ins. diam., bears N. 64½° W., 69 lks. dist, marked ¼ S. B. T. a pine, 30 ins. diam., bears N. 45½° E., 113 lks. dist., marked ¼ S. B. T.**				
20	68.50	●	Top of ridge, about 700 ft. above Tp. cor. course N. E. and S. W., descend N. W. slope.				
21	80.00	▲	**Cor. Secs. 25-30-31-36 · Point for sec. cor. about 200 ft. below ridge, Set a granite stone, 18x10x 8 ins. 12 ins. in the ground, for cor. of secs. 25, 30, 31, and 36, marked with 5 notches on N. and 1 notch on S. edges; from which a pine, 8 ins. diam., bears N. 77½° E., 24 lks. dist., marked T. 15 N., R. 5 E., S. 30, B. T. a pine, 8 ins. diam., bears**				100200

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 3 calls without a location
Numbers match the text table; only this scan page is shown.

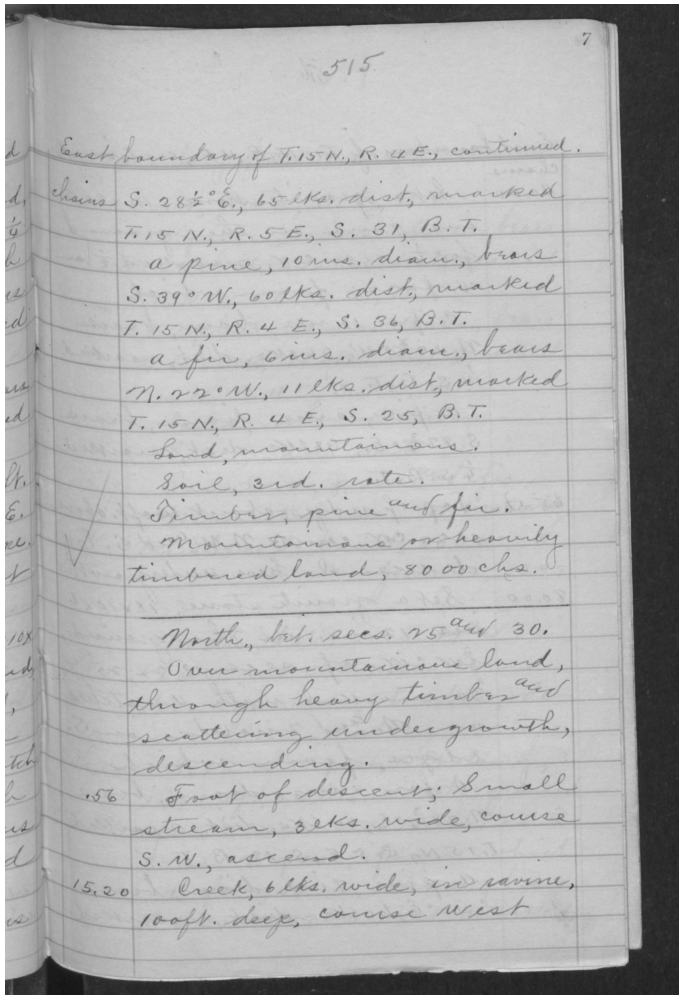

515

East boundary of T.15N., R. 4E., continued.

Chains S. 28½°E., 65 lks. dist, marked T. 15 N., R. 5 E., S. 31, B.T. a pine, 10 ins. diam, bears S. 39°W., 60 lks. dist, marked T. 15 N., R. 4 E., S. 36, B.T. a fir, 6 ins. diam., bears N. 22°W., 11 lks. dist., marked T. 15 N., R. 4 E., S. 25, B.T.

Land, mountainous.

Soil, 3rd. rate.

Timber, pine and fir.

Mountainous or heavily timbered land, 80 00 chs.

North, bet. secs. 25 and 30.

Over mountainous land, through heavy timber and scattering undergrowth, descending.

.56 Foot of descent; Small stream, 3 lks. wide, course S.W., ascend.

15.20 Creek, 6 lks. wide, in ravine, 100 ft. deep, course west

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
22			East boundary of T.15N., R. 4E., continued.				
23		●	S. 28½°E., 65 lks. dist., marked T.15 N., R. 5E., S. 31, B.T. a pine, 10 ins. diam., bears S. 39°W., 60 lks. dist., marked T. 15 N., R. 4 E., S. 36, B.T. a fir, 6 ins. diam., bears N. 22°W., 11 lks. dist., marked T. 15 N., R. 4 E., S. 25, B.T.				
24		●	Land, mountainous.				
25		●	Soil, 3rd. rate.				
26		●	Timber, pine and fir.				
27	80.00	●	Mountainous or heavily timbered land, 80 00 chs.				
28			North, bet. secs. 25 and 30.				
29		●	Over mountainous land, through heavy timber and scattering undergrowth, descending.				
30	0.56	●	Small stream, 3 lks. wide, course S.W. · Foot of descent; Small stream, 3 lks. wide, course S.W., ascend.				
31	15.20	●	Creek, 6 lks. wide, in ravine, 100 ft. deep, course west				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 8 calls without a location

Numbers match the text table; only this scan page is shown.

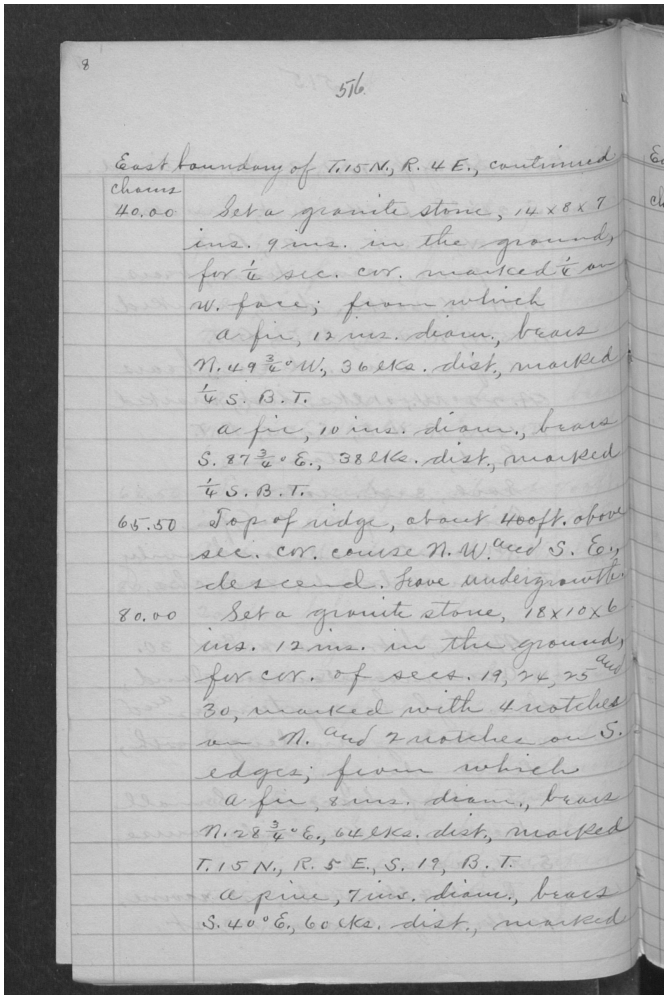

576

East boundary of T.15N., R. 4E., continued

Chains

40.00 Set a granite stone, 14×8×7 ins. 9 ins. in the ground, for ¼ sec. cor. marked ¼ on W. face; from which a fir, 12 ins. diam., bears N. 49¾°W, 36 lks. dist., marked ¼ S. B.T. a fir, 10 ins. diam., bears S. 87¾°E., 38 lks. dist., marked ¼ S. B.T.

65.50 Top of ridge, about 400ft. above sec. cor. course N.W. and S.E., descend. Have undergrowth.

80.00 Set a granite stone, 18×10×6 ins. 12 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, marked with 4 notches on N. and 2 notches on S. edges; from which a fir, 8 ins. diam., bears N. 28¾°E, 64 lks. dist., marked T.15N., R. 5E., S. 19, B.T. a pine, 7 ins. diam., bears S. 40°E, 60 lks. dist., marked


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 3 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
32			East boundary of T.15N, R. 4E., continued				
33			chains				
34	40.00	△	**100250 · Set a granite stone, 14x8x7 ins. 9 ins. in the ground, for ¼ sec. cor. marked ¼ on W. face; from which a fir, 12 ins. diam., bears N. 49¾°W, 36 lks. dist., marked ¼ S. B.T. a fir, 10 ins. diam., bears S. 87¾°E., 38 lks. dist., marked ¼ S. B.T.**				100240
35	65.50	●	Top of ridge, about 400ft. above sec. cor. course N.W. and S.E., descend. Have undergrowth				
36	80.00	▲	**Cor. Secs. 25-36 · Set a granite stone, 18x10x6 ins. 12 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, marked with 4 notches on N. and 2 notches on S. edges; from which a fir, 8 ins. diam., bears N. 28¾°E, 64 lks. dist., marked T.15N., R. 5E., S. 19, B.T. a pine, 7 ins. diam., bears S. 40°E, 60 lks. dist., marked**				700200

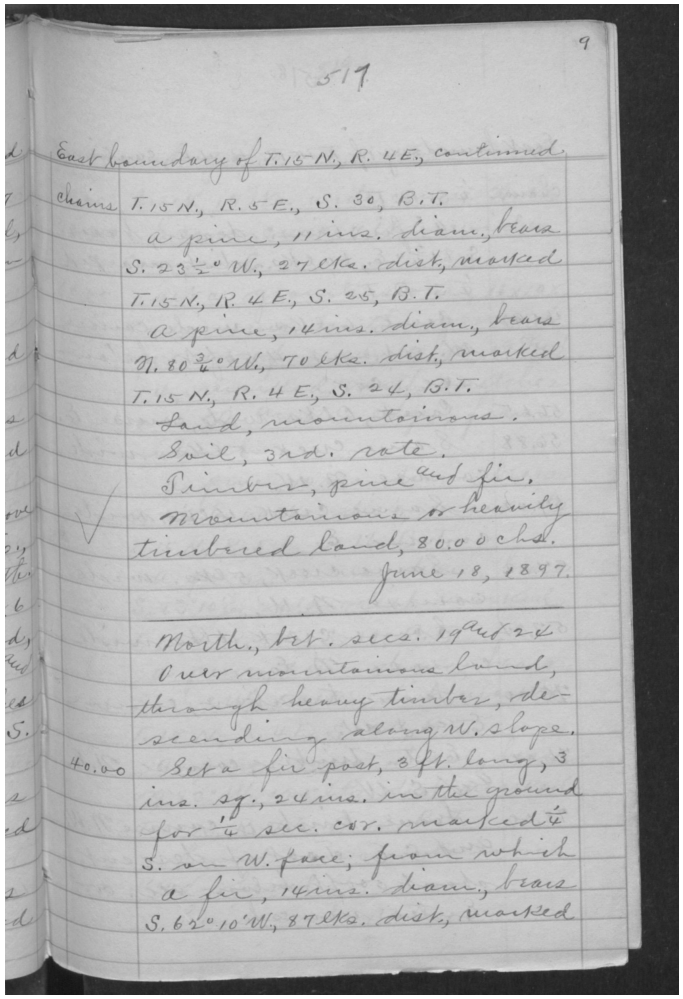

517

East boundary of T.15 N., R. 4E., continued.

chains T.15 N., R. 5 E., S. 30, B.T.
a pine, 11 ins. diam., bears
S. 23½° W., 27 lks. dist., marked
T.15 N., R. 4 E., S. 25, B.T.
a pine, 14 ins. diam., bears
N. 80¾° W., 70 lks. dist., marked
T. 15 N., R. 4 E., S. 24, B.T.
Land, mountainous.
Soil, 3rd. rate.
Timber, pine and fir.
Mountainous or heavily
timbered land, 80.00 chs.
June 18, 1897.


North., bet. secs. 19 and 24
Over mountainous land,
through heavy timber, de-
scending along W. slope.
40.00 Set a fir post, 3 ft. long, 3
ins. sq., 24 ins. in the ground
for ¼ sec. cor. marked ¼
S. on W. face; from which
a fir, 14 ins. diam., bears
S. 62° 10' W., 87 lks. dist., marked

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
37			East boundary of T.15N, R. 4E, continued.				
38		●	T.15N., R. 5E., S. 30, B.T. a pine, 11 ins. diam, bears S. 23½° W., 27 cks. dist, marked T.15N, R. 4E., S. 25, B.T. a pine, 14ins. diam, bears N. 80¾° W., 70 cks. dist, marked T.15N., R. 4E., S. 24, B.T. Land, mountainous. Soil, 3rd. rate. Timber, pine and fir. Mountainous or heavily timbered land, 80.00 chs. June 18, 1897.				
39			North., bet. secs. 19 & 24				
40		●	Over mountainous land, through heavy timber, descending along W. slope.				
41	40.00	△	**100350 · Set a fir post, 3 ft. long, 3 ins. sq., 24 ins. in the ground for ¼ sec. cor. marked ¼ S. on W. face; from which a fir, 14 ins. diam, bears S. 62° 10' W., 87 lks. dist, marked**				100340

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 3 calls without a location
Numbers match the text table; only this scan page is shown.

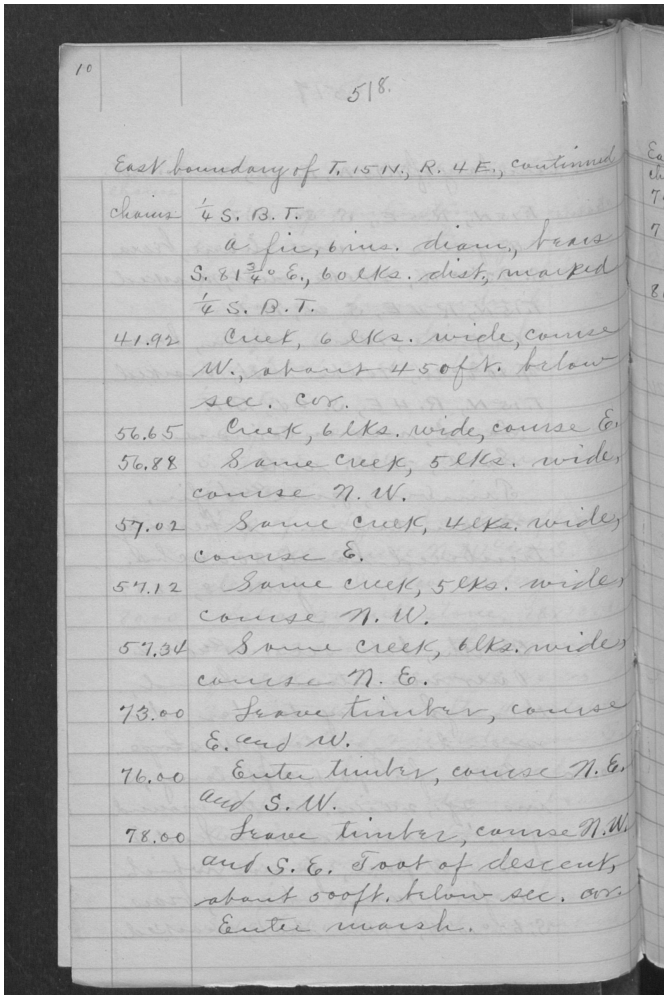

518.

East boundary of T. 15 N., R. 4 E., continued

Chains

4 S. B. T.
a fir, 6 ins. diam., bears
S. 81 3/4° E., 60 lks. dist., marked
4 S. B. T.

41.92 Creek, 6 lks. wide, course
W., about 45 ft. below
sec. cor.

56.65 Creek, 6 lks. wide, course E.

56.88 Same creek, 5 lks. wide,
course N. W.

57.02 Same creek, 4 lks. wide,
course E.

57.12 Same creek, 5 lks. wide,
course N. W.

57.34 Same creek, 6 lks. wide,
course N. E.

73.00 Leave timber, course
E. and W.

76.00 Enter timber, course N. E.
and S. W.


78.00 Leave timber, course N. W.
and S. E. Foot of descent,
about 500 ft. below sec. cor.
Enter marsh.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
42			East boundary of T. 15 N., R. 4 E., continued				
43		●	4 S. B. T. a fir, 6 ins. diam., bears S. 81 3/4° E., 60 lks. dist., marked 4 S. B. T.				
44	41.92	△	**100352 · Creek, 6 lks. wide, course N., about 45 ft. below sec. cor.**				100352
45	56.65	●	Creek, 6 lks. wide, course E.				
46	56.88	●	Same creek, 5 lks. wide, course N. W.				
47	57.02	●	Same creek, 4 lks. wide, course E.				
48	57.12	●	Same creek, 5 lks. wide, course N. W.				
49	57.30	●	Same creek, 6 lks. wide, course N. E.				
50	73.00	●	Leave timber, course E. and W.				
51	76.00	●	Enter timber, course N. E. and S. W.				
52	78.00	▲	**100398 · Leave timber, course N. W. and S. E. Foot of descent, about 500 ft. below sec. cor. Enter marsh.**				100398

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 10 calls without a location
Numbers match the text table; only this scan page is shown.

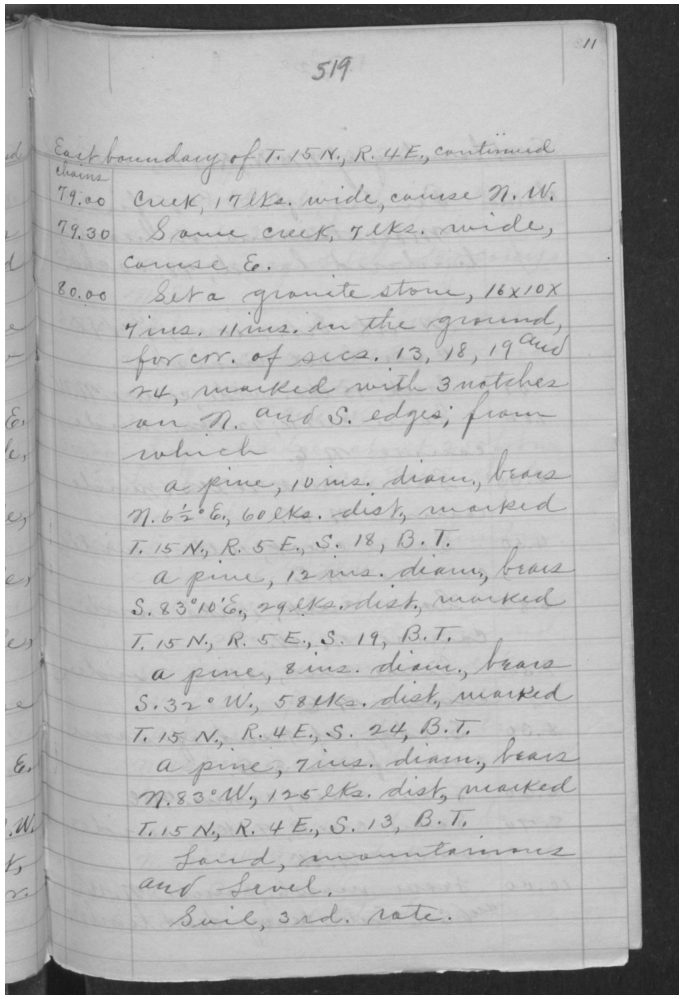

519

East boundary of T. 15 N., R. 4E., continued

Chains	
79.00	Creek, 17 lks. wide, course N. W.
79.30	Same creek, 7 lks. wide, course E.
80.00	Set a granite stone, 16x10x 7 ins. 11 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, marked with 3 notches on N. and S. edges; from which a pine, 10 ins. diam., bears N. 6½° E., 60 lks. dist., marked T. 15 N., R. 5 E., S. 18, B.T. a pine, 12 ins. diam., bears S. 83°10'E., 29 lks. dist., marked T. 15 N., R. 5 E., S. 19, B.T. a pine, 8 ins. diam., bears S. 32° W., 58 lks. dist., marked T. 15 N., R. 4E., S. 24, B.T. a pine, 7 ins. diam., bears N. 83° W., 125 lks. dist., marked T. 15 N., R. 4 E., S. 13, B.T. Land, mountainous and level. Soil, 3rd. rate.


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
53			East boundary of T. 15 N., R. 4E., continued				
54	79.00		Creek, 17 lks. wide, course N. W.				
55	79.30		Same creek, 7 lks. wide, course E.				
56	80.00		**Cor. Secs. 13-24 · Set a granite stone, 16x10x 7 ins. 11 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, marked with 3 notches on N. and S. edges; from which a pine, 10 ins. diam., bears N. 6½° E., 60 lks. dist., marked T. 15 N., R. 5 E., S. 18, B.T. a pine, 12 ins. diam., bears S. 83°10'E., 29 lks. dist., marked T. 15 N., R. 5 E., S. 19, B.T. a pine, 8 ins. diam., bears S. 32° W., 58 lks. dist., marked T. 15 N., R. 4E., S. 24, B.T. a pine, 7 ins. diam., bears N. 83° W., 125 lks. dist., marked T. 15 N., R. 4 E., S. 13, B.T. Land, mountainous and level. Soil, 3rd. rate.**				700400

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 3 calls without a location

Numbers match the text table; only this scan page is shown.

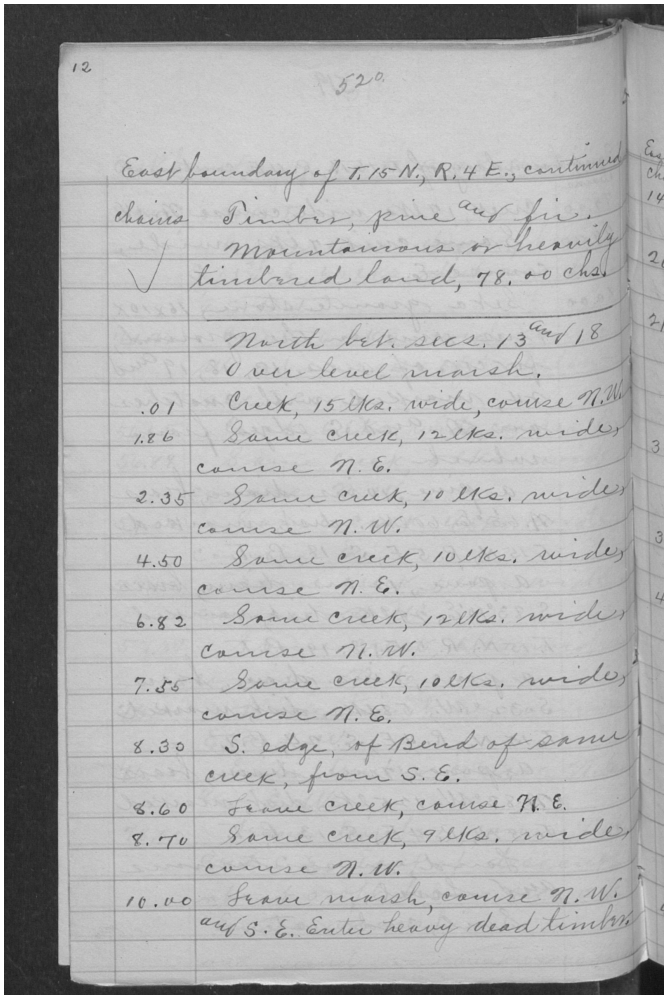


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
57			East boundary of T. 15 N., R. 4 E., continued.				
58		●	Timber, pine and fir. Mountainous or heavily timbered land, 78.00 chs.				
59			North bet. secs. 13 and 18				
60		●	Over level marsh.				
61	0.01	●	Creek, 15 lks. wide, course N.W.				
62	1.86	●	Same creek, 12 lks. wide, course N.E.				
63	2.35	●	Same creek, 10 lks. wide, course N.W.				
64	4.50	●	Same creek, 10 lks. wide, course N.E.				
65	6.82	●	Same creek, 12 lks. wide, course N.W.				
66	7.55	●	Same creek, 10 lks. wide, course N.E.				
67	8.30	●	S. edge, of Bend of same creek, from S.E.				
68	8.60	●	Same creek, course N.E.				
69	8.70	●	Same creek, 9 lks. wide, course N.W.				
70	10.00	●	Same marsh, course N.W. and S.E. · Same marsh, course N.W. and S.E. Enter heavy dead timb[er]				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 12 calls without a location

Numbers match the text table; only this scan page is shown.

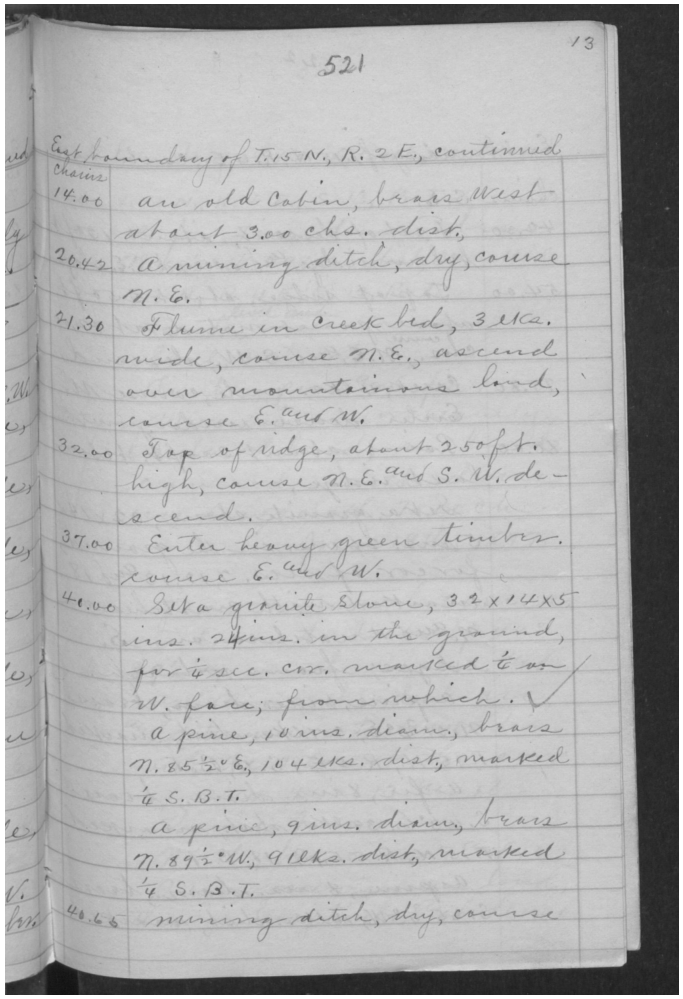


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
71			East boundary of T.15 N., R. 2 E., continued				
72	14.00	●	an old Cabin, bears West about 3.00 chs. dist,				
73	20.42	●	a mining ditch, dry, course N. E.				
74	21.30	●	Flume in creek bed, 3 lks. wide, course N.E. · Flume in creek bed, 3 lks. wide, course N.E., ascend over mountainous land, course E. and N.				
75	32.00	●	Top of ridge, about 250ft. high, course N.E. and S.W. descend.				
76	37.00	●	Enter heavy green timber. course E. and W.				
77	40.00	△	**100450 · Set a granite stone, 32 x 14 x 5 ins. 24ins. in the ground, for ¼ sec. cor. marked t on N. face; from which. a pine, 10 ins. diam, bears N. 85½° E, 104 lks. dist, marked t4 S.B.T. a pine, 9 ins. diam, bears N. 89½° W, 91 lks. dist, marked t4 S.B.T.**				100440
78	40.65	●	mining ditch, dry, course				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 7 calls without a location

Numbers match the text table; only this scan page is shown.

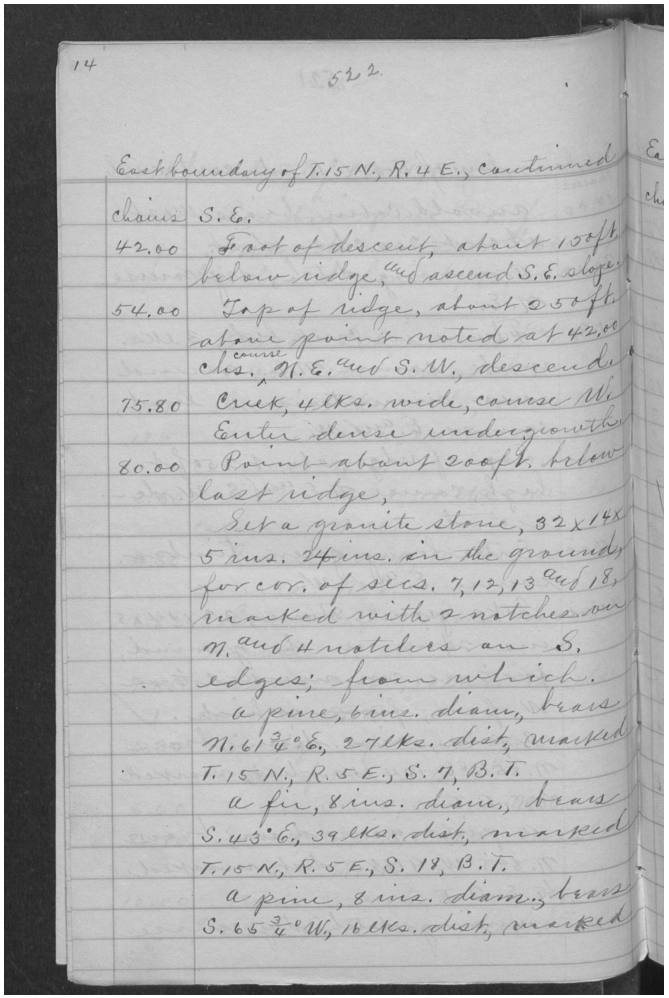

14

522.

East boundary of T. 15 N., R. 4 E., continued

Chains	
	S. E.
42.00	Foot of descent, about 100ft. below ridge, and ascend S.E. slope.
54.00	Top of ridge, about 250ft. above point noted at 42.00 chs., course N.E. and S.W., descend.
75.80	Creek, 4 lks. wide, course N. Creek, 4 lks. wide, course N. Enter dense undergrowth.
80.00	Point about 200ft. below last ridge, Set a granite stone, 32x14x 5 ins. 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, marked with 2 notches on N. and 4 notches on S. edges; from which. a pine, 6 ins. diam., bears N. 61 3/4° E., 27 lks. dist., marked T. 15 N., R. 5 E., S. 7, B. T. a fir, 8 ins. diam., bears S. 43° E., 39 lks. dist., marked T. 15 N., R. 5 E., S. 18, B. T. a pine, 8 ins. diam., bears S. 65 3/4° W., 16 lks. dist., marked


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
79			East boundary of T.15 N., R. 4 E., continued				
80			S.E.				
81	42.00	●	Foot of descent, about 100ft. below ridge, and ascend S.E. slope.				
82	54.00	●	Top of ridge, about 250ft. above point noted at 42.00 chs., course N.E. and S.W., descend.				
83	75.80	●	Creek, 4 lks. wide, course N. · Creek, 4 lks. wide, course N. Enter dense undergrowth.				
84	80.00	▲	**Cor. Secs. 12-13 · Point about 200ft. below last ridge, Set a granite stone, 32x14x 5 ins. 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, marked with 2 notches on N. and 4 notches on S. edges; from which. a pine, 6 ins. diam., bears N.61 3/4°E., 27 lks. dist., marked T.15 N., R.5 E., S. 7, B.T. a fir, 8 ins. diam., bears S.43°E., 39 lks. dist., marked T.15 N., R.5 E., S. 18, B.T. a pine, 8 ins. diam., bears S.65 3/4°W., 16 lks. dist., marked**				700500

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 4 calls without a location

Numbers match the text table; only this scan page is shown.

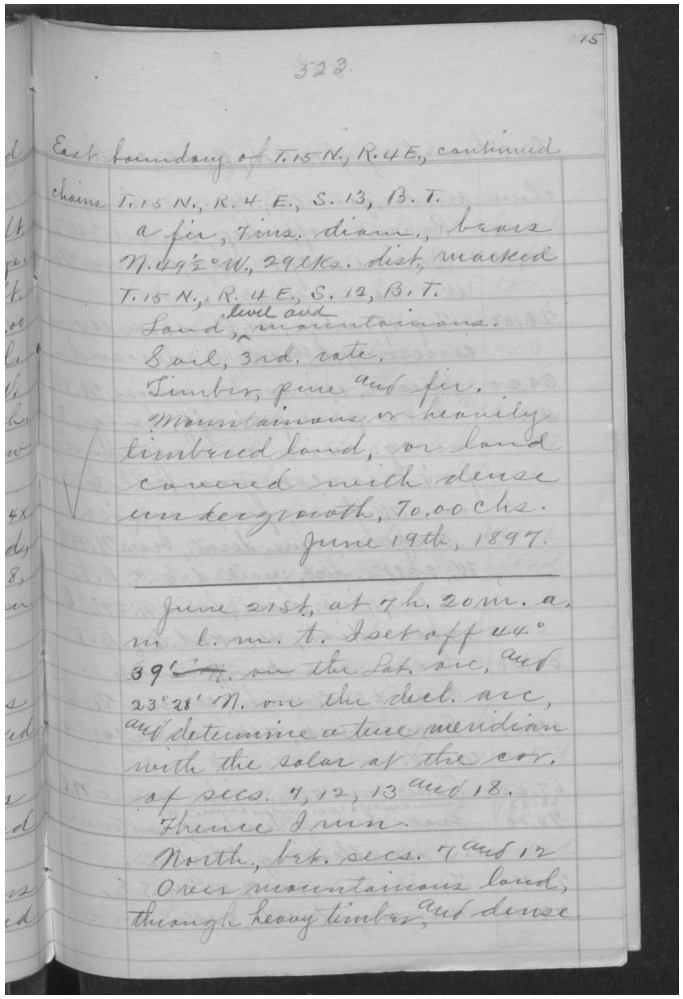

323.

East boundary of T.15 N., R.4E., continued

chains T.15 N., R. 4 E., S. 13, B. T.
a fir, 7 ins. diam., bears
N. 49½° W., 29 lks. dist, marked
T.15 N., R. 4 E., S. 12, B.T.
Land, level and mountainous.
Soil, 3rd. rate.
Timber, pine and fir.
Mountainous or heavily
timbered land, or land
covered with dense
undergrowth, 70.00 chs.
June 19th, 1897.


June 21st, at 7h. 20m. a.
m. l.m. t. I set off 44°
39'~~N.~~ on the lat. arc, and
23°28' N. on the decl. arc,
and determine a true meridian
with the solar at the cor.
of secs. 7, 12, 13 and 18.
Thence I run.
North, bet. secs. 7 and 12
Over mountainous land,
through heavy timber, and dense

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
85			East boundary of T.15 N., R.4E., continued				
86		●	T.15 N., R. 4 E., S. 13, B. T. a fir, 7 ins. diam., bears N. 49½° W., 29 lks. dist., marked T.15 N., R. 4 E., S. 12, B.T. Land, level and mountainous. Soil, 3rd. rate. Timber, pine and fir. Mountainous or heavily timbered land, or land covered with dense undergrowth, 70.00 chs.				
87			June 19th, 1897.				
88		▲	**Cor. Secs. 7-12-13-18 · June 21st, at 7h. 20m. a. m L.m. t. I set off 44° 39[?] on the lat. arc, and 23°28' N. on the decl. arc, and determine a true meridian with the solar at the cor. of secs. 7, 12, 13 and 18. Thence I run.**				100500
89			North, bet. secs. 7 and 12 Over mountainous land, through heavy timber, and dense				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 2 calls without a location
Numbers match the text table; only this scan page is shown.

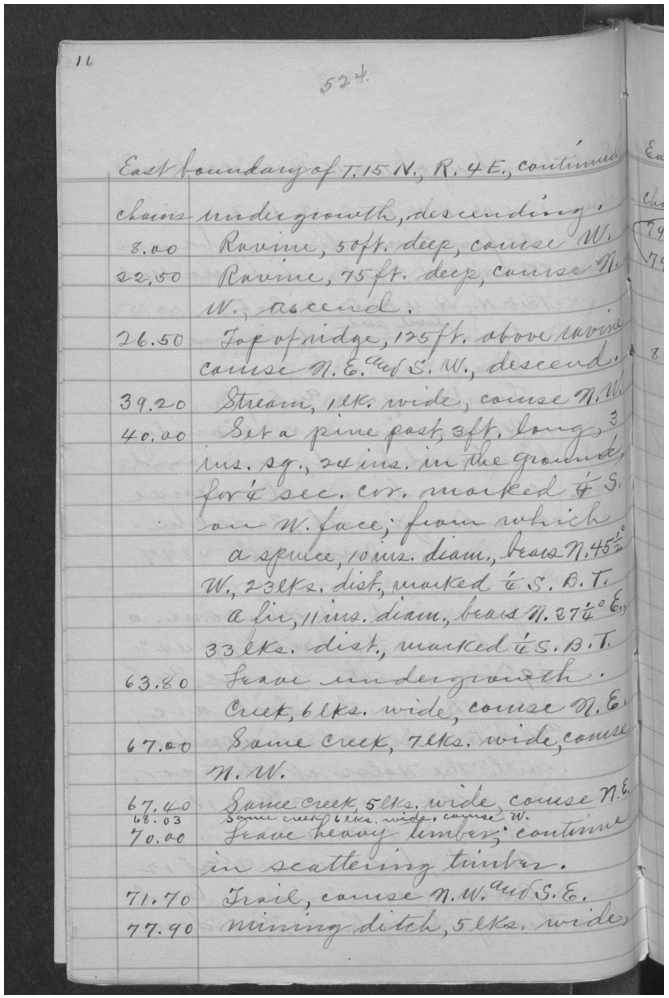

524.

East boundary of T. 15 N., R. 4 E., continued

chains undergrowth, descending.

8.00 Ravine, 50ft. deep, course W.

22.50 Ravine, 75ft. deep, course N. W., ascend.

26.50 Top of ridge, 175ft. above ravine course N.E. and S.W., descend.

39.20 Stream, 1lk. wide, course N.W.

40.00 Set a pine post, 3ft. long, 3 ins. sq., 24 ins. in the ground, for ¼ sec. cor. marked ¼ S. on W. face; from which a spruce, 10 ins. diam., bears N. 45° W., 23 lks. dist., marked t S. B. T. a fir, 11 ins. diam., bears N. 37½° E., 33 lks. dist., marked t S. B. T.

63.80 Leave undergrowth. Creek, 6 lks. wide, course N.E.

67.00 Same creek, 7 lks. wide, course N.W.

67.40 Same creek, 5 lks. wide, course N.E.

68.03 Same creek, 6 lks. wide, course W.

70.00 Leave heavy timber; continue in scattering timber.

71.70 Trail, course N.W. and S.E.

77.90 Mining ditch, 5 lks. wide


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
90			East boundary of T. 15 N., R. 4 E., continued				
91			chains undergrowth, descending.				
92	8.00		Ravine, 50ft. deep, course W.				
93	22.50		Ravine, 75ft. deep, course N. W., ascend.				
94	26.50		Top of ridge, 175ft. above ravine course N.E. and S.W., descend.				
95	39.20		Stream, 1lk. wide, course N.W.				
96	40.00		**Set a pine post, 3ft. long, 3 ins. sq., 24 ins. in the ground, for ¼ sec. cor. marked ¼ S. on W. face; from which a spruce, 10 ins. diam., bears N. 45° W., 23 lks. dist., marked t S. B. T. a fir, 11 ins. diam., bears N. 37½° E., 33 lks. dist., marked t S. B. T.**				
97	63.80		Creek, 6 lks. wide, course N.E. · Leave undergrowth. Creek, 6 lks. wide, course N.E.				
98	67.00		Same creek, 7 lks. wide, course N.W.				
99	67.40		Same creek, 5 lks. wide, course N.E.				
100	68.03		Same creek, 6 lks. wide, course W.				
101	70.00		Leave heavy timber; continue in scattering timber.				
102	71.70		Trail, course N.W. and S.E.				
103	77.90		Mining ditch, 5 lks. wide				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 13 calls without a location

Numbers match the text table; only this scan page is shown.

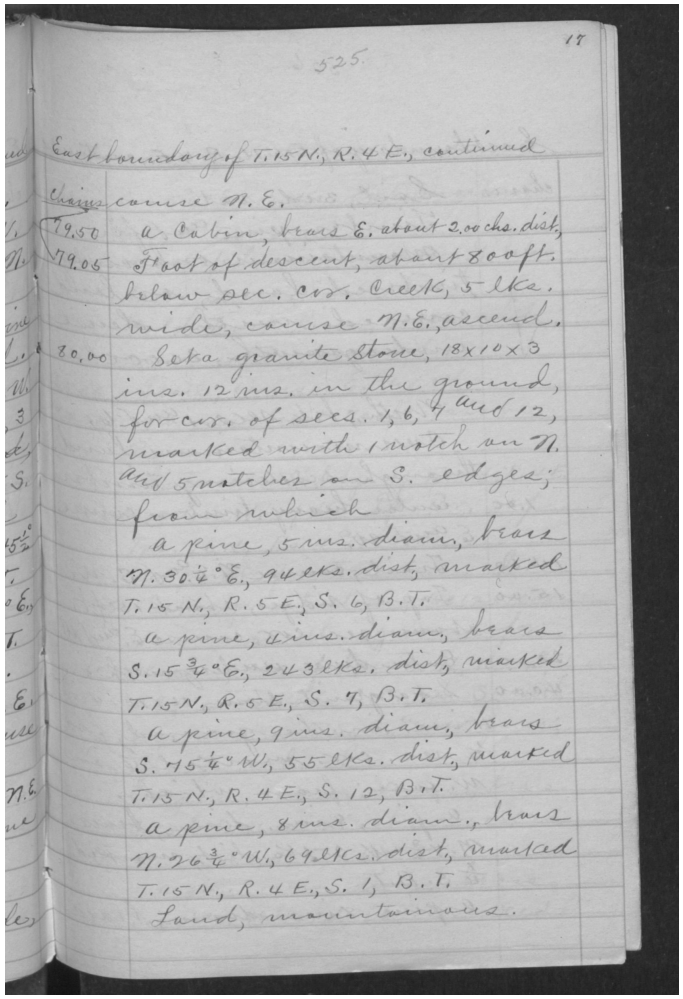

525. 17

East boundary of T.15N., R.4E., continued

course N.E.

79.50 a Cabin, bears E. about 2.00 chs. dist.

79.05 Foot of descent, about 800 ft. below sec. cor. Creek, 5 lks. wide, course N.E., ascend.

80.00 Set a granite stone, 18x10x3 ins. 12 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, marked with 1 notch on N. and 5 notches on S. edges; from which a pine, 5 ins. diam., bears N. 30¾°E., 94 lks. dist., marked T.15 N., R.5 E., S. 6, B.T. a pine, 4 ins. diam., bears S. 15¾°E., 243 lks. dist., marked T.15 N., R.5 E., S. 7, B.T. a pine, 9 ins. diam., bears S. 45¾°W., 55 lks. dist., marked T.15 N., R.4 E., S. 12, B.T. a pine, 8 ins. diam., bears N. 26¾°W., 69 lks. dist., marked T.15 N., R.4 E., S. 1, B.T. Land, mountainous.


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
104			East boundary of T.15N, R.4E., continued				
105			course N.E.				
106	79.50	●	a Cabin, bears E. about 2.00 chs. dist.				
107	79.05	▲	**Cor. Secs. 1-12 · Foot of descent, about 800 ft. below sec. cor. Creek, 5 lks. wide, course N.E., ascend.**				
108	80.00	▲	**Cor. Secs. 1-12 · Set a granite stone, 18x10x3 ins. 12 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, marked with 1 notch on N. and 5 notches on S. edges; from which a pine, 5 ins. diam., bears N. 30¾°E., 94 lks. dist., marked T.15 N., R.5 E., S. 6, B.T. a pine, 4 ins. diam., bears S. 15¾°E., 243 lks. dist., marked T.15 N., R.5 E., S. 7, B.T. a pine, 9 ins. diam., bears S. 45¾°W., 55 lks. dist., marked T.15 N., R.4 E., S. 12, B.T. a pine, 8 ins. diam., bears N. 26¾°W., 69 lks. dist., marked T.15 N., R.4 E., S. 1, B.T. Land, mountainous.**				700600

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 3 calls without a location

Numbers match the text table; only this scan page is shown.

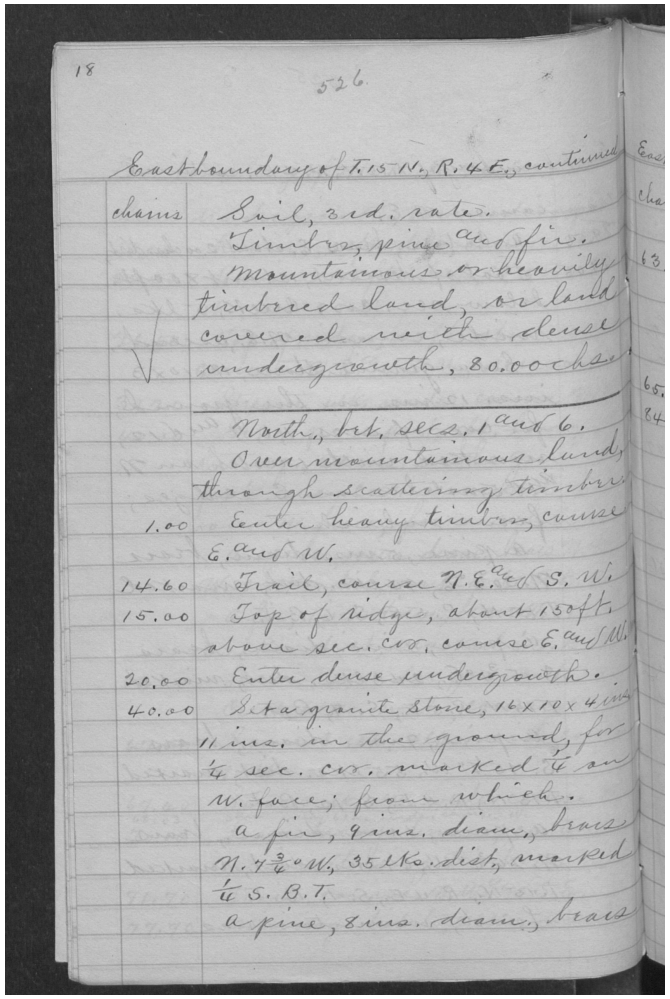


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
109			East boundary of T.15 N., R. 4 E., continued				
110		●	Soil, 3rd. rate. Timber, pine and fir. mountainous or heavily timbered land, or land covered with dense undergrowth, 80.00 chs.				
111			North, bet. Secs. 1 and 6.				
112		●	Over mountainous land, through scattering timber.				
113	1.00	●	Enter heavy timber, course E. and W.				
114	14.60	■	Trail, course N.E. and S.W.				
115	15.00	○	**Top of ridge, about 150 ft. above sec. cor. course E. and W.**				
116	20.00	●	Enter dense undergrowth.				
117	40.00	△	**Set a granite stone, 16 x 10 x 4 ins. 11 ins. in the ground, for ¼ sec. cor. marked ¼ on W. face; from which. a fir, 9 ins. diam., bears N. 7¾° W., 35 lks. dist., marked ¼ S.B.T. a pine, 8 ins. diam., bears**				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 7 calls without a location

Numbers match the text table; only this scan page is shown.

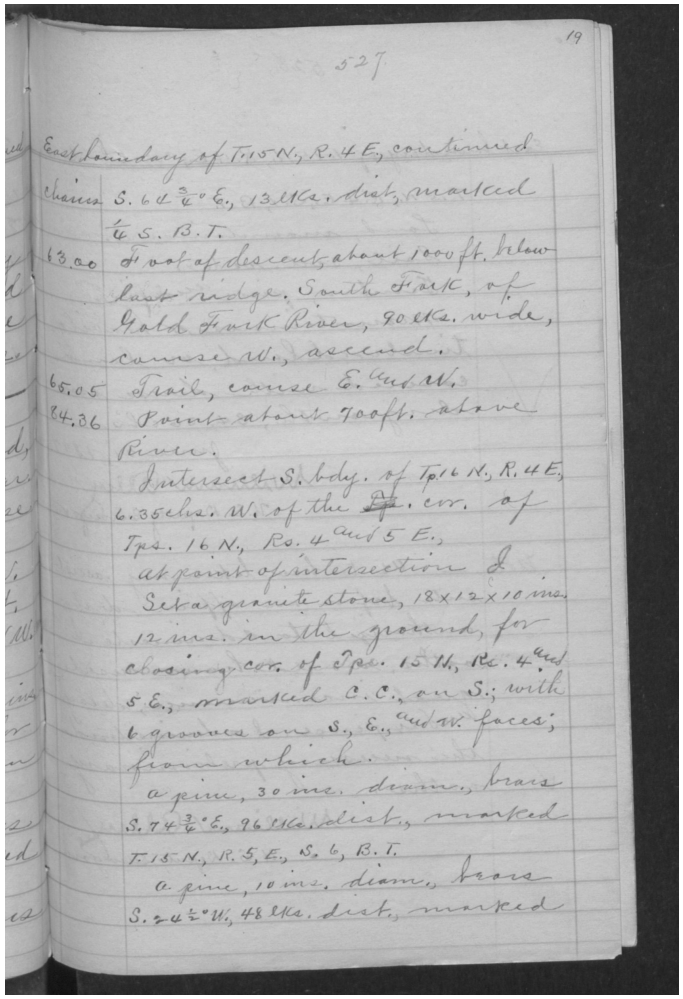

527

19

East boundary of T. 15 N., R. 4 E., continued

Chains S. 64¾° E., 13 lks. dist., marked t S. B.T.

63.00 Foot of descent, about 1000 ft. below last ridge. South Fork, of Gold Fork River, 90 lks. wide, course W., ascend.

65.05 Trail, course E. and W.

74.36 Point about 700 ft. above River.

Intersect S. bdy. of Tp 16 N., R. 4 E., 6.35 chs. W. of the ¼. cor. of Tps. 16 N., Rs. 4 and 5 E., at point of intersection I Set a granite stone, 18 x 12 x 10 ins. 12 ins. in the ground, for closing cor. of Tps. 15 N., Rs. 4 and 5 E., marked C.C., on S.; with 6 grooves on S., E., and W. faces; from which a pine, 30 ins. diam., bears S. 74¾° E., 96 lks. dist., marked T. 15 N., R. 5, E., S. 6, B.T. a pine, 10 ins. diam., bears S. 74½° W., 48 lks. dist., marked


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
11 0			East boundary of T.15 N., R. 4 E., continued				
11 0		●	S. 64¾° E., 13 lks. dist., marked t S. B.T.				
12 0	63.00	◉	South Fork, of Gold Fork River, 90 lks. wide, course W. · Foot of descent, about 1000 ft. below last ridge. South Fork, of Gold Fork River, 90 lks. wide, course W., ascend.				
12 1	65.05	■	Trail, course E. and W.				
12 2	74.36	▲	**Township Corner (NE) · Point about 700 ft. above River. Intersect S. bdy. of Tp 16 N., R. 4 E., 6.35 chs. W. of the ¼. cor. of Tps. 16 N., Rs. 4 and 5 E., at point of intersection I Set a granite stone, 18 x 12 x 10 ins. 12 ins. in the ground, for closing cor. of Tps. 15 N., Rs. 4 and 5 E., marked C.C., on S.; with 6 grooves on S., E., and W. faces; from which. a pine, 30 ins. diam., bears S. 74¾° E., 96 lks. dist., marked T.15 N., R.5, E., S. 6, B.T. a pine, 10 ins. diam., bears S. 74½° W., 48 lks. dist., marked**				100700

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 4 calls without a location

Numbers match the text table; only this scan page is shown.

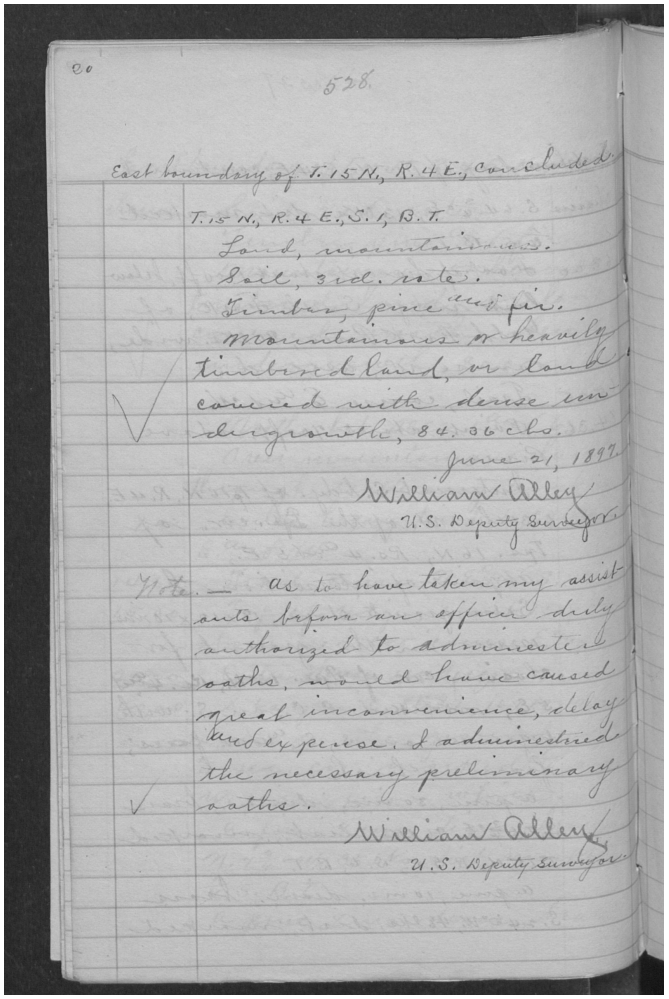

oo

528.

East boundary of T. 15 N., R. 4 E., Concluded.

T. 15 N., R. 4 E., S. 1, B. T.
Land, mountainous.
Soil, 3rd. rate.
Timber, pine and fir.
Mountainous or heavily timbered land, or land covered with dense un- dergrowth, 84. 36 chs.

June 21, 1897.

William Alley
U.S. Deputy Surveyor

Note. — as to have taken my assist- ants before an officer duly authorized to administer oaths, would have caused great inconvenience, delay and expense. I administered the necessary preliminary oaths.


William Alley
U.S. Deputy Surveyor

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1 2 3		●	oo 528. East boundary of T. 15 N., R. 4 E., Concluded. T. 15 N., R. 4 E., S. 1, B. T. Land, mountainous. Soil, 3rd. rate. Timber, pine and fir. Mountainous or heavily timbered land, or land covered with dense un- dergrowth, 84. 36 chs. June 21, 1897. William Alley U.S. Deputy Surveyor Note. — as to have taken my assist- ants before an officer duly authorized to administer oaths, would have caused great inconvenience, delay and expense. I administered the necessary preliminary oaths. William Alley U.S. Deputy Surveyor				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

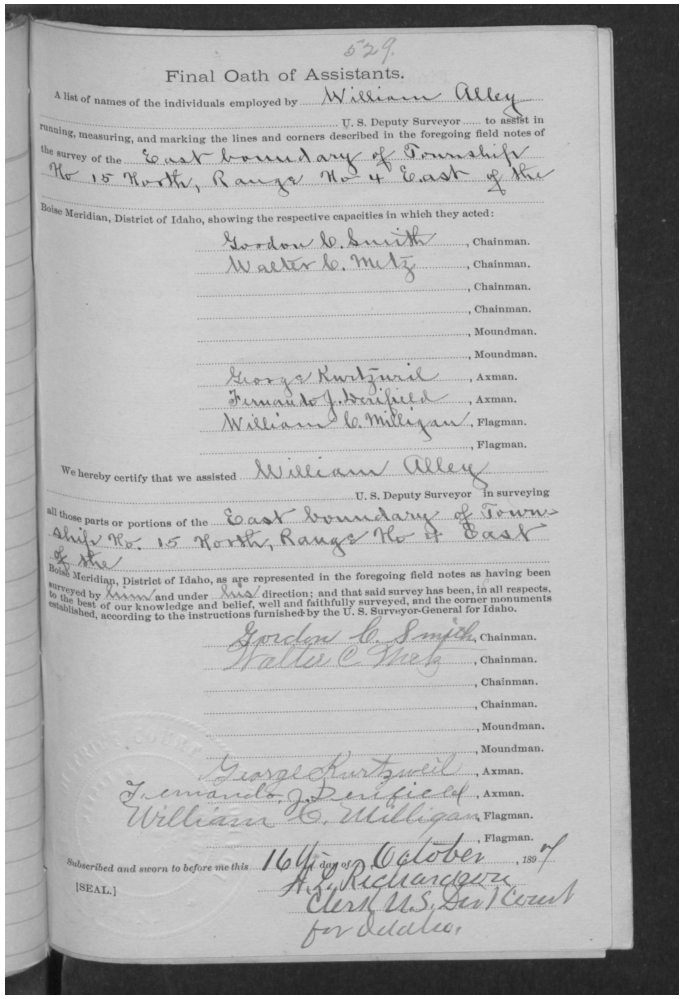

529.

Final Oath of Assistants.

A list of names of the individuals employed by William Alley U. S. Deputy Surveyor to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of the East boundary of Township No. 15 North, Range No. 4 East of the Boise Meridian, District of Idaho, showing the respective capacities in which they acted:

Gordon C. Smith, Chainman.
Walter C. Metz, Chainman.
, Chainman.
, Chainman.
, Moundman.
, Moundman.
George Kurtzweil, Axman.
Fernando J. Derifield, Axman.
William C. Milligan, Flagman.
, Flagman.

We hereby certify that we assisted William Alley U. S. Deputy Surveyor in surveying all those parts or portions of the East boundary of Township No. 15 North, Range No. 4 East of the Boise Meridian, District of Idaho, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been, in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor-General for Idaho.

Gordon C. Smith, Chainman.
Walter C. Metz, Chainman.
, Chainman.
, Chainman.
, Moundman.
, Moundman.
George Kurtzweil, Axman.
Fernando J. Derifield, Axman.
William C. Milligan, Flagman.
, Flagman.

Subscribed and sworn to before me this 16th day of October, 189 7.

[SEAL.]

H. B. Richardson
Clerk U.S. Dist. Court
for Idaho.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
12 4		●	529. Final Oath of Assistants. A list of names of the individuals employed by William Alley U. S. Deputy Surveyor to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of the East boundary of Township No. 15 North, Range No. 4 East of the Boise Meridian, District of Idaho, showing the respective capacities in which they acted: Gordon C. Smith, Chainman. Walter C. Metz, Chainman. , Chainman. , Chainman. , Moundman. , Moundman. George Kurtzweil, Axman. Fernando J. Derifield, Axman. William C. Milligan, Flagman. , Flagman. We hereby certify that we assisted William Alley U. S. Deputy Surveyor in surveying all those parts or portions of the East boundary of Township No. 15 North, Range No. 4 East of the Boise Meridian, District of Idaho, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been, in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor-General for Idaho. Gordon C. Smith, Chainman. Walter C. Metz, Chainman. , Chainman. , Chainman. , Moundman. , Moundman. George Kurtzweil, Axman. Fernando J. Derifield, Axman. William C. Milligan, Flagman. , Flagman. Subscribed and sworn to before me this 16th day of October, 189[7] H. B. Richardson Clerk U.S. Dist. Court for Idaho. [SEAL.]				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

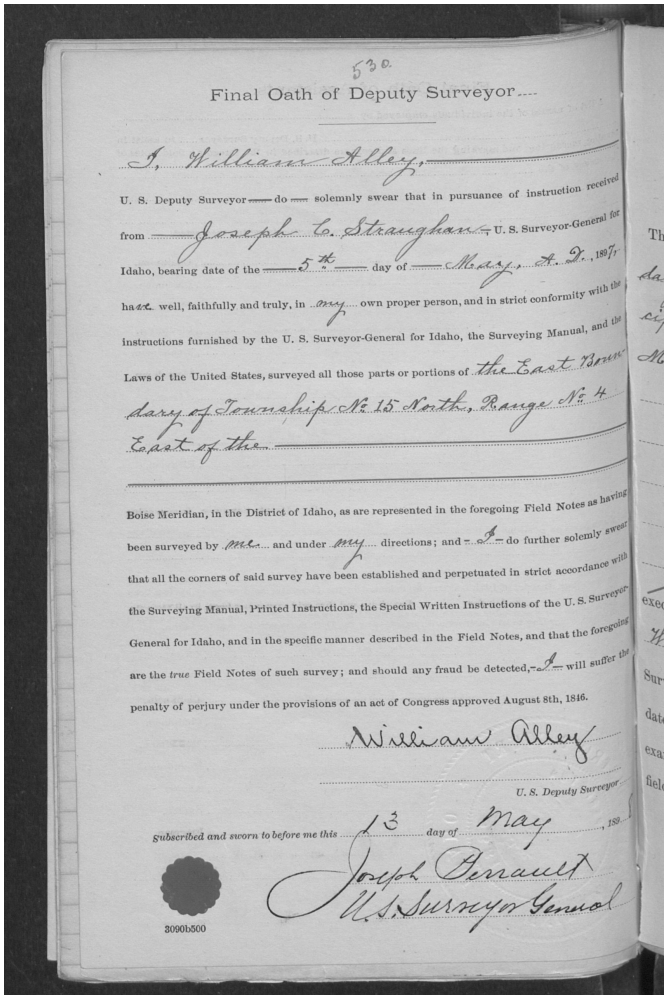

530.

Final Oath of Deputy Surveyor.

I, William Alley,

U. S. Deputy Surveyor — do — solemnly swear that in pursuance of instruction received from — Joseph C. Straughan, — U. S. Surveyor-General for Idaho, bearing date of the — 5th — day of — May, A. D., 1897, have well, faithfully and truly, in any own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor-General for Idaho, the Surveying Manual, and the Laws of the United States, surveyed all those parts or portions of the East Boundary of Township No 15 North, Range No 4 East of the — Boise Meridian, in the District of Idaho, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and — I — do further solemly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, Printed Instructions, the Special Written Instructions of the U. S. Surveyor- General for Idaho, and in the specific manner described in the Field Notes, and that the foregoing are the true Field Notes of such survey; and should any fraud be detected, — I — will suffer the penalty of perjury under the provisions of an act of Congress approved August 8th, 1846.

William Alley

U. S. Deputy Surveyor.

Subscribed and sworn to before me this 13 day of May, 189[illegible]

Joseph Penault
U.S. Surveyor General

3090b500

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
12 5		●	530. Final Oath of Deputy Surveyor I, William Alley, U. S. Deputy Surveyor — do — solemnly swear that in pursuance of instruction received from — Joseph C. Straughan, U. S. Surveyor-General for Idaho, bearing date of the — 5th — day of — May, A. D., 1897, have well, faithfully and truly, in any own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor-General for Idaho, the Surveying Manual, and the Laws of the United States, surveyed all those parts or portions of the East Boun- dary of Township No 15 North, Range No 4 East of the — Boise Meridian, in the District of Idaho, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and — I — do further solemly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, Printed Instructions, the Special Written Instructions of the U. S. Surveyor- General for Idaho, and in the specific manner described in the Field Notes, and that the foregoing are the true Field Notes of such survey; and should any fraud be detected, — I — will suffer the penalty of perjury under the provisions of an act of Congress approved August 8th, 1846. William Alley U. S. Deputy Surveyor Subscribed and sworn to before me this 13 day of May, 189[?] Joseph Penault U. S. Surveyor General 3090b500				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

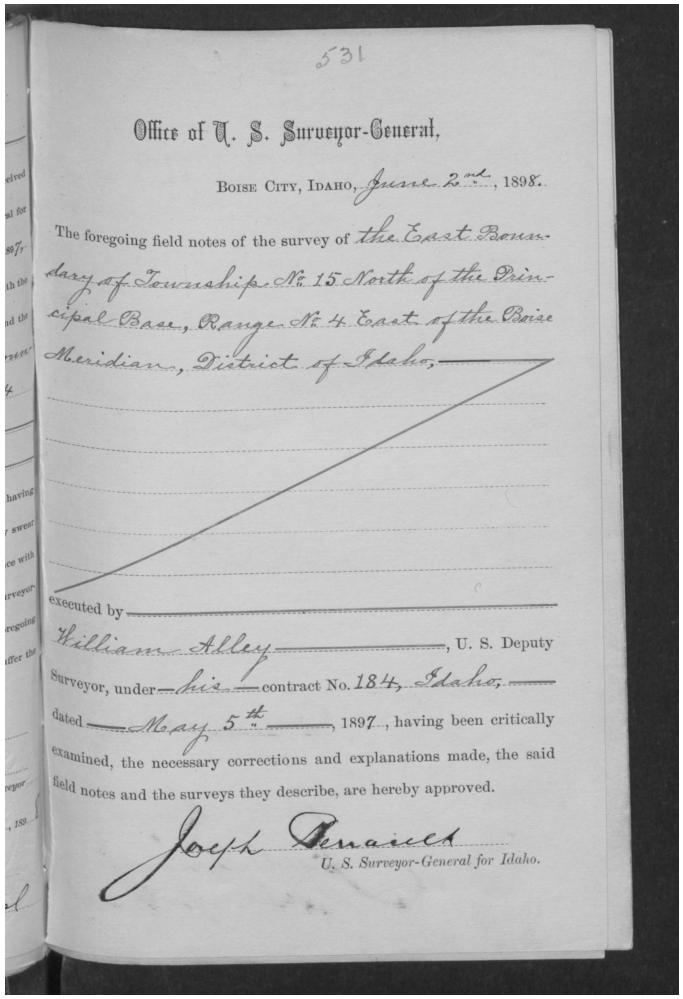

531

Office of U. S. Surveyor-General,

Boise City, Idaho, June 2nd, 1898.

The foregoing field notes of the survey of the East Boundary of Township No. 15 North of the Principal Base, Range No. 4 East of the Boise Meridian, District of Idaho,

executed by William Alley, U. S. Deputy Surveyor, under his contract No. 184, Idaho, dated May 5th, 1897, having been critically examined, the necessary corrections and explanations made, the said field notes and the surveys they describe, are hereby approved.

Joseph Pernaise
U. S. Surveyor-General for Idaho.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1 2 6		●	531 Office of U. S. Surveyor-General, Boise City, Idaho, June 2nd, 1898. The foregoing field notes of the survey of the East Boundary of Township No. 15 North of the Principal Base, Range No. 4 East of the Boise Meridian, District of Idaho, executed by William Alley, U. S. Deputy Surveyor, under his contract No. 184, Idaho, dated May 5th, 1897, having been critically examined, the necessary corrections and explanations made, the said field notes and the surveys they describe, are hereby approved. Joseph Pernaise[?] U. S. Surveyor-General for Idaho.				

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Sections 1 & 6 & 7 & 12 & 13 & 18 & 19 & 24 & 31 & 36 · North

Adams County, ID

START CORNER (ch 0.00)

Township corner (SE)

GCDB code: 100100

NOTABLE CALLS ALONG RUN

ch 0.00 Township corner (SE)
ch 0.00 Township corner (SE)
ch 0.00 Corner, Secs. 13 & 24
ch 0.00 Corner, Secs. 12 & 13
ch 0.00 Corner, Secs. 12 & 13
ch 0.00 Corner, Secs. 1 & 12
ch 0.01 Creek, 15 lks. wide, course N.W. — Creek, 15 lks. wide, course N.W.
ch 0.56 Small stream, 3 lks. wide, course S.W. — Foot of descent; Small stream, 3 lks. wide, course S.W., ascend.
ch 1.86 Same creek, 12 lks. wide, course N.E. — Same creek, 12 lks. wide, course N.E.
ch 2.35 Same creek, 10 lks. wide, course N.W. — Same creek, 10 lks. wide, course N.W.

END CORNER (ch 80.00)

Corner, Secs. 1 & 12

GCDB code: 700600

74 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE · Sections: 1 · 6 · 7 · 12 · 13 · 18 · 19 · 24 · 31 · 36 · North

Run Geolocate on this document to generate the elevation profile.

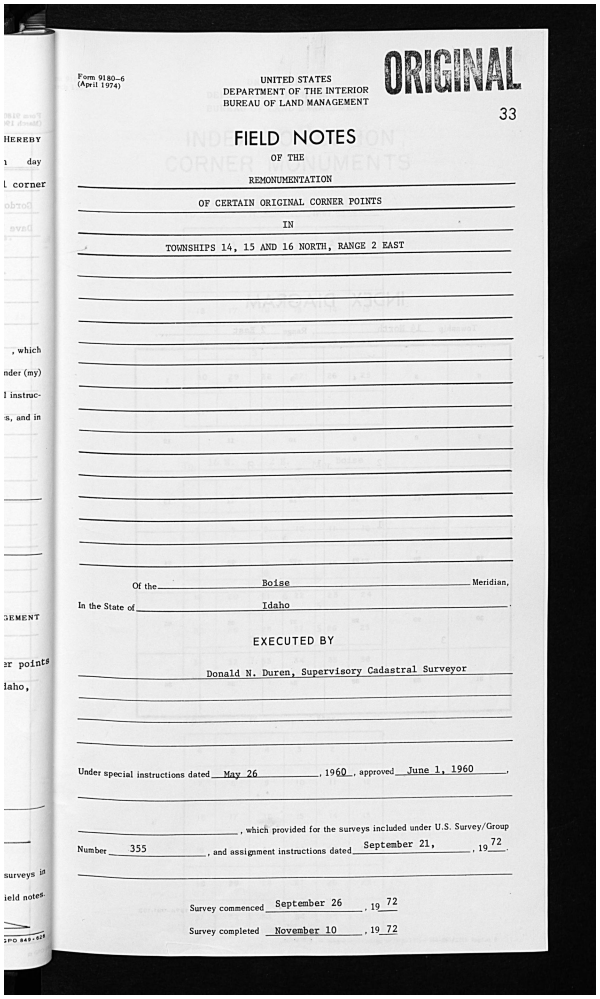

Form 9180-6
(April 1974)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

33

FIELD NOTES
OF THE
REMONUMENTATION
OF CERTAIN ORIGINAL CORNER POINTS
IN
TOWNSHIPS 14, 15 AND 16 NORTH, RANGE 2 EAST

Of the Boise Meridian,
In the State of Idaho

EXECUTED BY

Donald N. Duren, Supervisory Cadastral Surveyor

Under special instructions dated May 26, 1960, approved June 1, 1960,

, which provided for the surveys included under U.S. Survey/Group
Number 355, and assignment instructions dated September 21, , 19 72.

Survey commenced September 26, 19 72


Survey completed November 10, 19 72

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	Form 9180-6 (April 1974) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT ORIGINAL 33 FIELD NOTES OF THE REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS IN TOWNSHIPS 14, 15 AND 16 NORTH, RANGE 2 EAST Of the Boise Meridian, In the State of Idaho. EXECUTED BY Donald N. Duren, Supervisory Cadastral Surveyor Under special instructions dated May 26 , 1960, approved June 1, 1960, , which provided for the surveys included under U.S. Survey/Group Number 355 , and assignment instructions dated September 21, , 19 72. Survey commenced September 26 , 19 72 Survey completed November 10 , 19 72 GPO 849-628				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

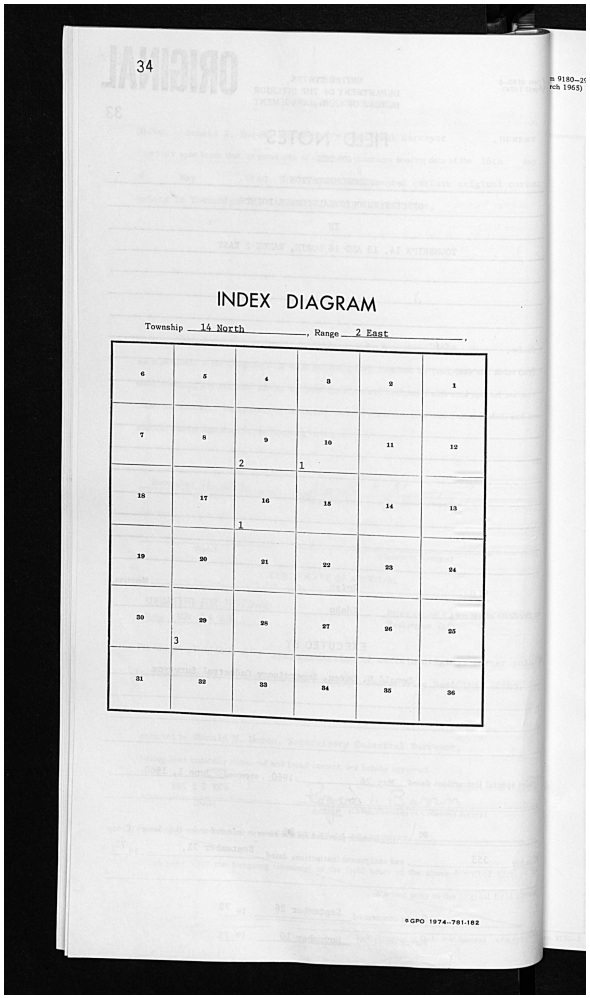


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
2		●	34 INDEX DIAGRAM Township 14 North , Range 2 East , 6 5 4 3 2 1 7 8 9 10 11 12 2 1 18 17 16 15 14 13 1 19 20 21 22 23 24 30 29 28 27 26 25 3 31 32 33 34 35 36 &GPO 1974-781-182				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

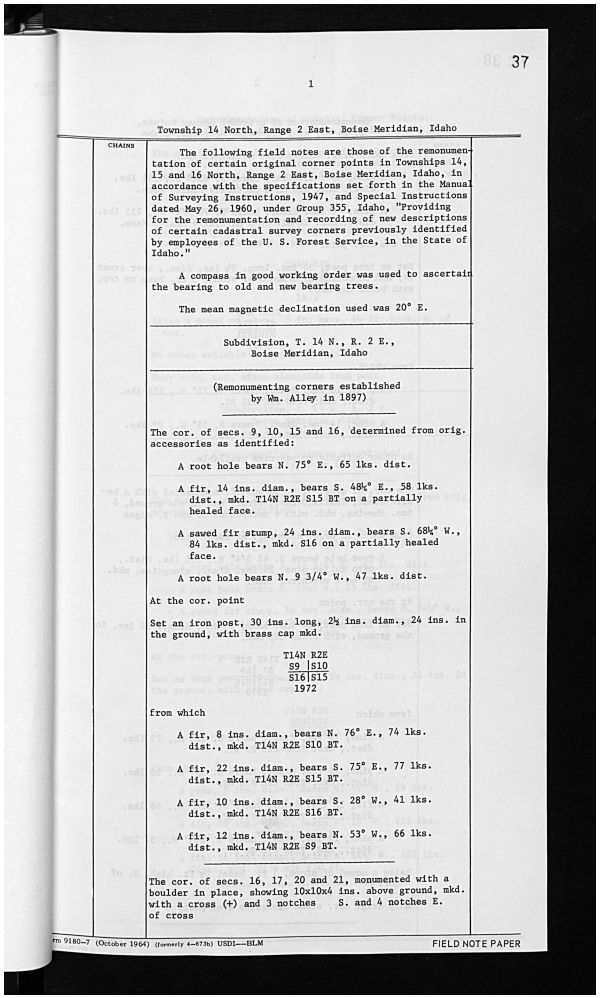

37

1

Township 14 North, Range 2 East, Boise Meridian, Idaho

CHAINS

The following field notes are those of the remonumentation of certain original corner points in Townships 14, 15 and 16 North, Range 2 East, Boise Meridian, Idaho, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated May 26, 1960, under Group 355, Idaho, "Providing for the remonumentation and recording of new descriptions of certain cadastral survey corners previously identified by employees of the U. S. Forest Service, in the State of Idaho."

A compass in good working order was used to ascertain the bearing to old and new bearing trees.

The mean magnetic declination used was 20° E.

Subdivision, T. 14 N., R. 2 E.,
Boise Meridian, Idaho

(Remonumenting corners established
by Wm. Alley in 1897)

The cor. of secs. 9, 10, 15 and 16, determined from orig. accessories as identified:

A root hole bears N. 75° E., 65 lks. dist.

A fir, 14 ins. diam., bears S. 48½° E., 58 lks. dist., mkd. T14N R2E S15 BT on a partially healed face.

A sawed fir stump, 24 ins. diam., bears S. 68½° W., 84 lks. dist., mkd. S16 on a partially healed face.

A root hole bears N. 9 3/4° W., 47 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R2E
S9 |S10
S16|S15
1972

from which

A fir, 8 ins. diam., bears N. 76° E., 74 lks. dist., mkd. T14N R2E S10 BT.

A fir, 22 ins. diam., bears S. 75° E., 77 lks. dist., mkd. T14N R2E S15 BT.

A fir, 10 ins. diam., bears S. 28° W., 41 lks. dist., mkd. T14N R2E S16 BT.

A fir, 12 ins. diam., bears N. 53° W., 66 lks. dist., mkd. T14N R2E S9 BT.

The cor. of secs. 16, 17, 20 and 21, monumented with a boulder in place, showing 10x10x4 ins. above ground, mkd. with a cross (+) and 3 notches S. and 4 notches E. of cross

Form 9180–7 (October 1964) (formerly 4–673b) USDI—BLM

FIELD NOTE PAPER

PAGE SURVEY PLOT

N up




Lat 44.54215–44.55662 · Lon -116.23132–-116.21104

2 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
3			Township 14 North, Range 2 East, Boise Meridian, Idaho				
4		▲	**Township Corner (NE) · The following field notes are those of the remonumentation of certain original corner points in Townships 14, 15 and 16 North, Range 2 East, Boise Meridian, Idaho, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated May 26, 1960, under Group 355, Idaho, "Providing for the remonumentation and recording of new descriptions of certain cadastral survey corners previously identified by employees of the U. S. Forest Service, in the State of Idaho."**				100100
5			A compass in good working order was used to ascertain the bearing to old and new bearing trees.				
6			The mean magnetic declination used was 20° E.				
7			Subdivision, T. 14 N., R. 2 E., Boise Meridian, Idaho				
8			(Remonumenting corners established by Wm. Alley in 1897)				
9		▲	**Cor. Secs. 9-10-15-16 · [26 Feet] · The cor. of secs. 9, 10, 15 and 16, determined from orig. accessories as identified: A root hole bears N. 75° E., 65 lks. dist. A fir, 14 ins. diam., bears S. 48½° E., 58 lks. dist., mkd. T14N R2E S15 BT on a partially healed face. A sawed fir stump, 24 ins. diam., bears S. 68½° W., 84 lks. dist., mkd. S16 on a partially healed face. A root hole bears N. 9 3/4° W., 47 lks. dist. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T14N R2E S9 |S10 S16|S15 1972 from which A fir, 8 ins. diam., bears N. 76° E., 74 lks. dist., mkd. T14N R2E S10 BT. A fir, 22 ins. diam., bears S. 75° E., 77 lks. dist., mkd. T14N R2E S15 BT. A fir, 10 ins. diam., bears S. 28° W., 41 lks. dist., mkd. T14N R2E S16 BT. A fir, 12 ins. diam., bears N. 53° W., 66 lks. dist., mkd. T14N R2E S9 BT.**	6015 2	AER	44.5566,-116.2110	400500
10		▲	**Cor. Secs. 16-17-20-21 · [26 Feet] · The cor. of secs. 16, 17, 20 and 21, monumented with a boulder in place, showing 10x10x4 ins. above ground, mkd. with a cross (+) and 3 notches S. and 4 notches E. of cross**	5213 2	AER	44.5421,-116.2313	300400

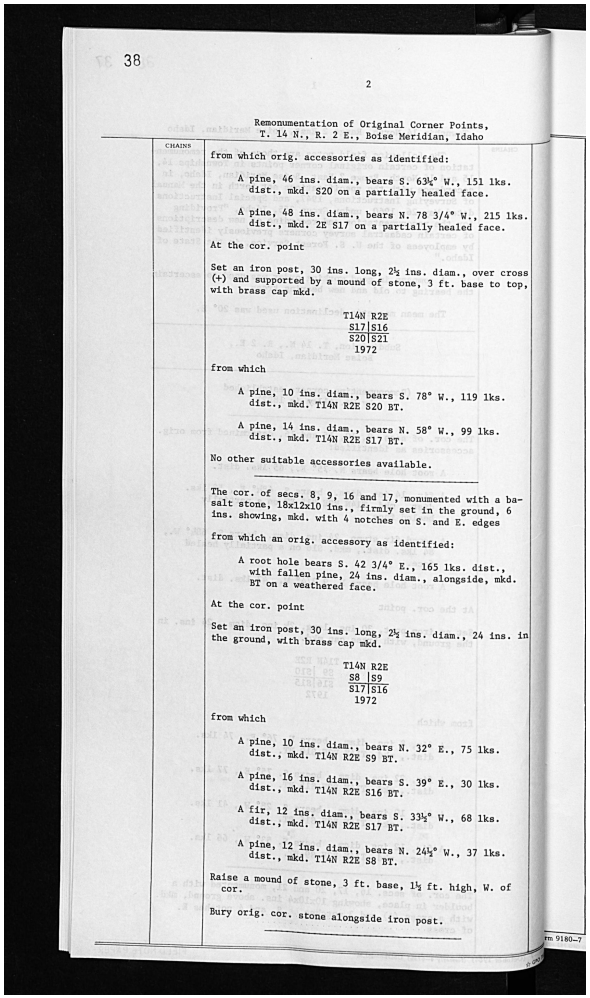

38

2

Remonumentation of Original Corner Points,
T. 14 N., R. 2 E., Boise Meridian, Idaho

CHAINS

from which orig. accessories as identified:

A pine, 46 ins. diam., bears S. 63¼° W., 151 lks. dist., mkd. S20 on a partially healed face.

A pine, 48 ins. diam., bears N. 78 3/4° W., 215 lks. dist., mkd. 2E S17 on a partially healed face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., over cross (+) and supported by a mound of stone, 3 ft. base to top, with brass cap mkd.

T14N R2E
S17|S16
S20|S21
1972

from which

A pine, 10 ins. diam., bears S. 78° W., 119 lks. dist., mkd. T14N R2E S20 BT.

A pine, 14 ins. diam., bears N. 58° W., 99 lks. dist., mkd. T14N R2E S17 BT.

No other suitable accessories available.

The cor. of secs. 8, 9, 16 and 17, monumented with a basalt stone, 18x12x10 ins., firmly set in the ground, 6 ins. showing, mkd. with 4 notches on S. and E. edges

from which an orig. accessory as identified:

A root hole bears S. 42 3/4° E., 165 lks. dist., with fallen pine, 24 ins. diam., alongside, mkd. BT on a weathered face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R2E
S8 |S9
S17|S16
1972

from which

A pine, 10 ins. diam., bears N. 32° E., 75 lks. dist., mkd. T14N R2E S9 BT.

A pine, 16 ins. diam., bears S. 39° E., 30 lks. dist., mkd. T14N R2E S16 BT.

A fir, 12 ins. diam., bears S. 33½° W., 68 lks. dist., mkd. T14N R2E S17 BT.

A pine, 12 ins. diam., bears N. 24½° W., 37 lks. dist., mkd. T14N R2E S8 BT.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Bury orig. cor. stone alongside iron post.

Form 9180-7

PAGE SURVEY PLOT N up




Lat 44.55665–44.55665 · Lon -116.23135–-116.23135

1 located symbols · 2 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
11		▲	**Remonumentation of Original Corner Points, T. 14 N., R. 2 E., Boise Meridian, Idaho**				
12		▲	**from which orig. accessories as identified: A pine, 46 ins. diam., bears S. 63¼° W., 151 lks. dist., mkd. S20 on a partially healed face. A pine, 48 ins. diam., bears N. 78 3/4° W., 215 lks. dist., mkd. 2E S17 on a partially healed face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., over cross (+) and supported by a mound of stone, 3 ft. base to top, with brass cap mkd. T14N R2E S17|S16 S20|S21 1972 from which A pine, 10 ins. diam., bears S. 78° W., 119 lks. dist., mkd. T14N R2E S20 BT. A pine, 14 ins. diam., bears N. 58° W., 99 lks. dist., mkd. T14N R2E S17 BT. No other suitable accessories available.**				
13		▲	**Cor. Secs. 8-9-16-17 · [26 Feet] · The cor. of secs. 8, 9, 16 and 17, monumented with a basalt stone, 18x12x10 ins., firmly set in the ground, 6 ins. showing, mkd. with 4 notches on S. and E. edges from which an orig. accessory as identified: A root hole bears S. 42 3/4° E., 165 lks. dist., with fallen pine, 24 ins. diam., alongside, mkd. BT on a weathered face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T14N R2E S8 |S9 S17|S16 1972 from which A pine, 10 ins. diam., bears N. 32° E., 75 lks. dist., mkd. T14N R2E S9 BT. A pine, 16 ins. diam., bears S. 39° E., 30 lks. dist., mkd. T14N R2E S16 BT. A fir, 12 ins. diam., bears S. 33½° W., 68 lks. dist., mkd. T14N R2E S17 BT. A pine, 12 ins. diam., bears N. 24½° W., 37 lks. dist., mkd. T14N R2E S8 BT. Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. Bury orig. cor. stone alongside iron post.**	5567 2	AER	44.5566,-116.2314	300500

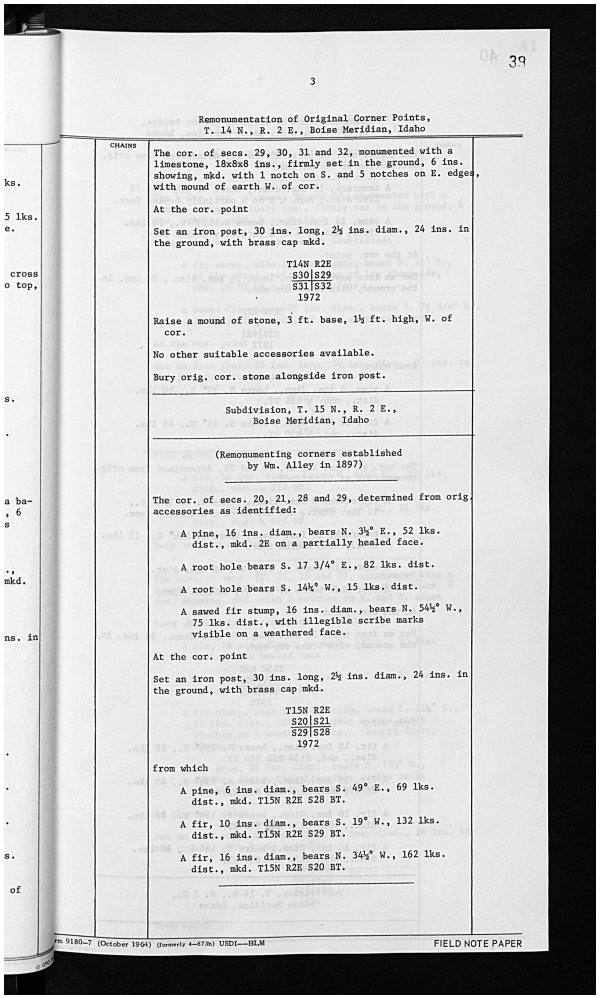

39

3

Remonumentation of Original Corner Points,
T. 14 N., R. 2 E., Boise Meridian, Idaho

CHAINS

The cor. of secs. 29, 30, 31 and 32, monumented with a limestone, 18x8x8 ins., firmly set in the ground, 6 ins. showing, mkd. with 1 notch on S. and 5 notches on E. edges, with mound of earth W. of cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R2E
S30|S29
S31|S32
1972

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

No other suitable accessories available.

Bury orig. cor. stone alongside iron post.

Subdivision, T. 15 N., R. 2 E.,
Boise Meridian, Idaho

(Remonumenting corners established
by Wm. Alley in 1897)

The cor. of secs. 20, 21, 28 and 29, determined from orig. accessories as identified:

A pine, 16 ins. diam., bears N. 3½° E., 52 lks. dist., mkd. 2E on a partially healed face.

A root hole bears S. 17 3/4° E., 82 lks. dist.

A root hole bears S. 14½° W., 15 lks. dist.

A sawed fir stump, 16 ins. diam., bears N. 54½° W., 75 lks. dist., with illegible scribe marks visible on a weathered face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15N R2E
S20|S21
S29|S28
1972

from which

A pine, 6 ins. diam., bears S. 49° E., 69 lks. dist., mkd. T15N R2E S28 BT.

A fir, 10 ins. diam., bears S. 19° W., 132 lks. dist., mkd. T15N R2E S29 BT.


A fir, 16 ins. diam., bears N. 34½° W., 162 lks. dist., mkd. T15N R2E S20 BT.

Fm 9180–7 (October 1964) (formerly 4–473b) USDI—BLM

FIELD NOTE PAPER

PAGE SURVEY PLOT

N up




Lat 44.51331–44.52772 · Lon -116.25127–-116.23125

3 located symbols · 15 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
14		▲	**Remonumentation of Original Corner Points, T. 14 N., R. 2 E., Boise Meridian, Idaho**				
15		▲	**Cor. Secs. 29-30-31-32 · [26 Feet] · The cor. of secs. 29, 30, 31 and 32, monumented with a limestone, 18x8x8 ins., firmly set in the ground, 6 ins. showing, mkd. with 1 notch on S. and 5 notches on E. edges, with mound of earth W. of cor.**	4432 2	AER	44.5133,-116.2513	200200
16		●	At the cor. point				
17		●	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T14N R2E S30|S29 S31|S32 1972				
18		●	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.				
19		●	No other suitable accessories available.				
20		●	Bury orig. cor. stone alongside iron post.				
21			Subdivision, T. 15 N., R. 2 E., Boise Meridian, Idaho				
22			(Remonumenting corners established by Wm. Alley in 1897)				
23		▲	**Cor. Secs. 20-21-28-29 · [36 Feet] · The cor. of secs. 20, 21, 28 and 29, determined from orig. accessories as identified:**	5014 2	AER	44.5277,-116.2313	300300
24		●	A pine, 16 ins. diam., bears N. 3½° E., 52 lks. dist., mkd. 2E on a partially healed face.				
25		●	A root hole bears S. 17 3/4° E., 82 lks. dist.				
26		●	A root hole bears S. 14½° W., 15 lks. dist.				
27		●	A sawed fir stump, 16 ins. diam., bears N. 54½° W., 75 lks. dist., with illegible scribe marks visible on a weathered face.				
28		●	At the cor. point				
29		▲	**Cor. Secs. 20-21-28-29 · [36 Feet] · Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T15N R2E S20|S21 S29|S28 1972**	5014 2	AER	44.5277,-116.2313	300300
30		●	from which				
31		●	A pine, 6 ins. diam., bears S. 49° E., 69 lks. dist., mkd. T15N R2E S28 BT.				
32		●	A fir, 10 ins. diam., bears S. 19° W., 132 lks. dist., mkd. T15N R2E S29 BT.				
33		●	A fir, 16 ins. diam., bears N. 34½° W., 162 lks. dist., mkd. T15N R2E S20 BT.				

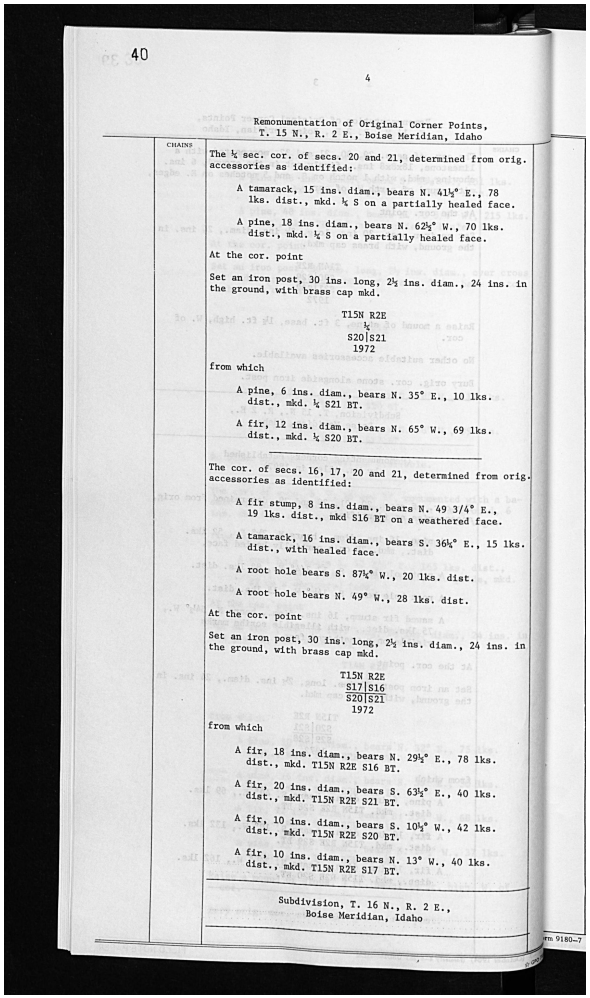

40

4

Remonumentation of Original Corner Points,
T. 15 N., R. 2 E., Boise Meridian, Idaho

CHAINS

The ¼ sec. cor. of secs. 20 and 21, determined from orig. accessories as identified:

A tamarack, 15 ins. diam., bears N. 41½° E., 78 lks. dist., mkd. ¼ S on a partially healed face.

A pine, 18 ins. diam., bears N. 62½° W., 70 lks. dist., mkd. ¼ S on a partially healed face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15N R2E
¼
S20|S21
1972

from which

A pine, 6 ins. diam., bears N. 35° E., 10 lks. dist., mkd. ¼ S21 BT.

A fir, 12 ins. diam., bears N. 65° W., 69 lks. dist., mkd. ¼ S20 BT.

The cor. of secs. 16, 17, 20 and 21, determined from orig. accessories as identified:

A fir stump, 8 ins. diam., bears N. 49 3/4° E., 19 lks. dist., mkd S16 BT on a weathered face.

A tamarack, 16 ins. diam., bears S. 36½° E., 15 lks. dist., with healed face.

A root hole bears S. 87½° W., 20 lks. dist.

A root hole bears N. 49° W., 28 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15N R2E
S17|S16
S20|S21
1972

from which

A fir, 18 ins. diam., bears N. 29½° E., 78 lks. dist., mkd. T15N R2E S16 BT.

A fir, 20 ins. diam., bears S. 63½° E., 40 lks. dist., mkd. T15N R2E S21 BT.

A fir, 10 ins. diam., bears S. 10½° W., 42 lks. dist., mkd. T15N R2E S20 BT.

A fir, 10 ins. diam., bears N. 13° W., 40 lks. dist., mkd. T15N R2E S17 BT.

Subdivision, T. 16 N., R. 2 E.,
Boise Meridian, Idaho

Form 9180-7

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
34		▲	**Remonumentation of Original Corner Points, T. 15 N., R. 2 E., Boise Meridian, Idaho**				
35		△	**The ¼ sec. cor. of secs. 20 and 21, determined from orig. accessories as identified: A tamarack, 15 ins. diam., bears N. 41½° E., 78 lks. dist., mkd. ¼ S on a partially healed face. A pine, 18 ins. diam., bears N. 62½° W., 70 lks. dist., mkd. ¼ S on a partially healed face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T15N R2E ¼ S20|S21 1972 from which A pine, 6 ins. diam., bears N. 35° E., 10 lks. dist., mkd. ¼ S21 BT. A fir, 12 ins. diam., bears N. 65° W., 69 lks. dist., mkd. ¼ S20 BT.**				
36		▲	**Cor. Secs. 16-17-20-21 · [26 Feet] · The cor. of secs. 16, 17, 20 and 21, determined from orig. accessories as identified: A fir stump, 8 ins. diam., bears N. 49 3/4° E., 19 lks. dist., mkd S16 BT on a weathered face. A tamarack, 16 ins. diam., bears S. 36½° E., 15 lks. dist., with healed face. A root hole bears S. 87½° W., 20 lks. dist. A root hole bears N. 49° W., 28 lks. dist. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T15N R2E S17|S16 S20|S21 1972 from which A fir, 18 ins. diam., bears N. 29½° E., 78 lks. dist., mkd. T15N R2E S16 BT. A fir, 20 ins. diam., bears S. 63½° E., 40 lks. dist., mkd. T15N R2E S21 BT. A fir, 10 ins. diam., bears S. 10½° W., 42 lks. dist., mkd. T15N R2E S20 BT. A fir, 10 ins. diam., bears N. 13° W., 40 lks. dist., mkd. T15N R2E S17 BT.**	5213 2	AER	44.5421,-116.2313	300400
37			Subdivision, T. 16 N., R. 2 E., Boise Meridian, Idaho				

PAGE SURVEY PLOT


N up



Lat 44.54215–44.54215 · Lon -116.23132–-116.23132

1 located symbols · 2 calls without a location

Numbers match the text table; only this scan page is shown.

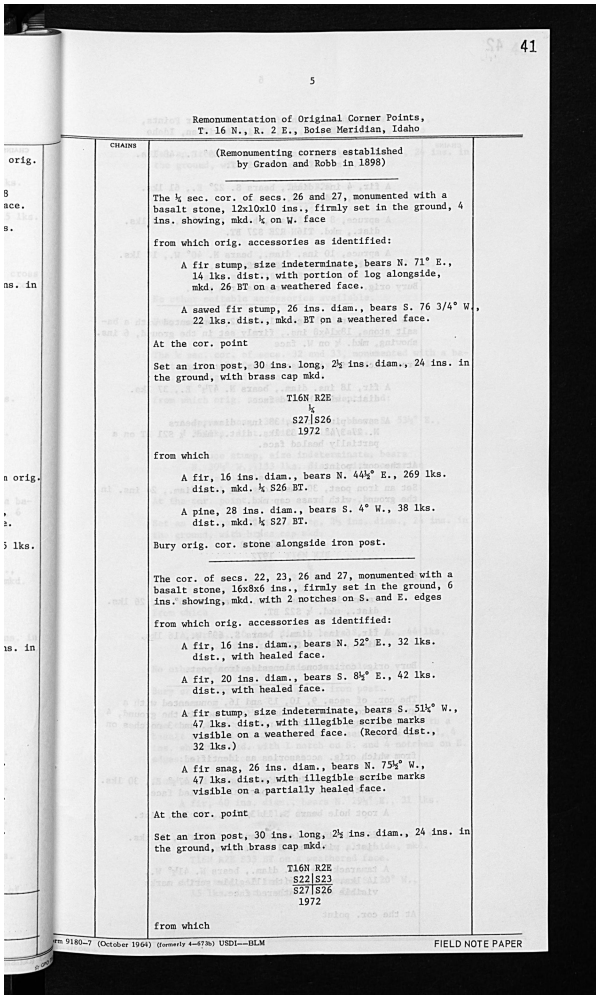

41

5

Remonumentation of Original Corner Points,
T. 16 N., R. 2 E., Boise Meridian, Idaho

CHAINS

(Remonumenting corners established
by Gradon and Robb in 1898)

The ¼ sec. cor. of secs. 26 and 27, monumented with a basalt stone, 12x10x10 ins., firmly set in the ground, 4 ins. showing, mkd. ¼ on W. face

from which orig. accessories as identified:

A fir stump, size indeterminate, bears N. 71° E., 14 lks. dist., with portion of log alongside, mkd. 26 BT on a weathered face.

A sawed fir stump, 26 ins. diam., bears S. 76 3/4° W., 22 lks. dist., mkd. BT on a weathered face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16N R2E
¼
S27|S26
1972

from which

A fir, 16 ins. diam., bears N. 44½° E., 269 lks. dist., mkd. ¼ S26 BT.

A pine, 28 ins. diam., bears S. 4° W., 38 lks. dist., mkd. ¼ S27 BT.

Bury orig. cor. stone alongside iron post.

The cor. of secs. 22, 23, 26 and 27, monumented with a basalt stone, 16x8x6 ins., firmly set in the ground, 6 ins. showing, mkd. with 2 notches on S. and E. edges

from which orig. accessories as identified:

A fir, 16 ins. diam., bears N. 52° E., 32 lks. dist., with healed face.

A fir, 20 ins. diam., bears S. 8½° E., 42 lks. dist., with healed face.

A fir stump, size indeterminate, bears S. 51¼° W., 47 lks. dist., with illegible scribe marks visible on a weathered face. (Record dist., 32 lks.)

A fir snag, 26 ins. diam., bears N. 75½° W., 47 lks. dist., with illegible scribe marks visible on a partially healed face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16N R2E
S22|S23
S27|S26
1972

from which

rm 9180–7 (October 1964) (formerly 4–673b) USDI—BLM

FIELD NOTE PAPER

PAGE SURVEY PLOT

N up




Lat 44.52781–44.52781 · Lon -116.19097–-116.19097

1 located symbols · 2 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
38		▲	**Remonumentation of Original Corner Points, T. 16 N., R. 2 E., Boise Meridian, Idaho**				
39			(Remonumenting corners established by Gradon and Robb in 1898)				
40		△	**The ¼ sec. cor. of secs. 26 and 27, monumented with a basalt stone, 12x10x10 ins., firmly set in the ground, 4 ins. showing, mkd. ¼ on W. face from which orig. accessories as identified: A fir stump, size indeterminate, bears N. 71° E., 14 lks. dist., with portion of log alongside, mkd. 26 BT on a weathered face. A sawed fir stump, 26 ins. diam., bears S. 76 3/4° W., 22 lks. dist., mkd. BT on a weathered face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T16N R2E ¼ S27|S26 1972 from which A fir, 16 ins. diam., bears N. 44½° E., 269 lks. dist., mkd. ¼ S26 BT. A pine, 28 ins. diam., bears S. 4° W., 38 lks. dist., mkd. ¼ S27 BT. Bury orig. cor. stone alongside iron post.**				
41		▲	**Cor. Secs. 22-23-26-27 · [38 Feet] · The cor. of secs. 22, 23, 26 and 27, monumented with a basalt stone, 16x8x6 ins., firmly set in the ground, 6 ins. showing, mkd. with 2 notches on S. and E. edges from which orig. accessories as identified: A fir, 16 ins. diam., bears N. 52° E., 32 lks. dist., with healed face. A fir, 20 ins. diam., bears S. 8½° E., 42 lks. dist., with healed face. A fir stump, size indeterminate, bears S. 51¼° W., 47 lks. dist., with illegible scribe marks visible on a weathered face. (Record dist., 32 lks.) A fir snag, 26 ins. diam., bears N. 75½° W., 47 lks. dist., with illegible scribe marks visible on a partially healed face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T16N R2E S22|S23 S27|S26 1972 from which**	6212 2	AER	44.5278,-116.1910	500300

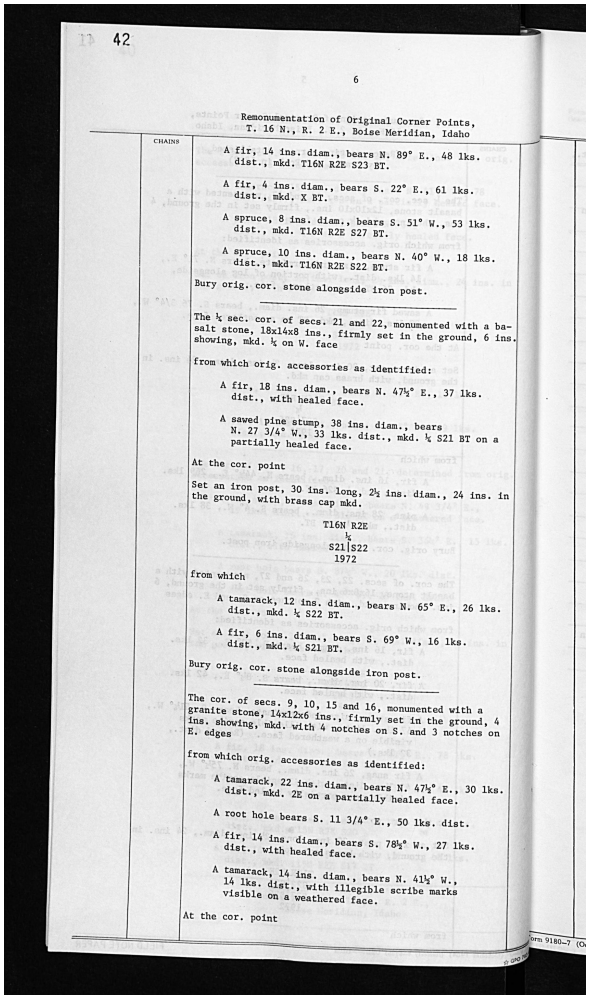

42

6

Remonumentation of Original Corner Points,
T. 16 N., R. 2 E., Boise Meridian, Idaho

CHAINS

A fir, 14 ins. diam., bears N. 89° E., 48 lks. dist., mkd. T16N R2E S23 BT.

A fir, 4 ins. diam., bears S. 22° E., 61 lks. dist., mkd. X BT.

A spruce, 8 ins. diam., bears S. 51° W., 53 lks. dist., mkd. T16N R2E S27 BT.

A spruce, 10 ins. diam., bears N. 40° W., 18 lks. dist., mkd. T16N R2E S22 BT.

Bury orig. cor. stone alongside iron post.

The ¼ sec. cor. of secs. 21 and 22, monumented with a basalt stone, 18x14x8 ins., firmly set in the ground, 6 ins. showing, mkd. ¼ on W. face

from which orig. accessories as identified:

A fir, 18 ins. diam., bears N. 47½° E., 37 lks. dist., with healed face.

A sawed pine stump, 38 ins. diam., bears N. 27 3/4° W., 33 lks. dist., mkd. ¼ S21 BT on a partially healed face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16N R2E
¼
S21|S22
1972

from which

A tamarack, 12 ins. diam., bears N. 65° E., 26 lks. dist., mkd. ¼ S22 BT.

A fir, 6 ins. diam., bears S. 69° W., 16 lks. dist., mkd. ¼ S21 BT.

Bury orig. cor. stone alongside iron post.

The cor. of secs. 9, 10, 15 and 16, monumented with a granite stone, 14x12x6 ins., firmly set in the ground, 4 ins. showing, mkd. with 4 notches on S. and 3 notches on E. edges

from which orig. accessories as identified:

A tamarack, 22 ins. diam., bears N. 47½° E., 30 lks. dist., mkd. 2E on a partially healed face.

A root hole bears S. 11 3/4° E., 50 lks. dist.

A fir, 14 ins. diam., bears S. 78½° W., 27 lks. dist., with healed face.

A tamarack, 14 ins. diam., bears N. 41½° W., 14 lks. dist., with illegible scribe marks visible on a weathered face.

At the cor. point

Form 9180–7 (O

PAGE SURVEY PLOT N up




Lat 44.55662–44.55662 · Lon -116.21104–-116.21104

1 located symbols · 7 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
42		▲	**Remonumentation of Original Corner Points, T. 16 N., R. 2 E., Boise Meridian, Idaho**				
43		●	A fir, 14 ins. diam., bears N. 89° E., 48 lks. dist., mkd. T16N R2E S23 BT.				
44		●	A fir, 4 ins. diam., bears S. 22° E., 61 lks. dist., mkd. X BT.				
45		●	A spruce, 8 ins. diam., bears S. 51° W., 53 lks. dist., mkd. T16N R2E S27 BT.				
46		●	A spruce, 10 ins. diam., bears N. 40° W., 18 lks. dist., mkd. T16N R2E S22 BT.				
47		●	Bury orig. cor. stone alongside iron post.				
48		▲	**The ¼ sec. cor. of secs. 21 and 22, monumented with a basalt stone, 18x14x8 ins., firmly set in the ground, 6 ins. showing, mkd. ¼ on W. face from which orig. accessories as identified: A fir, 18 ins. diam., bears N. 47½° E., 37 lks. dist., with healed face. A sawed pine stump, 38 ins. diam., bears N. 27 3/4° W., 33 lks. dist., mkd. ¼ S21 BT on a partially healed face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T16N R2E ¼ S21|S22 1972 from which A tamarack, 12 ins. diam., bears N. 65° E., 26 lks. dist., mkd. ¼ S22 BT. A fir, 6 ins. diam., bears S. 69° W., 16 lks. dist., mkd. ¼ S21 BT. Bury orig. cor. stone alongside iron post.**				
49		▲	**Cor. Secs. 9-10-15-16 · [26 Feet] · The cor. of secs. 9, 10, 15 and 16, monumented with a granite stone, 14x12x6 ins., firmly set in the ground, 4 ins. showing, mkd. with 4 notches on S. and 3 notches on E. edges from which orig. accessories as identified: A tamarack, 22 ins. diam., bears N. 47½° E., 30 lks. dist., mkd. 2E on a partially healed face. A root hole bears S. 11 3/4° E., 50 lks. dist. A fir, 14 ins. diam., bears S. 78½° W., 27 lks. dist., with healed face. A tamarack, 14 ins. diam., bears N. 41½° W., 14 lks. dist., with illegible scribe marks visible on a weathered face. At the cor. point**	6015 2	AER	44.5566,-116.2 110	400500

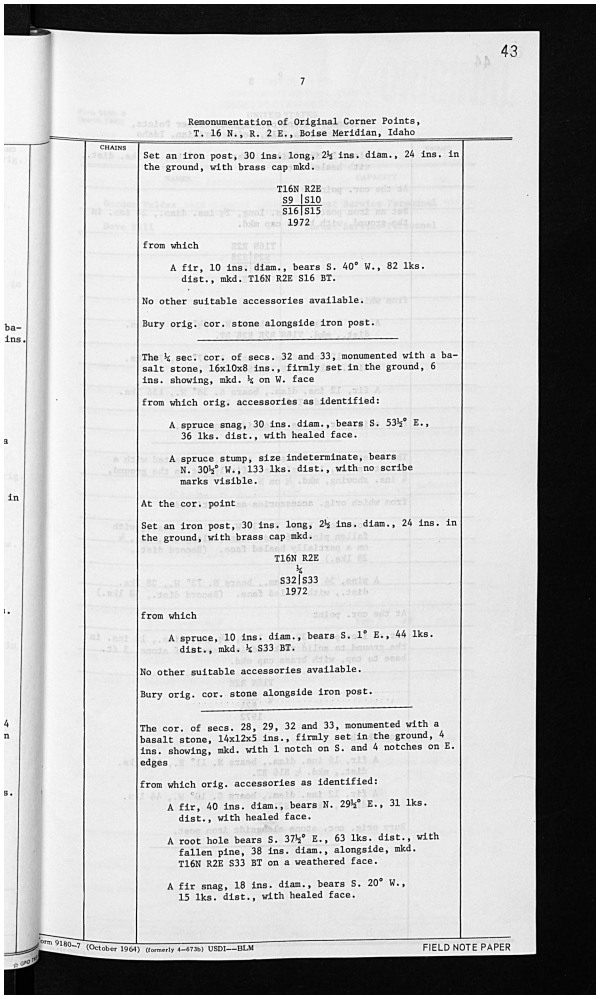

43

7

Remonumentation of Original Corner Points,
T. 16 N., R. 2 E., Boise Meridian, Idaho

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16N R2E
S9 | S10
S16 | S15
1972

from which

A fir, 10 ins. diam., bears S. 40° W., 82 lks. dist., mkd. T16N R2E S16 BT.

No other suitable accessories available.

Bury orig. cor. stone alongside iron post.

The ¼ sec. cor. of secs. 32 and 33, monumented with a basalt stone, 16x10x8 ins., firmly set in the ground, 6 ins. showing, mkd. ¼ on W. face

from which orig. accessories as identified:

A spruce snag, 30 ins. diam., bears S. 53½° E., 36 lks. dist., with healed face.

A spruce stump, size indeterminate, bears N. 30½° W., 133 lks. dist., with no scribe marks visible.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16N R2E
¼
S32 | S33
1972

from which

A spruce, 10 ins. diam., bears S. 1° E., 44 lks. dist., mkd. ¼ S33 BT.

No other suitable accessories available.

Bury orig. cor. stone alongside iron post.

The cor. of secs. 28, 29, 32 and 33, monumented with a basalt stone, 14x12x5 ins., firmly set in the ground, 4 ins. showing, mkd. with 1 notch on S. and 4 notches on E. edges

from which orig. accessories as identified:

A fir, 40 ins. diam., bears N. 29½° E., 31 lks. dist., with healed face.

A root hole bears S. 37½° E., 63 lks. dist., with fallen pine, 38 ins. diam., alongside, mkd. T16N R2E S33 BT on a weathered face.

A fir snag, 18 ins. diam., bears S. 20° W., 15 lks. dist., with healed face.

Form 9180–7 (October 1964) (formerly 4–473b) USDI—BLM

FIELD NOTE PAPER

PAGE SURVEY PLOT

N up






Lat 44.49885–44.51329 · Lon -116.23123—116.23122

2 located symbols · 3 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
50		▲	**Remonumentation of Original Corner Points, T. 16 N., R. 2 E., Boise Meridian, Idaho**				
51		▲	**Cor. Secs. 32-33 · [20 Feet] · Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T16N R2E S9 | S10 S16|S15 1972 from which A fir, 10 ins. diam., bears S. 40° W., 82 lks. dist., mkd. T16N R2E S16 BT. No other suitable accessories available. Bury orig. cor. stone alongside iron post.**		AER	44.4989,-116.2312	300100
52		△	**The ¼ sec. cor. of secs. 32 and 33, monumented with a basalt stone, 16x10x8 ins., firmly set in the ground, 6 ins. showing, mkd. ¼ on W. face from which orig. accessories as identified: A spruce snag, 30 ins. diam., bears S. 53½° E., 36 lks. dist., with healed face. A spruce stump, size indeterminate, bears N. 30½° W., 133 lks. dist., with no scribe marks visible.**				
53		△	**At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T16N R2E ¼ S32|S33 1972 from which A spruce, 10 ins. diam., bears S. 1° E., 44 lks. dist., mkd. ¼ S33 BT. No other suitable accessories available. Bury orig. cor. stone alongside iron post.**				
54		▲	**Cor. Secs. 28-29-32-33 · [35 Feet] · The cor. of secs. 28, 29, 32 and 33, monumented with a basalt stone, 14x12x5 ins., firmly set in the ground, 4 ins. showing, mkd. 1 notch on S. and 4 notches on E. edges from which orig. accessories as identified: A fir, 40 ins. diam., bears N. 29½° E., 31 lks. dist., with healed face. A root hole bears S. 37½° E., 63 lks. dist., with fallen pine, 18 ins. diam., alongside, mkd. T16N R2E S33 BT on a weathered face. A fir snag, 18 ins. diam., bears S. 20° W., 15 lks. dist., with healed face.**	5031 2	AER	44.5133,-116.2312	300200

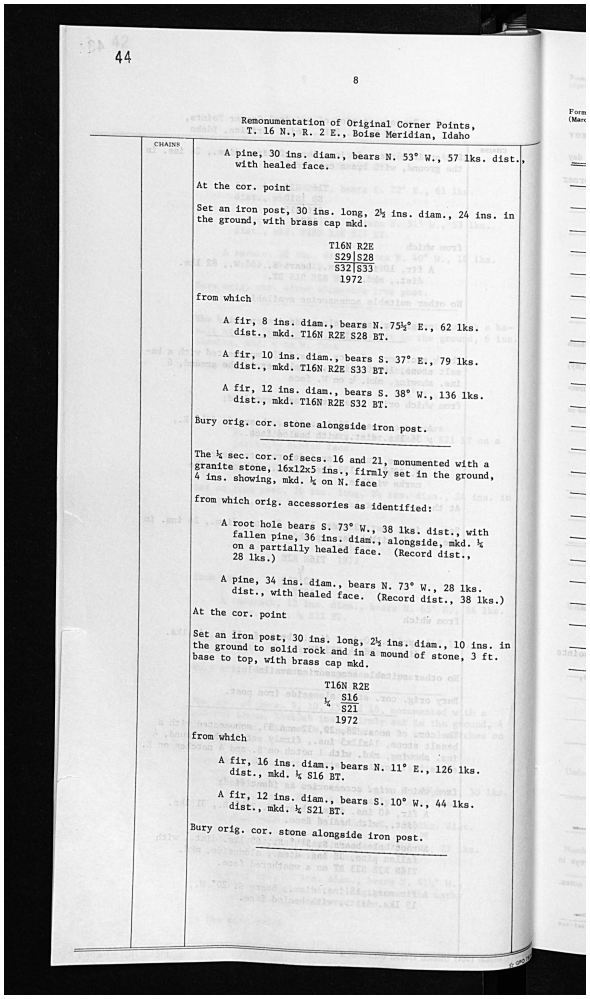

44

8

Remonumentation of Original Corner Points,
T. 16 N., R. 2 E., Boise Meridian, Idaho

CHAINS

A pine, 30 ins. diam., bears N. 53° W., 57 lks. dist., with healed face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16N R2E
S29|S28
S32|S33
1972

from which

A fir, 8 ins. diam., bears N. 75½° E., 62 lks. dist., mkd. T16N R2E S28 BT.

A fir, 10 ins. diam., bears S. 37° E., 79 lks. dist., mkd. T16N R2E S33 BT.

A fir, 12 ins. diam., bears S. 38° W., 136 lks. dist., mkd. T16N R2E S32 BT.

Bury orig. cor. stone alongside iron post.

The ¼ sec. cor. of secs. 16 and 21, monumented with a granite stone, 16x12x5 ins., firmly set in the ground, 4 ins. showing, mkd. ¼ on N. face

from which orig. accessories as identified:

A root hole bears S. 73° W., 38 lks. dist., with fallen pine, 36 ins. diam., alongside, mkd. ¼ on a partially healed face. (Record dist., 28 lks.)

A pine, 34 ins. diam., bears N. 73° W., 28 lks. dist., with healed face. (Record dist., 38 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T16N R2E
¼ S16
S21
1972

from which

A fir, 16 ins. diam., bears N. 11° E., 126 lks. dist., mkd. ¼ S16 BT.

A fir, 12 ins. diam., bears S. 10° W., 44 lks. dist., mkd. ¼ S21 BT.

Bury orig. cor. stone alongside iron post.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
55		▲	**Remonumentation of Original Corner Points, T. 16 N., R. 2 E., Boise Meridian, Idaho**				
56		●	A pine, 30 ins. diam., bears N. 53° W., 57 lks. dist., with healed face.				
57		●	At the cor. point				
58		▲	**Cor. Secs. 15-16-21-22 · [26 Feet] · Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T16N R2E S29|S28 S32|S33 1972 from which A fir, 8 ins. diam., bears N. 75½° E., 62 lks. dist., mkd. T16N R2E S28 BT. A fir, 10 ins. diam., bears S. 37° E., 79 lks. dist., mkd. T16N R2E S33 BT. A fir, 12 ins. diam., bears S. 38° W., 136 lks. dist., mkd. T16N R2E S32 BT. Bury orig. cor. stone alongside iron post.**	5321 2	AER	44.5422,-116.2111	400400
59		△	**The ¼ sec. cor. of secs. 16 and 21, monumented with a granite stone, 16x12x5 ins., firmly set in the ground, 4 ins. showing, mkd. ¼ on N. face from which orig. accessories as identified: A root hole bears S. 73° W., 38 lks. dist., with fallen pine, 36 ins. diam., alongside, mkd. ¼ on a partially healed face. (Record dist., 28 lks.) A pine, 34 ins. diam., bears N. 73° W., 28 lks. dist., with healed face. (Record dist., 38 lks.)**				
60		●	At the cor. point				
61		△	**Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd. T16N R2E ¼ S16 S21 1972 from which A fir, 16 ins. diam., bears N. 11° E., 126 lks. dist., mkd. ¼ S16 BT. A fir, 12 ins. diam., bears S. 10° W., 44 lks. dist., mkd. ¼ S21 BT. Bury orig. cor. stone alongside iron post.**				

PAGE SURVEY PLOT


N up



Lat 44.54222–44.54222 · Lon -116.21106–-116.21106

1 located symbols · 6 calls without a location

Numbers match the text table; only this scan page is shown.

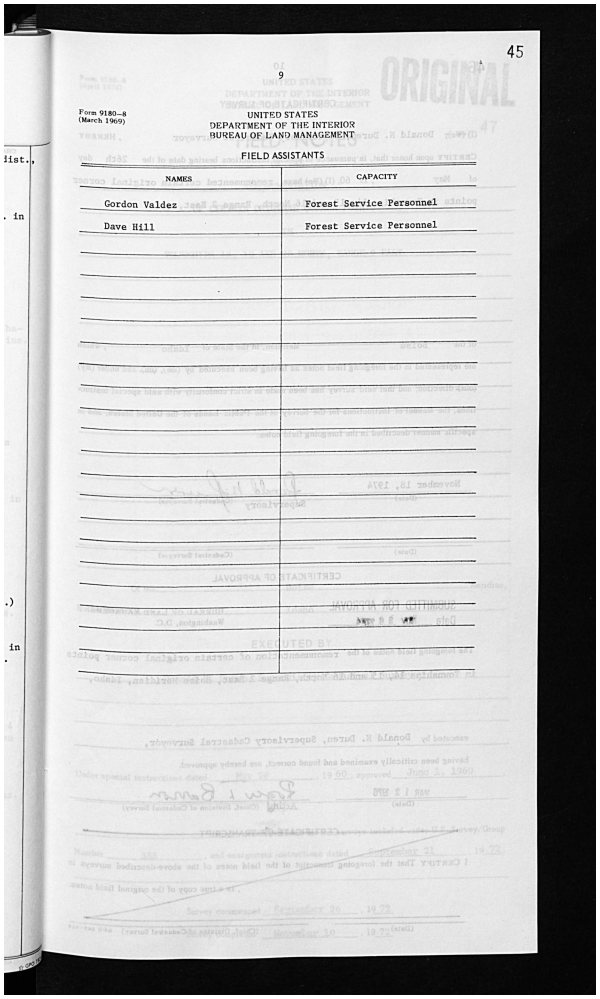

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
62		●	45 10 9 ORIGINAL Form 9180-8 (March 1969) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT FIELD ASSISTANTS NAMES CAPACITY Gordon Valdez Forest Service Personnel Dave Hill Forest Service Personnel				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

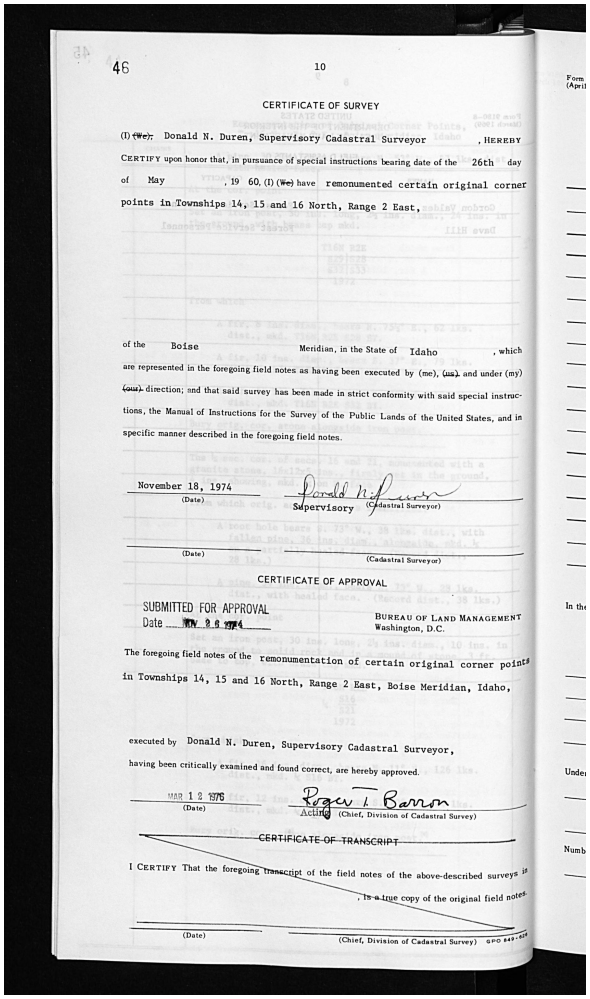

46 10

CERTIFICATE OF SURVEY

(I) ~~(We),~~ Donald N. Duren, Supervisory Cadastral Surveyor , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day of May , 19 60, (I) ~~(We)~~ have remonumented certain original corner points in Townships 14, 15 and 16 North, Range 2 East, of the Boise Meridian, in the State of Idaho , which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~, and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

November 18, 1974 (Date) Donald N. Duren Supervisory (Cadastral Surveyor)

(Date) (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date NOV 8 6 1974

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the remonumentation of certain original corner points in Townships 14, 15 and 16 North, Range 2 East, Boise Meridian, Idaho, executed by Donald N. Duren, Supervisory Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

MAR 1 2 1976 (Date) Roger I. Barron Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys is , is a true copy of the original field notes.

(Date) (Chief, Division of Cadastral Survey) GPO 849-[illegible]

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
63		▼	46 10 CERTIFICATE OF SURVEY (I) (We); Donald N. Duren, Supervisory Cadastral Surveyor , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day of May , 19 60, (I) (We) have remonumented certain original corner points in Townships 14, 15 and 16 North, Range 2 East, of the Boise Meridian, in the State of Idaho , which are represented in the foregoing field notes as having been executed by (me), (us), and under (my) (our) direction; and that said survey has been made in strict conformity with said special instruc- tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes. November 18, 1974 (Date) Donald N. Duren Supervisory (Cadastral Surveyor) (Date) (Cadastral Surveyor) CERTIFICATE OF APPROVAL SUBMITTED FOR APPROVAL BUREAU OF LAND MANAGEMENT Date NOV 8 6 1974 Washington, D.C. The foregoing field notes of the remonumentation of certain original corner points in Townships 14, 15 and 16 North, Range 2 East, Boise Meridian, Idaho, executed by Donald N. Duren, Supervisory Cadastral Surveyor, having been critically examined and found correct, are hereby approved. MAR 1 2 1976 (Date) Roger I. Barron Acting (Chief, Division of Cadastral Survey) ————————CERTIFICATE OF TRANSCRIPT———————— I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in , is a true copy of the original field notes. (Date) (Chief, Division of Cadastral Survey) GPO 849-[?]					

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Adams County, ID

0 total calls · 12 geo-located · 11 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

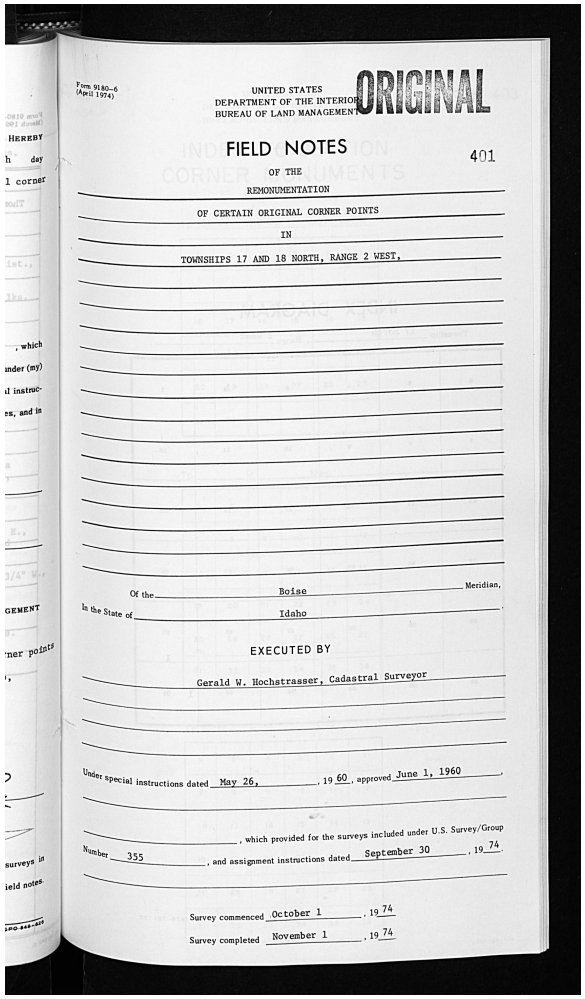

Form 9180–6
(April 1974)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

401

OF THE

REMONUMENTATION

OF CERTAIN ORIGINAL CORNER POINTS

IN

TOWNSHIPS 17 AND 18 NORTH, RANGE 2 WEST,

Of the Boise Meridian,

In the State of Idaho

EXECUTED BY

Gerald W. Hochstrasser, Cadastral Surveyor

Under special instructions dated May 26, , 19 60 , approved June 1, 1960 ,

, which provided for the surveys included under U.S. Survey/Group

Number 355 , and assignment instructions dated September 30 , 19 74.

Survey commenced October 1 , 19 74

Survey completed November 1 , 19 74

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	Form 9180-6 (April 1974) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT ORIGINAL FIELD NOTES 401 OF THE REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS IN TOWNSHIPS 17 AND 18 NORTH, RANGE 2 WEST, Of the Boise Meridian, In the State of Idaho EXECUTED BY Gerald W. Hochstrasser, Cadastral Surveyor Under special instructions dated May 26, , 19 60 , approved June 1, 1960 , , which provided for the surveys included under U.S. Survey/Group Number 355 , and assignment instructions dated September 30 , 19 74. Survey commenced October 1 , 19 74 Survey completed November 1 , 19 74				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

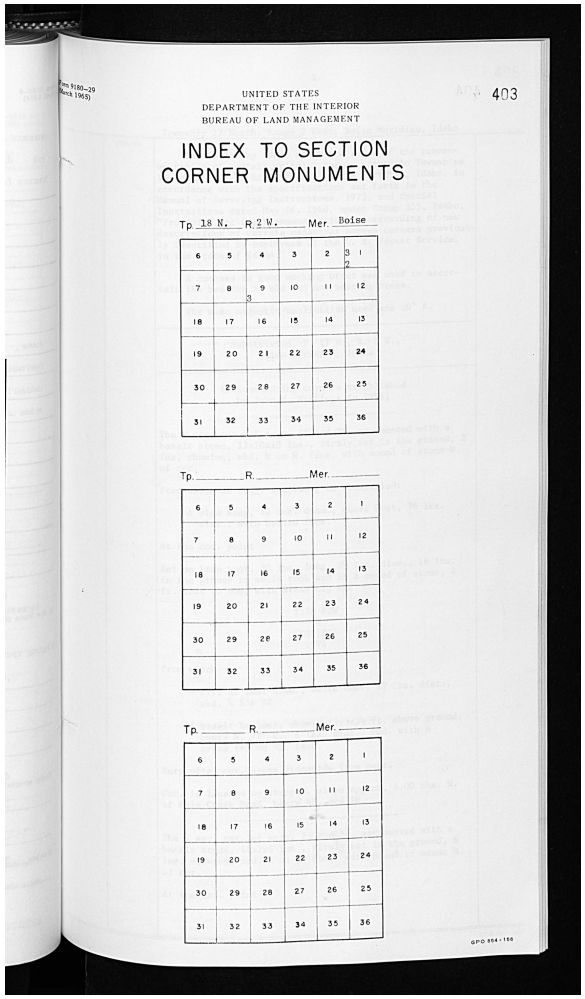

Form 9180-29 (March 1965)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

403

INDEX TO SECTION CORNER MONUMENTS

Tp. 18 N. R. 2 W. Mer. Boise

6	5	4	3	2	3 1	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Tp. ____ R. ____ Mer. ____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. ____ R. ____ Mer. ____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GPO 854-156


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
2		●	Form 9180-29 March 1965) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT INDEX TO SECTION CORNER MONUMENTS Tp. 18 N. R. 2 W. Mer. Boise 6 5 4 3 2 3 1 2 7 8 9 10 11 12 3 18 17 16 15 14 13 19 20 21 22 23 24 30 29 28 27 26 25 31 32 33 34 35 36 Tp. ___ R. ___ Mer. ___ 6 5 4 3 2 1 7 8 9 10 11 12 18 17 16 15 14 13 19 20 21 22 23 24 30 29 28 27 26 25 31 32 33 34 35 36 Tp. ___ R. ___ Mer. ___ 6 5 4 3 2 1 7 8 9 10 11 12 18 17 16 15 14 13 19 20 21 22 23 24 30 29 28 27 26 25 31 32 33 34 35 36 GPO 854-156				

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

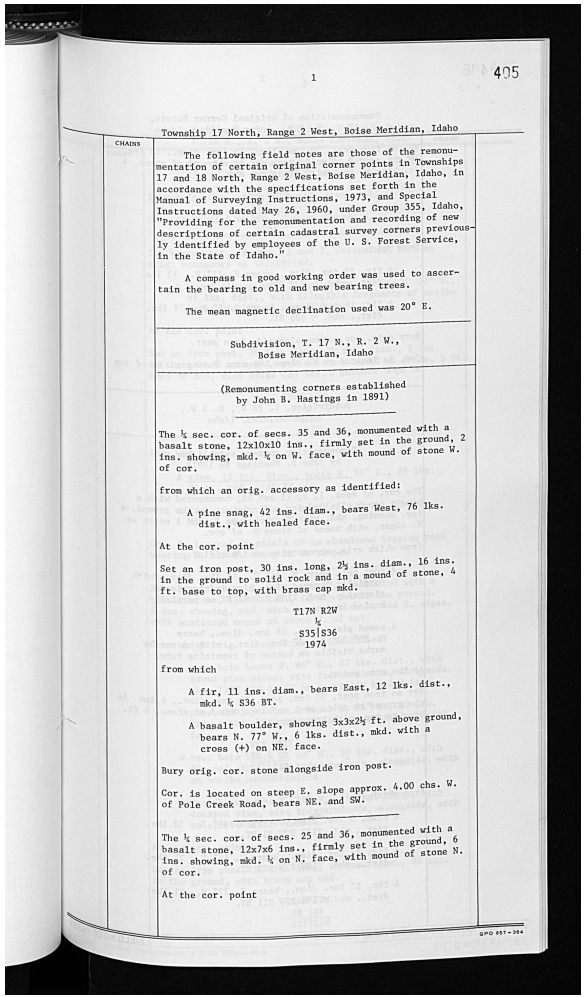

1 405

Township 17 North, Range 2 West, Boise Meridian, Idaho

CHAINS

The following field notes are those of the remonumentation of certain original corner points in Townships 17 and 18 North, Range 2 West, Boise Meridian, Idaho, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and Special Instructions dated May 26, 1960, under Group 355, Idaho, "Providing for the remonumentation and recording of new descriptions of certain cadastral survey corners previously identified by employees of the U. S. Forest Service, in the State of Idaho."

A compass in good working order was used to ascertain the bearing to old and new bearing trees.

The mean magnetic declination used was 20° E.

Subdivision, T. 17 N., R. 2 W., Boise Meridian, Idaho

(Remonumenting corners established by John B. Hastings in 1891)

The ¼ sec. cor. of secs. 35 and 36, monumented with a basalt stone, 12x10x10 ins., firmly set in the ground, 2 ins. showing, mkd. ¼ on W. face, with mound of stone W. of cor.

from which an orig. accessory as identified:

A pine snag, 42 ins. diam., bears West, 76 lks. dist., with healed face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17N R2W
¼
S35|S36
1974

from which

A fir, 11 ins. diam., bears East, 12 lks. dist., mkd. ¼ S36 BT.

A basalt boulder, showing 3x3x2½ ft. above ground, bears N. 77° W., 6 lks. dist., mkd. with a cross (+) on NE. face.

Bury orig. cor. stone alongside iron post.

Cor. is located on steep E. slope approx. 4.00 chs. W. of Pole Creek Road, bears NE. and SW.

The ¼ sec. cor. of secs. 25 and 36, monumented with a basalt stone, 12x7x6 ins., firmly set in the ground, 6 ins. showing, mkd. ¼ on N. face, with mound of stone N. of cor.

At the cor. point

GPO 857-364


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 3 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
3			Township 17 North, Range 2 West, Boise Meridian, Idaho				
4		▲	**Township Corner (NW) · The following field notes are those of the remonumentation of certain original corner points in Townships 17 and 18 North, Range 2 West, Boise Meridian, Idaho, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and Special Instructions dated May 26, 1960, under Group 355, Idaho, "Providing for the remonumentation and recording of new descriptions of certain cadastral survey corners previously identified by employees of the U. S. Forest Service, in the State of Idaho."**				100100
5			A compass in good working order was used to ascertain the bearing to old and new bearing trees.				
6			The mean magnetic declination used was 20° E.				
7			Subdivision, T. 17 N., R. 2 W., Boise Meridian, Idaho				
8			(Remonumenting corners established by John B. Hastings in 1891)				
9		▲	**Cor. Secs. 35-36 · The ¼ sec. cor. of secs. 35 and 36, monumented with a basalt stone, 12x10x10 ins., firmly set in the ground, 2 ins. showing, mkd. ¼ on W. face, with mound of stone W. of cor. from which an orig. accessory as identified: A pine snag, 42 ins. diam., bears West, 76 lks. dist., with healed face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd. T17N R2W ¼ S35|S36 1974 from which A fir, 11 ins. diam., bears East, 12 lks. dist., mkd. ¼ S36 BT. A basalt boulder, showing 3x3x2½ ft. above ground, bears N. 77° W., 6 lks. dist., mkd. with a cross (+) on NE. face. Bury orig. cor. stone alongside iron post. Cor. is located on steep E. slope approx. 4.00 chs. W. of Pole Creek Road, bears NE. and SW.**				600100
10		▲	**Cor. Secs. 25-36 · The ¼ sec. cor. of secs. 25 and 36, monumented with a basalt stone, 12x7x6 ins., firmly set in the ground, 6 ins. showing, mkd. ¼ on N. face, with mound of stone N. of cor. At the cor. point**				700200

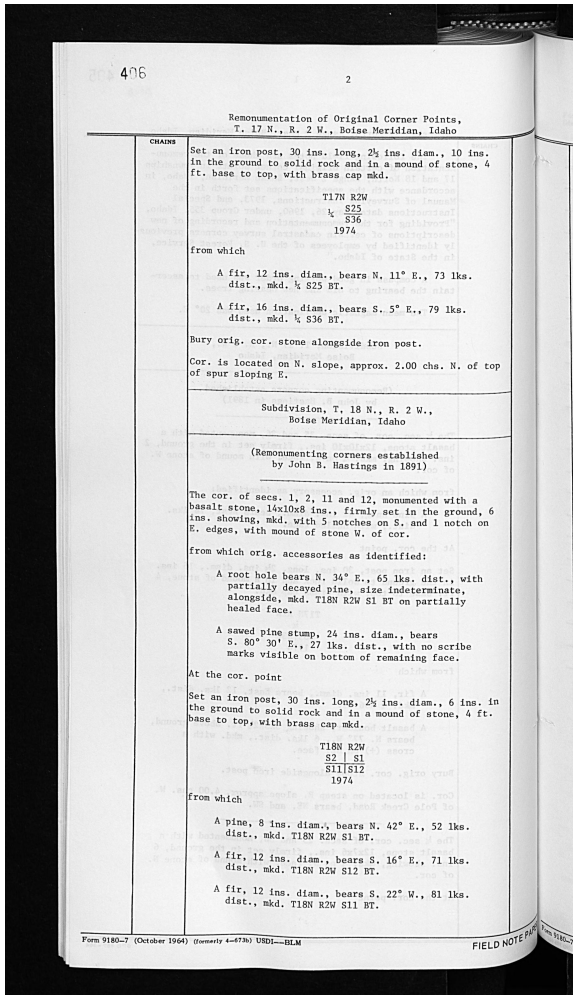

406

2

Remonumentation of Original Corner Points,
T. 17 N., R. 2 W., Boise Meridian, Idaho

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17N R2W
¼ S25 / S36
1974

from which

A fir, 12 ins. diam., bears N. 11° E., 73 lks. dist., mkd. ¼ S25 BT.

A fir, 16 ins. diam., bears S. 5° E., 79 lks. dist., mkd. ¼ S36 BT.

Bury orig. cor. stone alongside iron post.

Cor. is located on N. slope, approx. 2.00 chs. N. of top of spur sloping E.

Subdivision, T. 18 N., R. 2 W.,
Boise Meridian, Idaho

(Remonumenting corners established by John B. Hastings in 1891)

The cor. of secs. 1, 2, 11 and 12, monumented with a basalt stone, 14x10x8 ins., firmly set in the ground, 6 ins. showing, mkd. with 5 notches on S. and 1 notch on E. edges, with mound of stone W. of cor.

from which orig. accessories as identified:

A root hole bears N. 34° E., 65 lks. dist., with partially decayed pine, size indeterminate, alongside, mkd. T18N R2W S1 BT on partially healed face.

A sawed pine stump, 24 ins. diam., bears S. 80° 30' E., 27 lks. dist., with no scribe marks visible on bottom of remaining face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18N R2W
S2 | S1
S11 | S12
1974

from which

A pine, 8 ins. diam., bears N. 42° E., 52 lks. dist., mkd. T18N R2W S1 BT.

A fir, 12 ins. diam., bears S. 16° E., 71 lks. dist., mkd. T18N R2W S12 BT.

A fir, 12 ins. diam., bears S. 22° W., 81 lks. dist., mkd. T18N R2W S11 BT.

Form 9180–7 (October 1964) (formerly 4–673b) USDI—BLM

FIELD NOTE

PAGE SURVEY PLOT


N up

No reliable locations available for this page.

0 located symbols · 4 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
11		▲	**Remonumentation of Original Corner Points, T. 17 N., R. 2 W., Boise Meridian, Idaho**				
12		▲	**Cor. Secs. 25-36 · Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd. T17N R2W ¼ S25 S36 1974 from which A fir, 12 ins. diam., bears N. 11° E., 73 lks. dist., mkd. ¼ S25 BT. A fir, 16 ins. diam., bears S. 5° E., 79 lks. dist., mkd. ¼ S36 BT. Bury orig. cor. stone alongside iron post. Cor. is located on N. slope, approx. 2.00 chs. N. of top of spur sloping E.**				700200
13			Subdivision, T. 18 N., R. 2 W., Boise Meridian, Idaho				
14			(Remonumenting corners established by John B. Hastings in 1891)				
15		▲	**Cor. Secs. 1-2-11-12 · The cor. of secs. 1, 2, 11 and 12, monumented with a basalt stone, 14x10x8 ins., firmly set in the ground, 6 ins. showing, mkd. with 5 notches on S. and 1 notch on E. edges, with mound of stone W. of cor. from which orig. accessories as identified: A root hole bears N. 34° E., 65 lks. dist., with partially decayed pine, size indeterminate, alongside, mkd. T18N R2W S1 BT on partially healed face. A sawed pine stump, 24 ins. diam., bears S. 80° 30' E., 27 lks. dist., with no scribe marks visible on bottom of remaining face.**				600600
16		▲	**Cor. Secs. 1-2 · At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd. T18N R2W S2 | S1 S11 | S12 1974 from which A pine, 8 ins. diam., bears N. 42° E., 52 lks. dist., mkd. T18N R2W S1 BT. A fir, 12 ins. diam., bears S. 16° E., 71 lks. dist., mkd. T18N R2W S12 BT. A fir, 12 ins. diam., bears S. 22° W., 81 lks. dist., mkd. T18N R2W S11 BT.**				600700

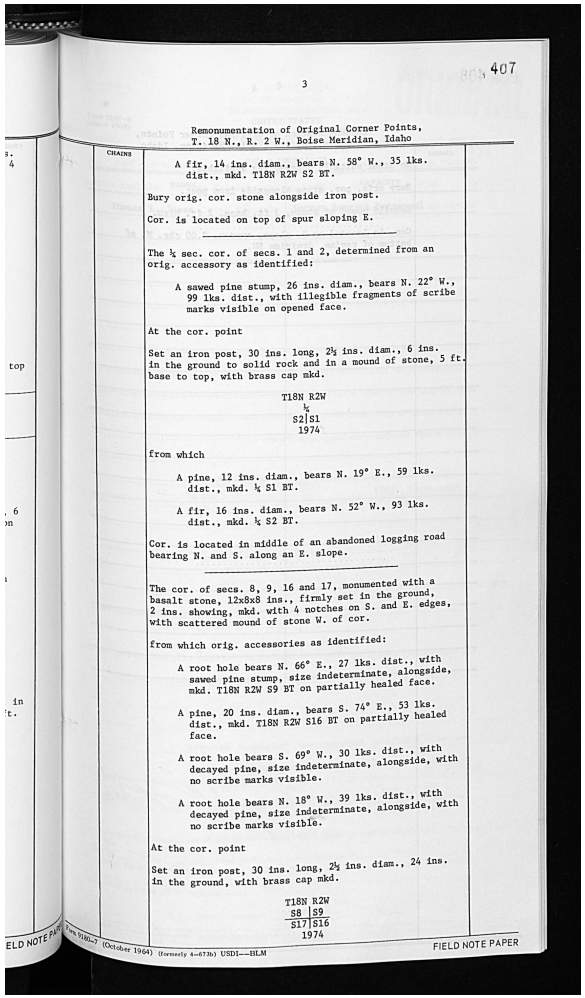

3

407

Remonumentation of Original Corner Points,
T. 18 N., R. 2 W., Boise Meridian, Idaho

CHAINS

A fir, 14 ins. diam., bears N. 58° W., 35 lks. dist., mkd. T18N R2W S2 BT.

Bury orig. cor. stone alongside iron post.

Cor. is located on top of spur sloping E.

The ¼ sec. cor. of secs. 1 and 2, determined from an orig. accessory as identified:

A sawed pine stump, 26 ins. diam., bears N. 22° W., 99 lks. dist., with illegible fragments of scribe marks visible on opened face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T18N R2W
¼
S2|S1
1974

from which

A pine, 12 ins. diam., bears N. 19° E., 59 lks. dist., mkd. ¼ S1 BT.

A fir, 16 ins. diam., bears N. 52° W., 93 lks. dist., mkd. ¼ S2 BT.

Cor. is located in middle of an abandoned logging road bearing N. and S. along an E. slope.

The cor. of secs. 8, 9, 16 and 17, monumented with a basalt stone, 12x8x8 ins., firmly set in the ground, 2 ins. showing, mkd. with 4 notches on S. and E. edges, with scattered mound of stone W. of cor.

from which orig. accessories as identified:

A root hole bears N. 66° E., 27 lks. dist., with sawed pine stump, size indeterminate, alongside, mkd. T18N R2W S9 BT on partially healed face.

A pine, 20 ins. diam., bears S. 74° E., 53 lks. dist., mkd. T18N R2W S16 BT on partially healed face.

A root hole bears S. 69° W., 30 lks. dist., with decayed pine, size indeterminate, alongside, with no scribe marks visible.

A root hole bears N. 18° W., 39 lks. dist., with decayed pine, size indeterminate, alongside, with no scribe marks visible.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T18N R2W
S8 | S9
S17 | S16
1974

(October 1964) (formerly 4-673b) USDI—BLM

FIELD NOTE PAPER


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
17		▲	**Remonumentation of Original Corner Points, T. 18 N., R. 2 W., Boise Meridian, Idaho**				
18		●	A fir, 14 ins. diam., bears N. 58° W., 35 lks. dist., mkd. T18N R2W S2 BT. Bury orig. cor. stone alongside iron post. Cor. is located on top of spur sloping E.				
19		▲	**The ¼ sec. cor. of secs. 1 and 2, determined from an orig. accessory as identified: A sawed pine stump, 26 ins. diam., bears N. 22° W., 99 lks. dist., with illegible fragments of scribe marks visible on opened face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd. T18N R2W ¼ S2|S1 1974 from which A pine, 12 ins. diam., bears N. 19° E., 59 lks. dist., mkd. ¼ S1 BT. A fir, 16 ins. diam., bears N. 52° W., 93 lks. dist., mkd. ¼ S2 BT. Cor. is located in middle of an abandoned logging road bearing N. and S. along an E. slope.**				
20		▲	**Cor. Secs. 8-9-16-17 · The cor. of secs. 8, 9, 16 and 17, monumented with a basalt stone, 12x8x8 ins., firmly set in the ground, 2 ins. showing, mkd. with 4 notches on S. and E. edges, with scattered mound of stone W. of cor. from which orig. accessories as identified: A root hole bears N. 66° E., 27 lks. dist., with sawed pine stump, size indeterminate, alongside, mkd. T18N R2W S9 BT on partially healed face. A pine, 20 ins. diam., bears S. 74° E., 53 lks. dist., mkd. T18N R2W S16 BT on partially healed face. A root hole bears S. 69° W., 30 lks. dist., with decayed pine, size indeterminate, alongside, with no scribe marks visible. A root hole bears N. 18° W., 39 lks. dist., with decayed pine, size indeterminate, alongside, with no scribe marks visible. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T18N R2W S8 |S9 S17|S16 1974**				**300500**

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 4 calls without a location

Numbers match the text table; only this scan page is shown.

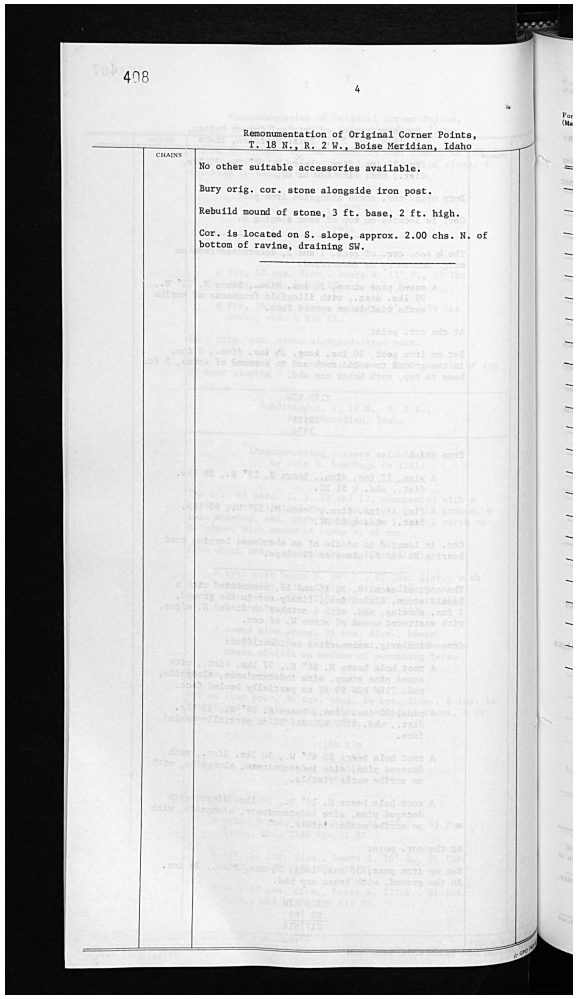

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
21		▲	**Remonumentation of Original Corner Points, T. 18 N., R. 2 W., Boise Meridian, Idaho**				
22		●	No other suitable accessories available.				
23		●	Bury orig. cor. stone alongside iron post.				
24		●	Rebuild mound of stone, 3 ft. base, 2 ft. high.				
25		▼	Cor. is located on S. slope, approx. 2.00 chs. N. of bottom of ravine, draining SW.				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 5 calls without a location

Numbers match the text table; only this scan page is shown.

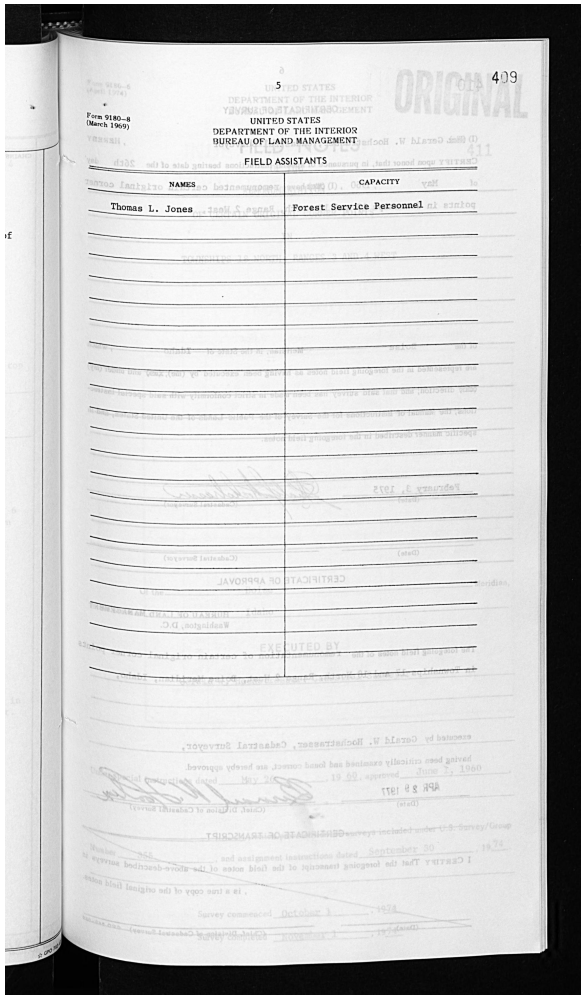


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
26		●	Form 9180-4 (July 1964) Form 9180-8 (March 1969) 5 UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT FIELD ASSISTANTS NAMES CAPACITY Thomas L. Jones Forest Service Personnel 409				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

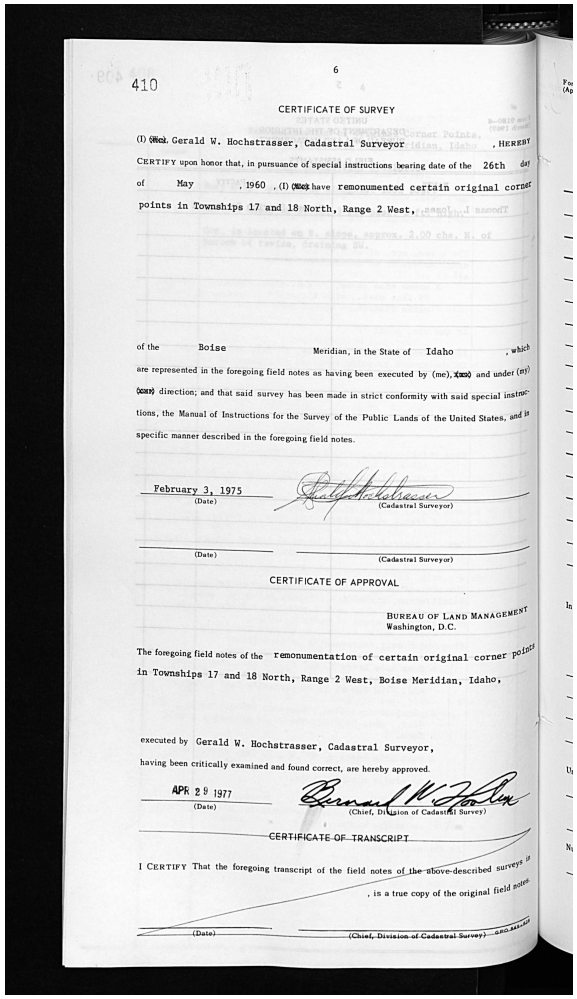

410 6

CERTIFICATE OF SURVEY

(I) (We) Gerald W. Hochstrasser, Cadastral Surveyor , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day of May , 1960 , (I) (We) have remonumented certain original corner points in Townships 17 and 18 North, Range 2 West, of the Boise Meridian, in the State of Idaho , which are represented in the foregoing field notes as having been executed by (me), (us) and under (my) (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 3, 1975 (Date) (Cadastral Surveyor)

(Date) (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of certain original corner points in Townships 17 and 18 North, Range 2 West, Boise Meridian, Idaho, executed by Gerald W. Hochstrasser, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

APR 29 1977 (Date) (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys is , is a true copy of the original field notes

(Date) (Chief, Division of Cadastral Survey)

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
27		▼	410 6 CERTIFICATE OF SURVEY (I) (We) Gerald W. Hochstrasser, Cadastral Surveyor , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day of May , 1960 , (I) (We) have remonumented certain original corner points in Townships 17 and 18 North, Range 2 West, of the Boise Meridian, in the State of Idaho , which are represented in the foregoing field notes as having been executed by (me), (us) and under (my) (our) direction; and that said survey has been made in strict conformity with said special instruc- tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes. February 3, 1975 (Date) (Cadastral Surveyor) (Date) (Cadastral Surveyor) CERTIFICATE OF APPROVAL BUREAU OF LAND MANAGEMENT Washington, D.C. The foregoing field notes of the remonumentation of certain original corner points in Townships 17 and 18 North, Range 2 West, Boise Meridian, Idaho, executed by Gerald W. Hochstrasser, Cadastral Surveyor, having been critically examined and found correct, are hereby approved. APR 29 1977 (Date) (Chief, Division of Cadastral Survey) CERTIFICATE OF TRANSCRIPT I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in , is a true copy of the original field notes (Date) (Chief, Division of Cadastral Survey)				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Adams County, ID

0 total calls · 0 geo-located · 0 with elevation

TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.