
T45N R3W

ID · Benewah County · 3 document(s) · Generated 11/2/2026

197 calls · 0 geo-located · 0 terrain flags · 0 verifications

Source review: conflicting or unverified locations are withheld. Original scans and transcriptions are preserved; missing positions are not estimated.

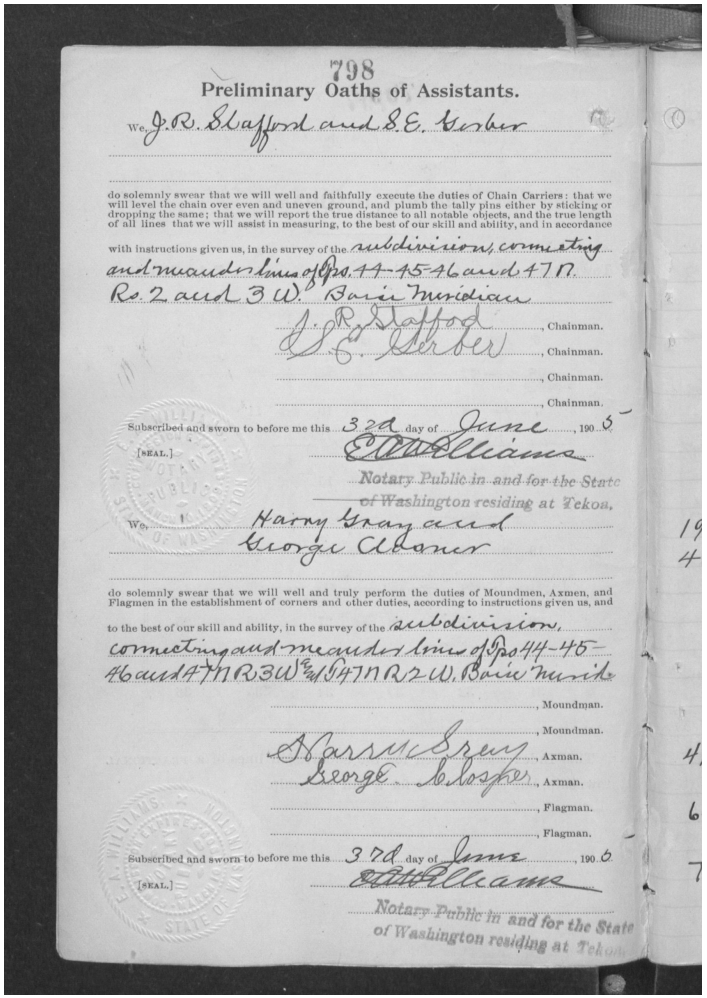

798

Preliminary Oaths of Assistants.

We J.R. Shafford and S.E. Gerber

do solemnly swear that we will well and faithfully execute the duties of Chain Carriers: that we will level the chain over even and uneven ground, and plumb the tally pins either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of the subdivisions, connecting and meander lines of Tps. 44-45-46 and 47 N. Rs. 2 and 3 W. Boise Meridian

J.R. Shafford, Chainman.

S.E. Gerber, Chainman.

, Chainman.

, Chainman.

Subscribed and sworn to before me this 32d day of June, 1905

[SEAL.] E.T. Williams

Notary Public in and for the State of Washington residing at Tekoa.

We Harry Gray and George Closner

do solemnly swear that we will well and truly perform the duties of Moundmen, Axmen, and Flagmen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the subdivision, connecting and meander lines of Tps 44-45-46 and 47 N R 3 W & 1547 N R 2 W. Boise Meridian

, Moundman.

, Moundman.

Harry Gray, Axman.

George Closner, Axman.

, Flagman.

, Flagman.

Subscribed and sworn to before me this 37d day of June, 1906

[SEAL.] E.T. Williams

Notary Public in and for the State of Washington residing at Tekoa


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		▼	798 Preliminary Oaths of Assistants. We, J.R. Shafford and S.E. Gerber do solemnly swear that we will well and faithfully execute the duties of Chain Carriers: that we will level the chain over even and uneven ground, and plumb the tally pins either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of the subdivisions, connecting and meander lines of Tps. 44, 45, 46 and 47 N. Rs. 2 and 3 W. Boise Meridian J.R. Shafford, Chainman. S.E. Gerber, Chainman. , Chainman. , Chainman. Subscribed and sworn to before me this 32d day of June, 190 5 [SEAL.] E.T. Williams Notary Public in and for the State of Washington residing at Tekoa. We, Harry Gray and George Closner do solemnly swear that we will well and truly perform the duties of Moundmen, Axmen, and Flagmen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the subdivision, connecting and meander lines of Tps. 44, 45, 46 and 47 N. R. 3 W. & 1547 N. R. 2 W. Boise Meridian , Moundman. , Moundman. Harry Gray, Axman. George Closner, Axman. , Flagman. , Flagman. Subscribed and sworn to before me this 37d day of June, 190 6 [SEAL.] E.T. Williams Notary Public in and for the State of Washington residing at Tekoa.				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

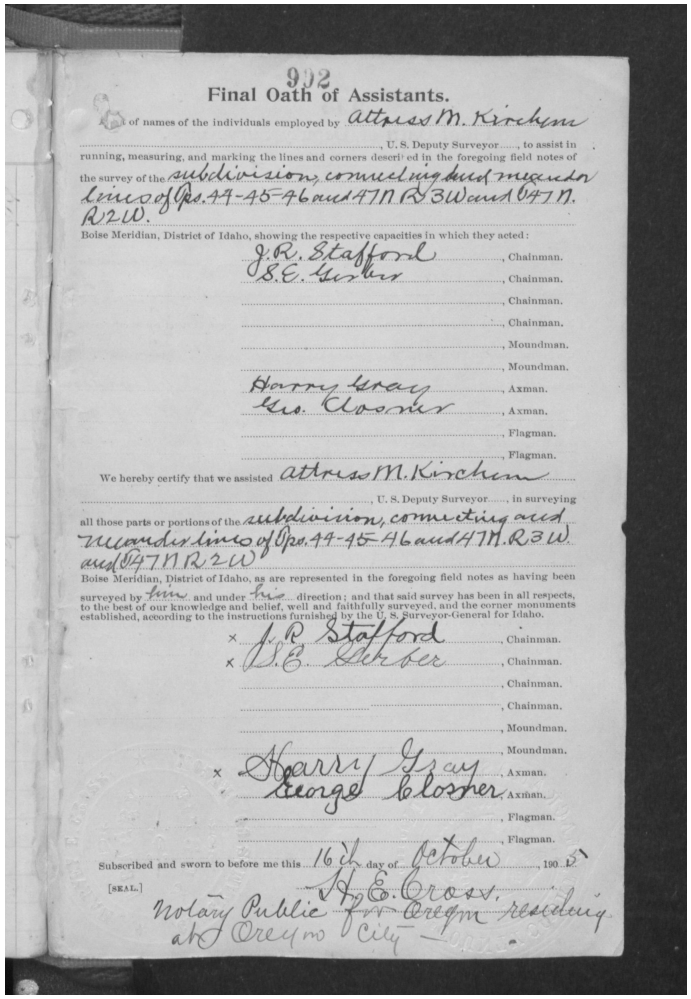

992

Final Oath of Assistants.

[A] of names of the individuals employed by attress M. Kirchem

....., U. S. Deputy Surveyor....., to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of the subdivision, connecting and meander lines of Tps. 44-45-46 and 47N. R 3W and 047N. R2W.

Boise Meridian, District of Idaho, showing the respective capacities in which they acted:

J. R. Stafford, Chainman.
S. E. Gerber, Chainman.
....., Chainman.
....., Chainman.
....., Moundman.
....., Moundman.
Harry Gray, Axman.
Geo. Closner, Axman.
....., Flagman.
....., Flagman.

We hereby certify that we assisted attress M. Kirchem ..... U. S. Deputy Surveyor....., in surveying all those parts or portions of the subdivision, connecting and meander lines of Tps. 44-45-46 and 47N. R 3W. and 047N. R 2W Boise Meridian, District of Idaho, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor-General for Idaho.

x J. R. Stafford, Chainman.
x S. E. Gerber, Chainman.
....., Chainman.
....., Chainman.
....., Moundman.
....., Moundman.
x Harry Gray, Axman.
x George Closner, Axman.
....., Flagman.
....., Flagman.

Subscribed and sworn to before me this 16th day of October, 190[illegible]

[SEAL.] H. E. Cross,

Notary Public for Oregon residing at Oregon City


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
2		●	992 Final Oath of Assistants. [A] of names of the individuals employed by attress M. Kirchem , U. S. Deputy Surveyor....., to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of the subdivision, connecting and meander lines of Tps. 44-45-46 and 47N. R 3W and 047N. R2W. Boise Meridian, District of Idaho, showing the respective capacities in which they acted: J. R. Stafford , Chainman. S. E. Gerber , Chainman. , Chainman. , Chainman. , Moundman. , Moundman. Harry Gray , Axman. Geo. Closner , Axman. , Flagman. , Flagman. We hereby certify that we assisted attress M. Kirchem , U. S. Deputy Surveyor....., in surveying all those parts or portions of the subdivision, connecting and meander lines of Tps. 44-45-46 and 47N. R 3W and 047N. R 2W Boise Meridian, District of Idaho, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor-General for Idaho. x J. R. Stafford , Chainman. x S. E. Gerber , Chainman. , Chainman. , Chainman. , Moundman. , Moundman. x Harry Gray , Axman. x George Closner , Axman. , Flagman. , Flagman. Subscribed and sworn to before me this 16th day of October, 190[5?] [SEAL.] H. E. Cross, Notary Public for Oregon residing at Oregon City				

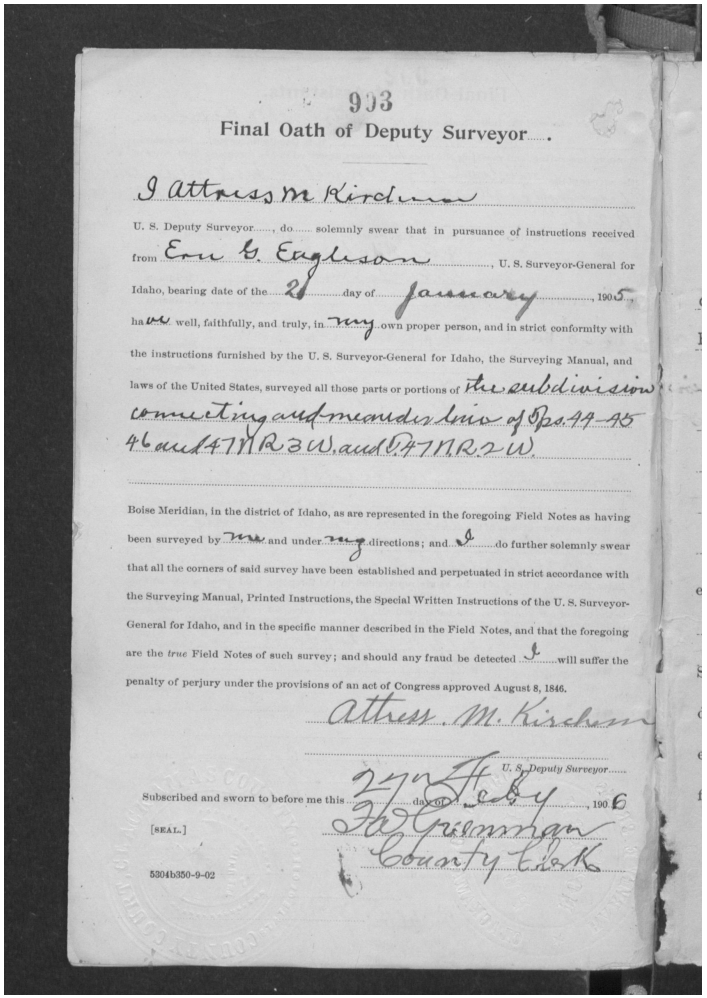

993

Final Oath of Deputy Surveyor.....

I attress M Kirchner

U. S. Deputy Surveyor....., do..... solemnly swear that in pursuance of instructions received from Ern G. Engleson ....., U. S. Surveyor-General for Idaho, bearing date of the 21 day of January ....., 1905, have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor-General for Idaho, the Surveying Manual, and laws of the United States, surveyed all those parts or portions of the subdivision connecting and meander lines of Tps. 44-45 46 and 47 N R 3 W. and D 47 N R 2 W.

Boise Meridian, in the district of Idaho, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, Printed Instructions, the Special Written Instructions of the U. S. Surveyor-General for Idaho, and in the specific manner described in the Field Notes, and that the foregoing are the *true* Field Notes of such survey; and should any fraud be detected I will suffer the penalty of perjury under the provisions of an act of Congress approved August 8, 1846.

attress M. Kirchner

U. S. Deputy Surveyor.....

Subscribed and sworn to before me this 27th day of Feby, 1906

[SEAL.]

Fa Greenman
County Clerk

5304b350-9-02

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
3		●	993 Final Oath of Deputy Surveyor..... I attress M. Kirchner U. S. Deputy Surveyor....., do..... solemnly swear that in pursuance of instructions received from Ern G. Engleson ....., U. S. Surveyor-General for Idaho, bearing date of the....21.....day of.....January....., 1905, have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor-General for Idaho, the Surveying Manual, and laws of the United States, surveyed all those parts or portions of the subdivision connecting and meander lines of Tps. 44, 45, 46 and 47N R 3 W. and D 47N R 2 W. Boise Meridian, in the district of Idaho, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, Printed Instructions, the Special Written Instructions of the U. S. Surveyor- General for Idaho, and in the specific manner described in the Field Notes, and that the foregoing are the true Field Notes of such survey; and should any fraud be detected I will suffer the penalty of perjury under the provisions of an act of Congress approved August 8, 1846. attress M. Kirchner .....U. S. Deputy Surveyor..... Subscribed and sworn to before me this.....27th.....day of Feby....., 1906 [SEAL.] Fa Greenman County Clerk 5304b350-9-02				

PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Benewah County, ID

0 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE

Run Geolocate on this document to generate the elevation profile.

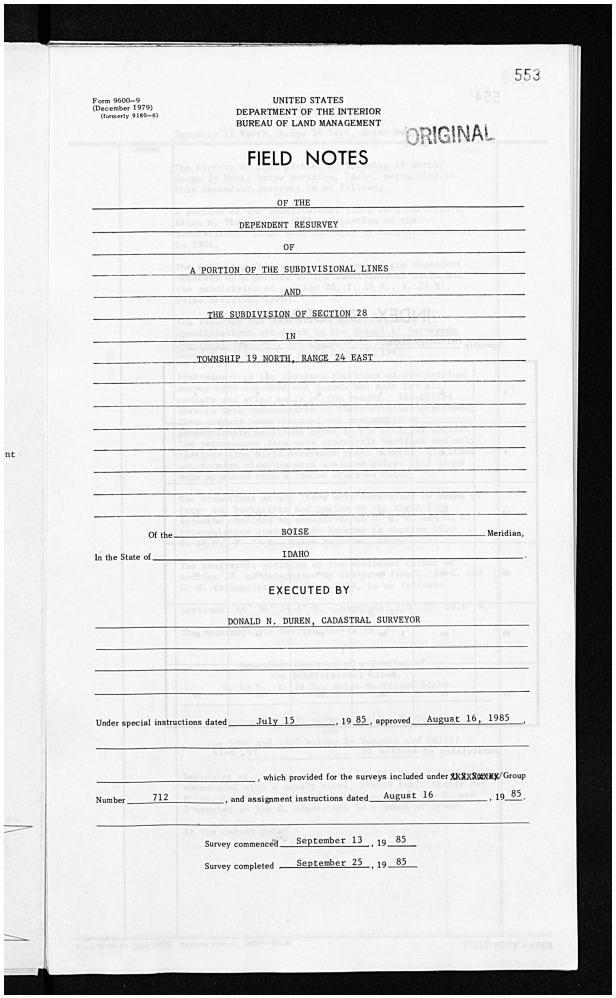

553

Form 9600–9
(December 1979)
(formerly 9180–6)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SUBDIVISIONAL LINES

AND

THE SUBDIVISION OF SECTION 28

IN

TOWNSHIP 19 NORTH, RANGE 24 EAST

Of the BOISE Meridian,

In the State of IDAHO.

EXECUTED BY

DONALD N. DUREN, CADASTRAL SURVEYOR

Under special instructions dated July 15, 19 85, approved August 16, 1985,

, which provided for the surveys included under XKXSXXXXX/Group

Number 712, and assignment instructions dated August 16, 19 85.

Survey commenced September 13, 19 85

Survey completed September 25, 19 85

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	553 Form 9600-9 (December 1979) (formerly 9180-6) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT ORIGINAL FIELD NOTES OF THE DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES AND THE SUBDIVISION OF SECTION 28 IN TOWNSHIP 19 NORTH, RANGE 24 EAST Of the BOISE Meridian, In the State of IDAHO . EXECUTED BY DONALD N. DUREN, CADASTRAL SURVEYOR Under special instructions dated July 15 , 19 85 , approved August 16, 1985 , , which provided for the surveys included under XKXSXXXXX/Group Number 712 , and assignment instructions dated August 16 , 19 85 . Survey commenced September 13 , 19 85 Survey completed September 25 , 19 85				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

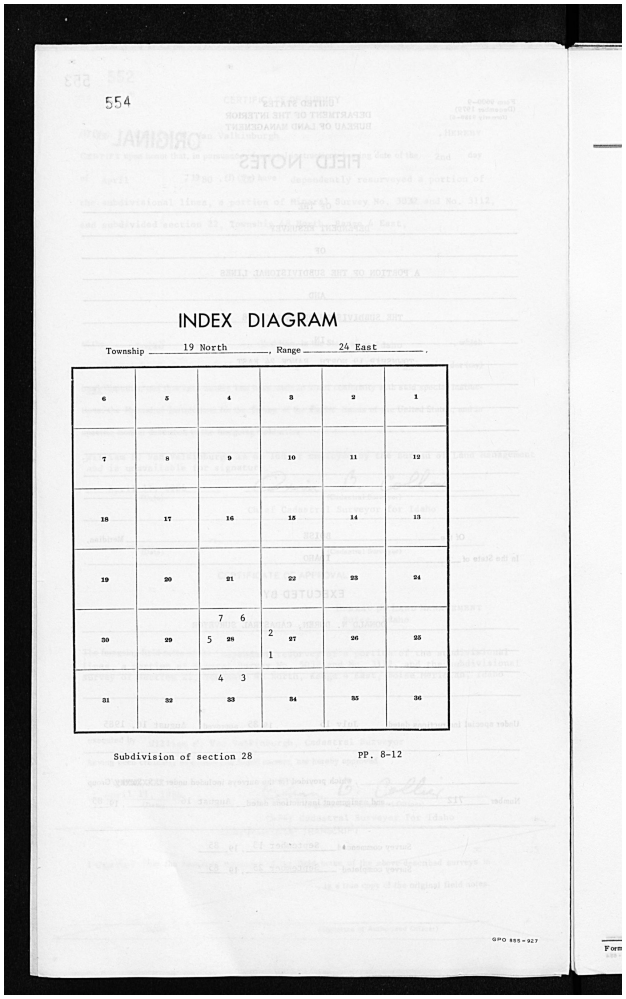


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
2		●	554 INDEX DIAGRAM Township 19 North , Range 24 East . | 6 | 5 | 4 | 3 | 2 | 1 | | 7 | 8 | 9 | 10 | 11 | 12 | | 18 | 17 | 16 | 15 | 14 | 13 | | 19 | 20 | 21 | 22 | 23 | 24 | | 30 | 29 | 5 28 | 2 27 | 26 | 25 | | | | 7 6 | | | | | | | 4 3 | 1 | | | | 31 | 32 | 33 | 34 | 35 | 36 | Subdivision of section 28 PP. 8-12 GPO 885-927				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

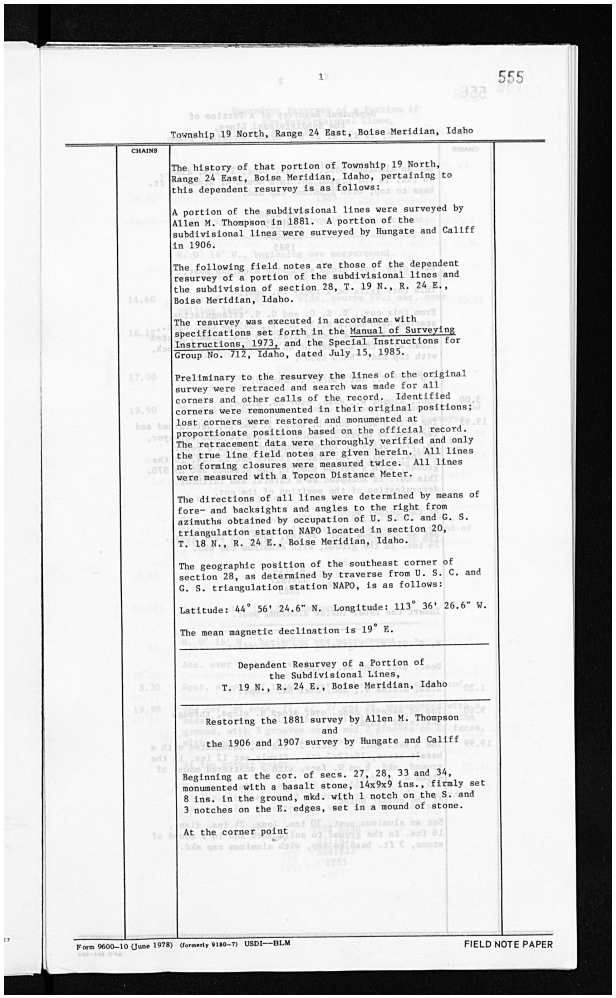

1 555

Township 19 North, Range 24 East, Boise Meridian, Idaho

CHAINS

The history of that portion of Township 19 North, Range 24 East, Boise Meridian, Idaho, pertaining to this dependent resurvey is as follows:

A portion of the subdivisional lines were surveyed by Allen M. Thompson in 1881. A portion of the subdivisional lines were surveyed by Hungate and Califf in 1906.

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and the subdivision of section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho.

The resurvey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 712, Idaho, dated July 15, 1985.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the official record. The retracement data were thoroughly verified and only the true line field notes are given herein. All lines not forming closures were measured twice. All lines were measured with a Topcon Distance Meter.

The directions of all lines were determined by means of fore- and backsights and angles to the right from azimuths obtained by occupation of U. S. C. and G. S. triangulation station NAPO located in section 20, T. 18 N., R. 24 E., Boise Meridian, Idaho.

The geographic position of the southeast corner of section 28, as determined by traverse from U. S. C. and G. S. triangulation station NAPO, is as follows:

Latitude: 44° 56' 24.6" N. Longitude: 113° 36' 26.6" W.

The mean magnetic declination is 19° E.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho

Restoring the 1881 survey by Allen M. Thompson and the 1906 and 1907 survey by Hungate and Califf

Beginning at the cor. of secs. 27, 28, 33 and 34, monumented with a basalt stone, 14x9x9 ins., firmly set 8 ins. in the ground, mkd. with 1 notch on the S. and 3 notches on the E. edges, set in a mound of stone.

At the corner point

Form 9600-10 (June 1978) (formerly 9180-7) USDI---BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
3		●	1 555 Dependent Resurvey of a Portion of the Subdivisional Lines, Township 19 North, Range 24 East, Boise Meridian, Idaho CHAINS The history of that portion of Township 19 North, Range 24 East, Boise Meridian, Idaho, pertaining to this dependent resurvey is as follows: A portion of the subdivisional lines were surveyed by Allen M. Thompson in 1881. A portion of the subdivisional lines were surveyed by Hungate and Califf in 1906. The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and the subdivision of section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho. The resurvey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 712, Idaho, dated July 15, 1985. Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the official record. The retracement data were thoroughly verified and only the true line field notes are given herein. All lines not forming closures were measured twice. All lines were measured with a Topcon Distance Meter. The directions of all lines were determined by means of fore- and backsights and angles to the right from azimuths obtained by occupation of U. S. C. and G. S. triangulation station NAPO located in section 20, T. 18 N., R. 24 E., Boise Meridian, Idaho. The geographic position of the southeast corner of section 28, as determined by traverse from U. S. C. and G. S. triangulation station NAPO, is as follows: Latitude: 44° 56' 24.6" N. Longitude: 113° 36' 26.6" W. The mean magnetic declination is 19° E. Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho Restoring the 1881 survey by Allen M. Thompson and the 1906 and 1907 survey by Hungate and Califf Beginning at the cor. of secs. 27, 28, 33 and 34, monumented with a basalt stone, 14x9x9 ins., firmly set 8 ins. in the ground, mkd. with 1 notch on the S. and 3 notches on the E. edges, set in a mound of stone. At the corner point Form 9600-10 (June 1978) (formerly 9180-7) USDI--BLM FIELD NOTE PAPER				

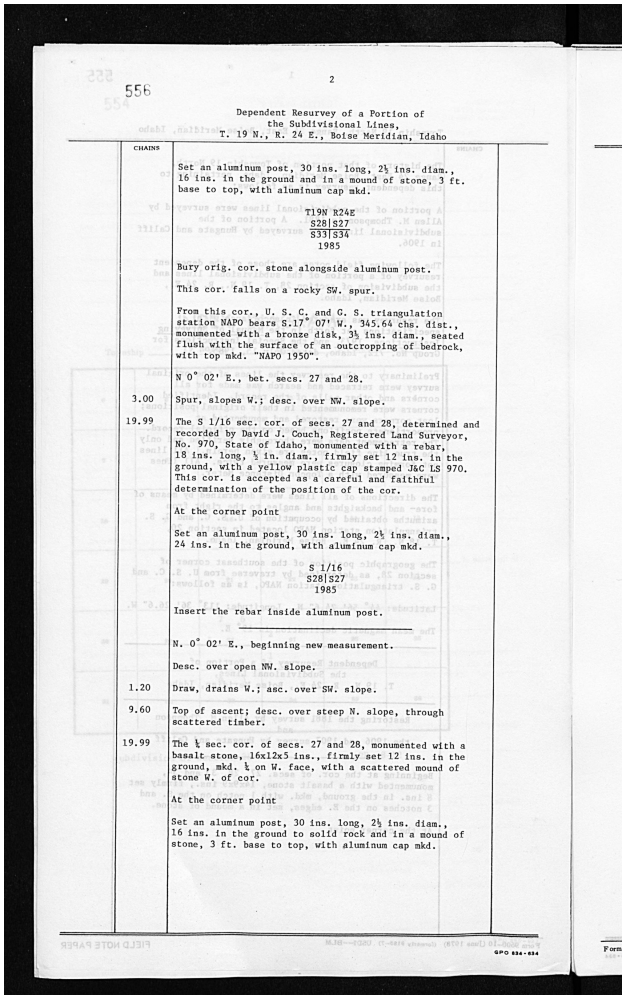

556

2

Dependent Resurvey of a Portion of
the Subdivisional Lines,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS

Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground and in a mound of stone, 3 ft. base to top, with aluminum cap mkd.

T19N R24E
S28|S27
S33|S34
1985

Bury orig. cor. stone alongside aluminum post.

This cor. falls on a rocky SW. spur.

From this cor., U. S. C. and G. S. triangulation station NAPO bears S.17° 07' W., 345.64 chs. dist., monumented with a bronze disk, 3½ ins. diam., seated flush with the surface of an outcropping of bedrock, with top mkd. "NAPO 1950".

N 0° 02' E., bet. secs. 27 and 28.

3.00 Spur, slopes W.; desc. over NW. slope.

19.99 The S 1/16 sec. cor. of secs. 27 and 28, determined and recorded by David J. Couch, Registered Land Surveyor, No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap stamped J&C LS 970. This cor. is accepted as a careful and faithful determination of the position of the cor.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

S 1/16
S28|S27
1985

Insert the rebar inside aluminum post.

N. 0° 02' E., beginning new measurement.

Desc. over open NW. slope.

1.20 Draw, drains W.; asc. over SW. slope.

9.60 Top of ascent; desc. over steep N. slope, through scattered timber.

19.99 The ¼ sec. cor. of secs. 27 and 28, monumented with a basalt stone, 16x12x5 ins., firmly set 12 ins. in the ground, mkd. ¼ on W. face, with a scattered mound of stone W. of cor.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with aluminum cap mkd.

PIELD NOTE PAPER

GPO 834-834

Form


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 7 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
4			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho				
5		△	**Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground and in a mound of stone, 3 ft. base to top, with aluminum cap mkd. T19N R24E S28|S27 S33|S34 1985 Bury orig. cor. stone alongside aluminum post. This cor. falls on a rocky SW. spur. From this cor., U. S. C. and G. S. triangulation station NAPO bears S.17° 07' W., 345.64 chs. dist., monumented with a bronze disk, 3½ ins. diam., seated flush with the surface of an outcropping of bedrock, with top mkd. "NAPO 1950".**				
6			N 0° 02' E., bet. secs. 27 and 28.				
7	3.00	●	Spur, slopes W.; desc. over NW. slope.				
8	19.99	◯	**Cor. Secs. 27-28-33-34 · The S 1/16 sec. cor. of secs. 27 and 28, determined and recorded by David J. Couch, Registered Land Surveyor, No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap stamped J&C LS 970. This cor. is accepted as a careful and faithful determination of the position of the cor. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. S 1/16 S28|S27 1985 Insert the rebar inside aluminum post.**				400200
9			N. 0° 02' E., beginning new measurement.				
10		●	Desc. over open NW. slope.				
11	1.20	◔	Draw, drains W. · Draw, drains W.; asc. over SW. slope.				
12	9.60	●	Top of ascent; desc. over steep N. slope, through scattered timber.				
13	19.99	◯	**Cor. Secs. 27-28-33-34 · The ¼ sec. cor. of secs. 27 and 28, monumented with a basalt stone, 16x12x5 ins., firmly set 12 ins. in the ground, mkd. ¼ on W. face, with a scattered mound of stone W. of cor. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with aluminum cap mkd.**				400200

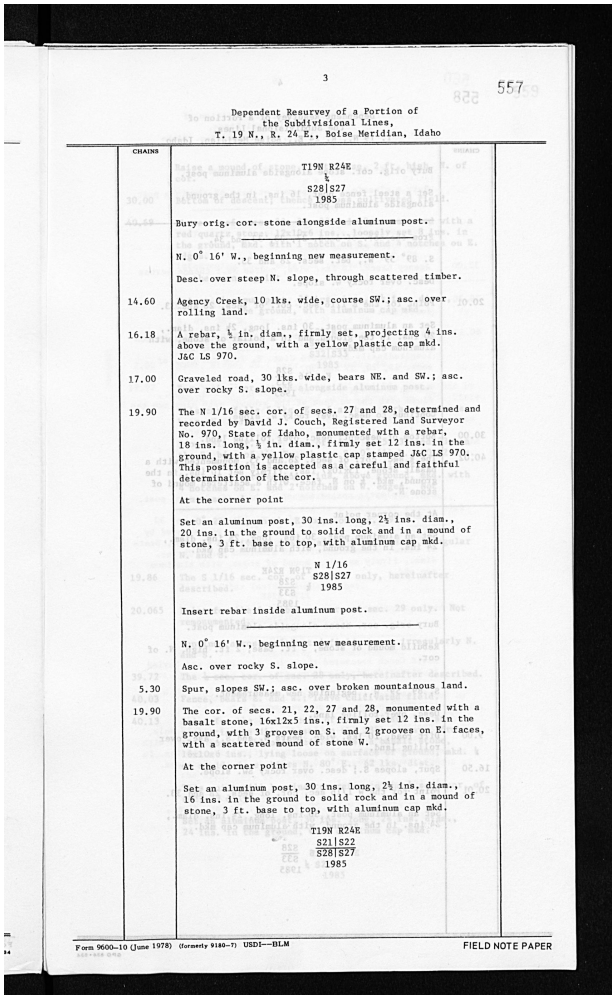

3

557

Dependent Resurvey of a Portion of
the Subdivisional Lines,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS

T19N R24E
¼
S28|S27
1985

Bury orig. cor. stone alongside aluminum post.

N. 0° 16' W., beginning new measurement.

Desc. over steep N. slope, through scattered timber.

14.60 Agency Creek, 10 lks. wide, course SW.; asc. over rolling land.

16.18 A rebar, ½ in. diam., firmly set, projecting 4 ins. above the ground, with a yellow plastic cap mkd. J&C LS 970.

17.00 Graveled road, 30 lks. wide, bears NE. and SW.; asc. over rocky S. slope.

19.90 The N 1/16 sec. cor. of secs. 27 and 28, determined and recorded by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap stamped J&C LS 970. This position is accepted as a careful and faithful determination of the cor.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with aluminum cap mkd.

N 1/16
S28|S27
1985

Insert rebar inside aluminum post.

N. 0° 16' W., beginning new measurement.

Asc. over rocky S. slope.

5.30 Spur, slopes SW.; asc. over broken mountainous land.

19.90 The cor. of secs. 21, 22, 27 and 28, monumented with a basalt stone, 16x12x5 ins., firmly set 12 ins. in the ground, with 3 grooves on S. and 2 grooves on E. faces, with a scattered mound of stone W.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with aluminum cap mkd.

T19N R24E
S21|S22
S28|S27
1985

Form 9600–10 (June 1978) (formerly 9180–7) USDI—BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 10 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
14			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho				
15			T19N R24E ½ S28|S27 1985				
16	30.00	●	Bury orig. cor. stone alongside aluminum post.				
17			N. 0° 16' W., beginning new measurement.				
18		●	Desc. over steep N. slope, through scattered timber.				
19	14.60	●	Agency Creek, 10 lks. wide, course SW. · Agency Creek, 10 lks. wide, course SW.; asc. over rolling land.				
20	16.18	△	**A rebar, ½ in. diam., firmly set, projecting 4 ins. above the ground, with a yellow plastic cap mkd. J&C LS 970.**				
21	17.00	■	Graveled road, 30 lks. wide, bears NE. and SW.; asc. over rocky S. slope.				
22	19.90	○	**Cor. Secs. 27-28-33-34 · The N 1/16 sec. cor. of secs. 27 and 28, determined and recorded by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap stamped J&C LS 970. This position is accepted as a careful and faithful determination of the cor. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with aluminum cap mkd. N 1/16 S28|S27 1985**				400200
23	20.07	●	Insert rebar inside aluminum post.				
24			N. 0° 16' W., beginning new measurement.				
25		●	Asc. over rocky S. slope.				
26	5.30	●	Spur, slopes SW.; asc. over broken mountainous land.				
27	19.90	▲	**Cor. Secs. 21-22-27-28 · The cor. of secs. 21, 22, 27 and 28, monumented with a basalt stone, 16x12x5 ins., firmly set 12 ins. in the ground, with 3 grooves on S. and 2 grooves on E. faces, with a scattered mound of stone W. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with aluminum cap mkd. T19N R24E S21|S22 S28|S27 1985**				400300

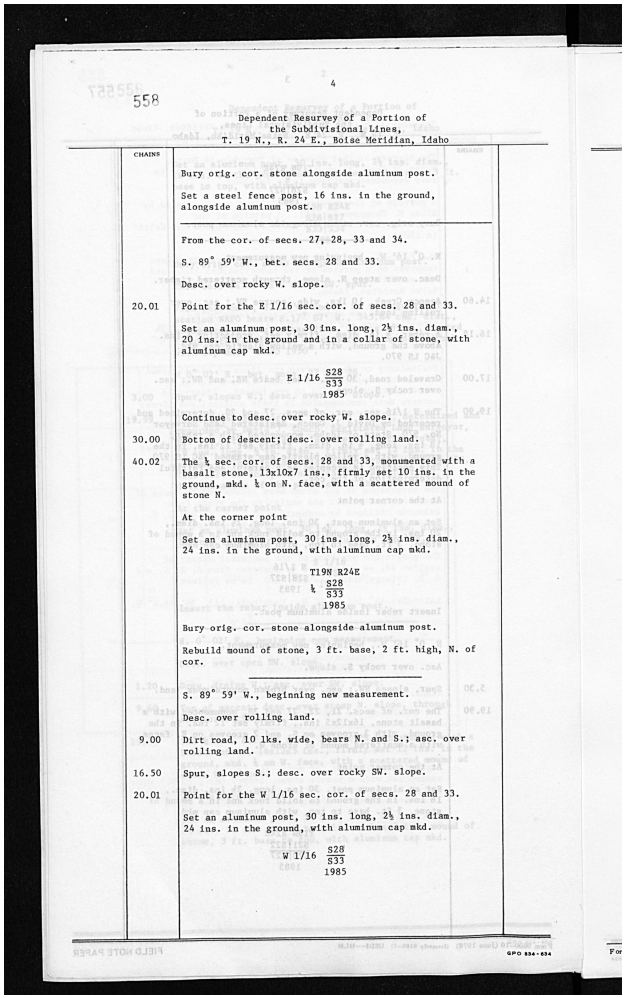

4

558

Dependent Resurvey of a Portion of
the Subdivisional Lines,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS

Bury orig. cor. stone alongside aluminum post.

Set a steel fence post, 16 ins. in the ground, alongside aluminum post.

From the cor. of secs. 27, 28, 33 and 34.

S. 89° 59' W., bet. secs. 28 and 33.

Desc. over rocky W. slope.

20.01 Point for the E 1/16 sec. cor. of secs. 28 and 33.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with aluminum cap mkd.

E 1/16 S28 S33 1985

Continue to desc. over rocky W. slope.

30.00 Bottom of descent; desc. over rolling land.

40.02 The ¼ sec. cor. of secs. 28 and 33, monumented with a basalt stone, 13x10x7 ins., firmly set 10 ins. in the ground, mkd. ¼ on N. face, with a scattered mound of stone N.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T19N R24E
¼ S28 S33 1985

Bury orig. cor. stone alongside aluminum post.

Rebuild mound of stone, 3 ft. base, 2 ft. high, N. of cor.

S. 89° 59' W., beginning new measurement.

Desc. over rolling land.

9.00 Dirt road, 10 lks. wide, bears N. and S.; asc. over rolling land.

16.50 Spur, slopes S.; desc. over rocky SW. slope.

20.01 Point for the W 1/16 sec. cor. of secs. 28 and 33.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

W 1/16 S28 S33 1985

GPO 834-634


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 12 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
28			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho				
29		●	Bury orig. cor. stone alongside aluminum post.				
30		●	Set a steel fence post, 16 ins. in the ground, alongside aluminum post.				
31		▲	**Cor. Secs. 27-28-33-34 · From the cor. of secs. 27, 28, 33 and 34.**				400200
32			S. 89° 59' W., bet. secs. 28 and 33.				
33		●	Desc. over rocky W. slope.				
34	20.01	◯	**Cor. Secs. 27-28-33-34 · Point for the E 1/16 sec. cor. of secs. 28 and 33. Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with aluminum cap mkd. E 1/16 S28 S33 1985**				400200
35		●	Continue to desc. over rocky W. slope.				
36	30.00	●	Bottom of descent; desc. over rolling land.				
37	40.02	△	**¼ Cor. Sec. 28 S · The ¼ sec. cor. of secs. 28 and 33, monumented with a basalt stone, 13x10x7 ins., firmly set 10 ins. in the ground, mkd. ¼ on N. face, with a scattered mound of stone N. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R24E ¼ S28 S33 1985 Bury orig. cor. stone alongside aluminum post. Rebuild mound of stone, 3 ft. base, 2 ft. high, N. of cor.**				340200
38			S. 89° 59' W., beginning new measurement.				
39		●	Desc. over rolling land.				
40	9.00	■	Dirt road, 10 lks. wide, bears N. and S.; asc. over rolling land.				
41	16.50	●	Spur, slopes S.; desc. over rocky SW. slope.				
42	20.01	◯	**Cor. Secs. 27-28-33-34 · Point for the W 1/16 sec. cor. of secs. 28 and 33. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. W 1/16 S28 S33 1985**				400200

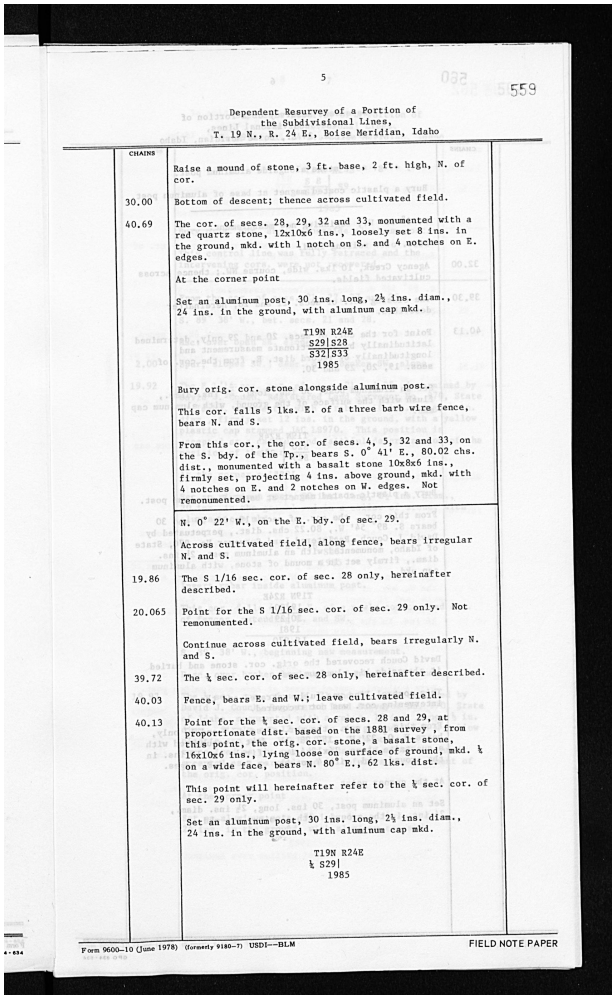

5

559

Dependent Resurvey of a Portion of
the Subdivisional Lines,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS	
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
30.00	Bottom of descent; thence across cultivated field.
40.69	The cor. of secs. 28, 29, 32 and 33, monumented with a red quartz stone, 12x10x6 ins., loosely set 8 ins. in the ground, mkd. with 1 notch on S. and 4 notches on E. edges.
	At the corner point
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.
	T19N R24E S29|S28 S32|S33 1985
	Bury orig. cor. stone alongside aluminum post.
	This cor. falls 5 lks. E. of a three barb wire fence, bears N. and S.
	From this cor., the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., bears S. 0° 41' E., 80.02 chs. dist., monumented with a basalt stone 10x8x6 ins., firmly set, projecting 4 ins. above ground, mkd. with 4 notches on E. and 2 notches on W. edges. Not remonumented.
	N. 0° 22' W., on the E. bdy. of sec. 29.
	Across cultivated field, along fence, bears irregular N. and S.
19.86	The S 1/16 sec. cor. of sec. 28 only, hereinafter described.
20.065	Point for the S 1/16 sec. cor. of sec. 29 only. Not remonumented.
	Continue across cultivated field, bears irregularly N. and S.
39.72	The ¼ sec. cor. of sec. 28 only, hereinafter described.
40.03	Fence, bears E. and W.; leave cultivated field.
40.13	Point for the ¼ sec. cor. of secs. 28 and 29, at proportionate dist. based on the 1881 survey, from this point, the orig. cor. stone, a basalt stone, 16x10x6 ins., lying loose on surface of ground, mkd. ¼ on a wide face, bears N. 80° E., 62 lks. dist.
	This point will hereinafter refer to the ¼ sec. cor. of sec. 29 only.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.
	T19N R24E ¼ S29| 1985

Form 9600–10 (June 1978) (formerly 9180–7) USDI—BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 10 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
43			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho				
44		●	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.				
45	30.00	●	Bottom of descent; thence across cultivated field.				
46	40.69	△	**Cor. Secs. 28-29-32-33 · The cor. of secs. 28, 29, 32 and 33, monumented with a red quartz stone, 12x10x6 ins., loosely set 8 ins. in the ground, mkd. with 1 notch on S. and 4 notches on E. edges. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R24E S29|S28 S32|S33 1985**				300200
47	19.92	○	**Cor. Secs. 4-5-32-33 · Bury orig. cor. stone alongside aluminum post. This cor. falls 5 lks. E. of a three barb wire fence, bears N. and S. From this cor., the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., bears S. 0° 41' E., 80.02 chs. dist., monumented with a basalt stone 10x8x6 ins., firmly set, projecting 4 ins. above ground, mkd. with 4 notches on E. and 2 notches on W. edges. Not remonumented.**				300100
48			N. 0° 22' W., on the E. bdy. of sec. 29.				
49		●	Across cultivated field, along fence, bears irregular N. and S.				
50	19.86	○	**The S 1/16 sec. cor. of sec. 28 only, hereinafter described.**				
51	20.07	○	**Point for the S 1/16 sec. cor. of sec. 29 only. Not remonumented. Continue across cultivated field, bears irregularly N. and S.**				
52	39.72	△	**¼ Cor. Sec. 28 S · The ¼ sec. cor. of sec. 28 only, hereinafter described.**				340200
53	40.03	●	Fence, bears E. and W.; leave cultivated field.				
54	40.13	△	**¼ Cor. Sec. 28 S · Point for the ¼ sec. cor. of secs. 28 and 29, at proportionate dist. based on the 1881 survey, from this point, the orig. cor. stone, a basalt stone, 16x10x6 ins., lying loose on surface of ground, mkd. ¼ on a wide face, bears N. 80° E., 62 lks. dist. This point will hereinafter refer to the ¼ sec. cor. of sec. 29 only. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R24E ¼ S29| 1985**				340200

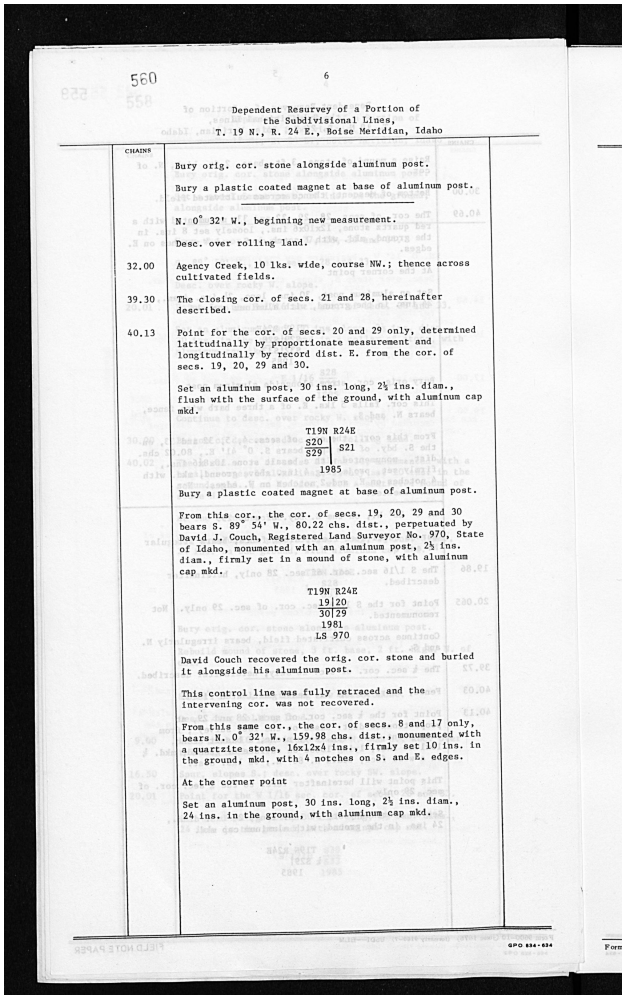

560

6

Dependent Resurvey of a Portion of
the Subdivisional Lines,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS

Bury orig. cor. stone alongside aluminum post.

Bury a plastic coated magnet at base of aluminum post.

N. 0° 32' W., beginning new measurement.

Desc. over rolling land.

32.00 Agency Creek, 10 lks. wide, course NW.; thence across cultivated fields.

39.30 The closing cor. of secs. 21 and 28, hereinafter described.

40.13 Point for the cor. of secs. 20 and 29 only, determined latitudinally by proportionate measurement and longitudinally by record dist. E. from the cor. of secs. 19, 20, 29 and 30.

Set an aluminum post, 30 ins. long, 2½ ins. diam., flush with the surface of the ground, with aluminum cap mkd.

T19N R24E
S20 | S21
S29
1985

Bury a plastic coated magnet at base of aluminum post.

From this cor., the cor. of secs. 19, 20, 29 and 30 bears S. 89° 54' W., 80.22 chs. dist., perpetuated by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with an aluminum post, 2½ ins. diam., firmly set in a mound of stone, with aluminum cap mkd.

T19N R24E
19|20
30|29
1981
LS 970

David Couch recovered the orig. cor. stone and buried it alongside his aluminum post.

This control line was fully retraced and the intervening cor. was not recovered.

From this same cor., the cor. of secs. 8 and 17 only, bears N. 0° 32' W., 159.98 chs. dist., monumented with a quartzite stone, 16x12x4 ins., firmly set 10 ins. in the ground, mkd. with 4 notches on S. and E. edges.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

GPO 834-834


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 6 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
55			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho				
56		●	Bury orig. cor. stone alongside aluminum post.				
57		●	Bury a plastic coated magnet at base of aluminum post.				
58			N. 0° 32' W., beginning new measurement.				
59		●	Desc. over rolling land.				
60	32.00	●	Agency Creek, 10 lks. wide, course NW. · Agency Creek, 10 lks. wide, course NW.; thence across cultivated fields.				
61	**39.30**	**△**	**¼ Cor. Sec. 21 N · The closing cor. of secs. 21 and 28, hereinafter described.**				**340400**
62	**40.13**	**△**	**Cor. Secs. 19-20-29-30 · Point for the cor. of secs. 20 and 29 only, determined latitudinally by proportionate measurement and longitudinally by record dist. E. from the cor. of secs. 19, 20, 29 and 30. Set an aluminum post, 30 ins. long, 2½ ins. diam., flush with the surface of the ground, with aluminum cap mkd. T19N R24E S20 S21 S29 1985 Bury a plastic coated magnet at base of aluminum post. From this cor., the cor. of secs. 19, 20, 29 and 30 bears S. 89° 54' W., 80.22 chs. dist., perpetuated by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with an aluminum post, 2½ ins. diam., firmly set in a mound of stone, with aluminum cap mkd. T19N R24E 19|20 30|29 1981 LS 970 David Couch recovered the orig. cor. stone and buried it alongside his aluminum post. This control line was fully retraced and the intervening cor. was not recovered. From this same cor., the cor. of secs. 8 and 17 only, bears N. 0° 32' W., 159.98 chs. dist., monumented with a quartzite stone, 16x12x4 ins., firmly set 10 ins. in the ground, mkd. with 4 notches on S. and E. edges. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.**				**200300**

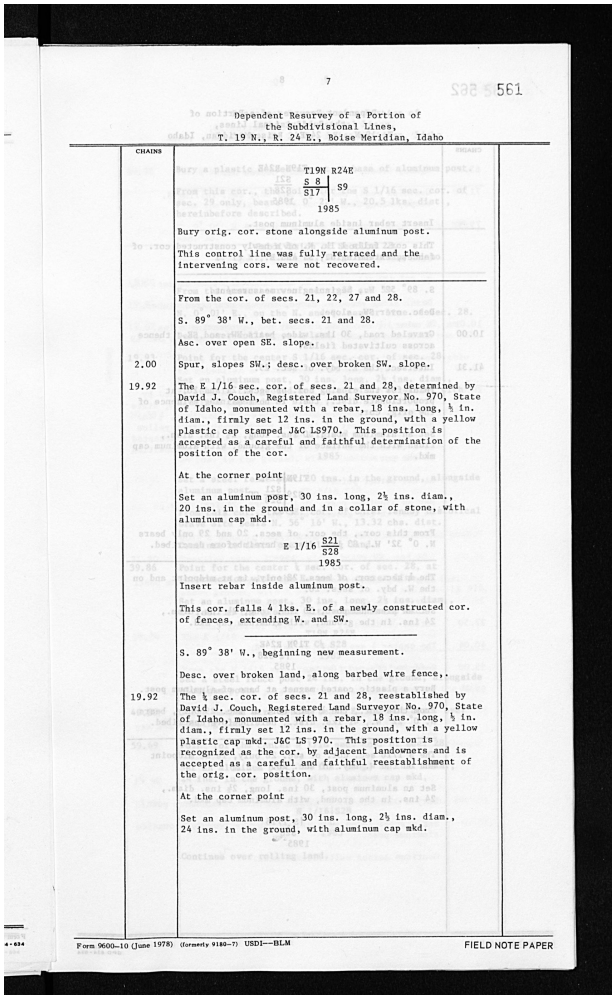

7

561

Dependent Resurvey of a Portion of
the Subdivisional Lines,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS

T19N R24E
S 8 | S9
S17 |
1985

Bury orig. cor. stone alongside aluminum post.

This control line was fully retraced and the intervening cors. were not recovered.

From the cor. of secs. 21, 22, 27 and 28.

S. 89° 38' W., bet. secs. 21 and 28.

Asc. over open SE. slope.

2.00 Spur, slopes SW.; desc. over broken SW. slope.

19.92 The E 1/16 sec. cor. of secs. 21 and 28, determined by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap stamped J&C LS970. This position is accepted as a careful and faithful determination of the position of the cor.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with aluminum cap mkd.

E 1/16 S21 S28
1985

Insert rebar inside aluminum post.

This cor. falls 4 lks. E. of a newly constructed cor. of fences, extending W. and SW.

S. 89° 38' W., beginning new measurement.

Desc. over broken land, along barbed wire fence,.

19.92 The ¼ sec. cor. of secs. 21 and 28, reestablished by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap mkd. J&C LS 970. This position is recognized as the cor. by adjacent landowners and is accepted as a careful and faithful reestablishment of the orig. cor. position.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

Form 9600-10 (June 1978) (formerly 9180-7) USDI—BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 8 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
63			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho				
64			Bury a plastic J&C LS970. aluminum post. T19N R24E IS8 S 8 S9 S17 1985 from this cor. that S 1/16 sec. cor. of sec. 29 only, bears W., 20.5 lks. dist. as hereinbefore described.				
65		●	Bury orig. cor. stone alongside aluminum post.				
66			This control line was fully retraced and the intervening cors. were not recovered.				
67		**▲**	**Cor. Secs. 21-22-27-28 · From the cor. of secs. 21, 22, 27 and 28.**				**400300**
68			S. 89° 38' W., bet. secs. 21 and 28.				
69		●	Asc. over open SE. slope.				
70	**2.00**	●	Spur, slopes SW.; desc. over broken SW. slope.				
71	**19.92**	**◯**	**Cor. Secs. 20-21-28-29 · The E 1/16 sec. cor. of secs. 21 and 28, determined by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap stamped J&C LS970. This position is accepted as a careful and faithful determination of the position of the cor. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with aluminum cap mkd. E 1/16 S21 S28 1985 Insert rebar inside aluminum post. This cor. falls 4 lks. E. of a newly constructed cor. of fences, extending W. and SW.**				**300300**
72			S. 89° 38' W., beginning new measurement.				
73		●	Desc. over broken land, along barbed wire fence,.				
74	**19.92**	**◯**	**Cor. Secs. 20-21-28-29 · The ¼ sec. cor. of secs. 21 and 28, reestablished by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap mkd. J&C LS 970. This position is recognized as the cor. by adjacent landowners and is accepted as a careful and faithful reestablishment of the orig. cor. position. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.**				**300300**
75		●	Continue over rolling land.				

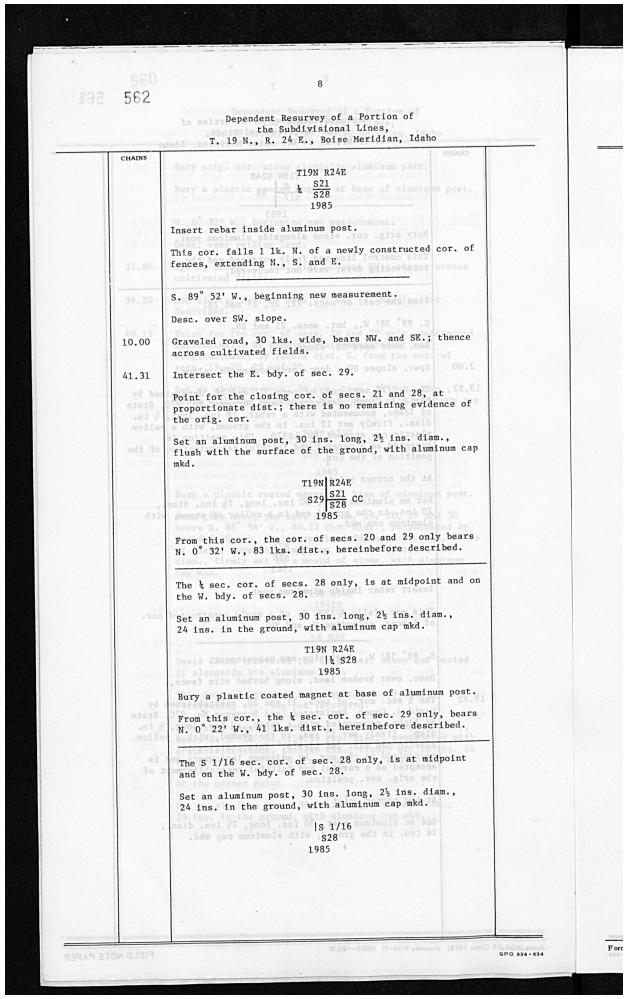

562

8

Dependent Resurvey of a Portion of
the Subdivisional Lines,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS

T19N R24E
¼ S21
S28
1985

Insert rebar inside aluminum post.

This cor. falls 1 lk. N. of a newly constructed cor. of fences, extending N., S. and E.

S. 89° 52' W., beginning new measurement.

Desc. over SW. slope.

10.00 Graveled road, 30 lks. wide, bears NW. and SE.; thence across cultivated fields.

41.31 Intersect the E. bdy. of sec. 29.

Point for the closing cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set an aluminum post, 30 ins. long, 2½ ins. diam., flush with the surface of the ground, with aluminum cap mkd.

T19N R24E
S29 S21
S28 CC
1985

From this cor., the cor. of secs. 20 and 29 only bears N. 0° 32' W., 83 lks. dist., hereinbefore described.

The ¼ sec. cor. of secs. 28 only, is at midpoint and on the W. bdy. of secs. 28.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T19N R24E
¼ S28
1985

Bury a plastic coated magnet at base of aluminum post.

From this cor., the ¼ sec. cor. of sec. 29 only, bears N. 0° 22' W., 41 lks. dist., hereinbefore described.

The S 1/16 sec. cor. of sec. 28 only, is at midpoint and on the W. bdy. of sec. 28.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

S 1/16
S28
1985

GPO 834-634


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 6 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
76			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho				
77		△	**T19N R24E ¼ S21 S28 1985 Insert rebar inside aluminum post. This cor. falls 1 lk. N. of a newly constructed cor. of fences, extending N., S. and E.**				
78	12.00	●	across cultivated				
79	19.30		S. 89° 52' W., beginning new measurement. Desc. over SW. slope.				
80	10.00	●	Graveled road, 30 lks. wide, bears NW. and SE.; thence across cultivated fields.				
81	41.31	○	**Cor. Secs. 20-21-28-29 · Intersect the E. bdy. of sec. 29. Point for the closing cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the orig. cor. Set an aluminum post, 30 ins. long, 2½ ins. diam., flush with the surface of the ground, with aluminum cap mkd. T19N R24E S29 S21 S28 CC 1985 From this cor., the cor. of secs. 20 and 29 only bears N. 0° 32' W., 83 lks. dist., hereinbefore described.**				300300
82		△	**The ¼ sec. cor. of secs. 28 only, is at midpoint and on the W. bdy. of secs. 28. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R24E ¼ S28 1985 Bury a plastic coated magnet at base of aluminum post. From this cor., the ¼ sec. cor. of sec. 29 only, bears N. 0° 22' W., 41 lks. dist., hereinbefore described.**				
83		○	**The S 1/16 sec. cor. of sec. 28 only, is at midpoint and on the W. bdy. of sec. 28. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. S 1/16 S28 1985**				

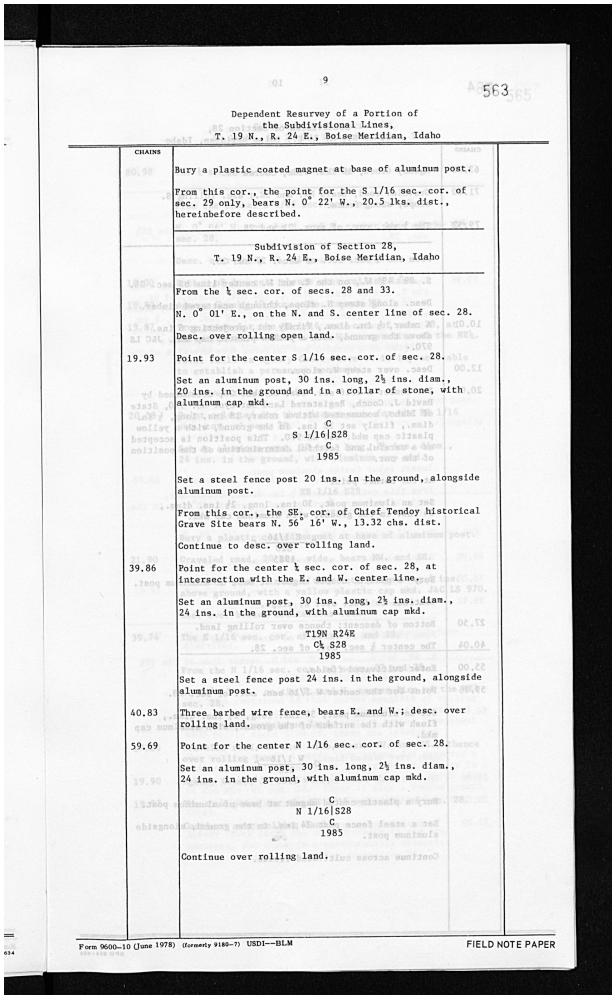

9

563

Dependent Resurvey of a Portion of
the Subdivisional Lines,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS

Bury a plastic coated magnet at base of aluminum post.

From this cor., the point for the S 1/16 sec. cor. of sec. 29 only, bears N. 0° 22' W., 20.5 lks. dist., hereinbefore described.

Subdivision of Section 28,
T. 19 N., R. 24 E., Boise Meridian, Idaho

From the ¼ sec. cor. of secs. 28 and 33.

N. 0° 01' E., on the N. and S. center line of sec. 28.

Desc. over rolling open land.

19.93 Point for the center S 1/16 sec. cor. of sec. 28.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with aluminum cap mkd.

C
S 1/16|S28
C
1985

Set a steel fence post 20 ins. in the ground, alongside aluminum post.

From this cor., the SE. cor. of Chief Tendoy historical Grave Site bears N. 56° 16' W., 13.32 chs. dist.

Continue to desc. over rolling land.

39.86 Point for the center ¼ sec. cor. of sec. 28, at intersection with the E. and W. center line.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

T19N R24E
C¼ S28
1985

Set a steel fence post 24 ins. in the ground, alongside aluminum post.

40.83 Three barbed wire fence, bears E. and W.; desc. over rolling land.

59.69 Point for the center N 1/16 sec. cor. of sec. 28.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

C
N 1/16|S28
C
1985

Continue over rolling land.

Form 9600-10 (June 1978) (formerly 9186-7) USDI—BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 8 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
84			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 24 E., Boise Meridian, Idaho				
85		●	Bury a plastic coated magnet at base of aluminum post.				
86		●	From this cor., the point for the S 1/16 sec. cor. of sec. 29 only, bears N. 0° 22' W., 20.5 lks. dist., hereinbefore described.				
87			Subdivision of Section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho				
88		▲	**Cor. Secs. 27-28-33-34 · From the ¼ sec. cor. of secs. 28 and 33.**				400200
89			N. 0° 01' E., on the N. and S. center line of sec. 28.				
90		●	Desc. over rolling land.				
91	19.93	○	**Point for the center S 1/16 sec. cor. of sec. 28. Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with aluminum cap mkd. C S 1/16|S28 C 1985 Set a steel fence post 20 ins. in the ground, alongside aluminum post. From this cor., the SE. cor. of Chief Tendoy historical Grave Site bears N. 56° 16' W., 13.32 chs. dist. Continue to desc. over rolling land.**				
92	39.86	△	**¼ Cor. Sec. 28 S · Point for the center ¼ sec. cor. of sec. 28, at intersection with the E. and W. center line. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R24E C¼ S28 1985 Set a steel fence post 24 ins. in the ground, alongside aluminum post.**				340200
93	40.83	●	Three barbed wire fence, bears E. and W.; desc. over rolling land.				
94	59.69	○	**Point for the center N 1/16 sec. cor. of sec. 28. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. C N 1/16|S28 C 1985 Continue over rolling land.**				

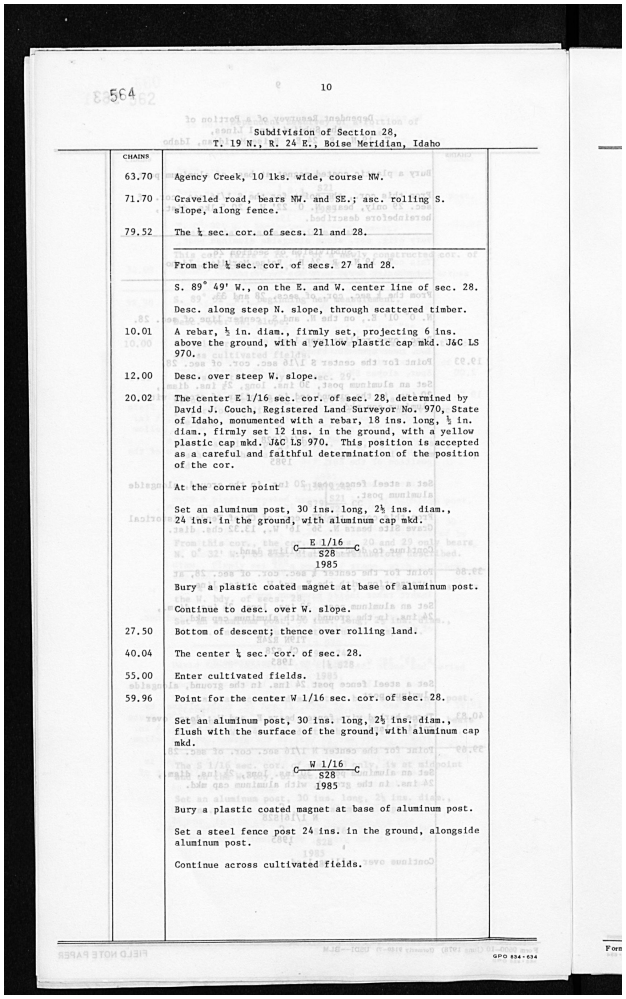

564

10

Subdivision of Section 28,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS

63.70 Agency Creek, 10 lks. wide, course NW.

71.70 Graveled road, bears NW. and SE.; asc. rolling S. slope, along fence.

79.52 The ¼ sec. cor. of secs. 21 and 28.

From the ¼ sec. cor. of secs. 27 and 28.

S. 89° 49' W., on the E. and W. center line of sec. 28.

Desc. along steep N. slope, through scattered timber.

10.01 A rebar, ½ in. diam., firmly set, projecting 6 ins. above the ground, with a yellow plastic cap mkd. J&C LS 970.

12.00 Desc. over steep W. slope.

20.02 The center E 1/16 sec. cor. of sec. 28, determined by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap mkd. J&C LS 970. This position is accepted as a careful and faithful determination of the position of the cor.

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

C—E 1/16—C
S28
1985

Bury a plastic coated magnet at base of aluminum post.

Continue to desc. over W. slope.

27.50 Bottom of descent; thence over rolling land.

40.04 The center ¼ sec. cor. of sec. 28.

55.00 Enter cultivated fields.

59.96 Point for the center W 1/16 sec. cor. of sec. 28.

Set an aluminum post, 30 ins. long, 2½ ins. diam., flush with the surface of the ground, with aluminum cap mkd.

C—W 1/16—C
S28
1985

Bury a plastic coated magnet at base of aluminum post.

Set a steel fence post 24 ins. in the ground, alongside aluminum post.

Continue across cultivated fields.

GPO 834-634


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 10 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
95			Dependent Resurvey, a Portion of Subdivision of Section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho				
96	63.70		Agency Creek, 10 lks. wide, course NW.				
97	71.70		Graveled road, bears NW. and SE.; asc. rolling S. slope, along fence.				
98	79.52		**Cor. Secs. 21-22-27-28 · The ¼ sec. cor. of secs. 21 and 28.**				400300
99			From the ¼ sec. cor. of secs. 27 and 28.				
100			S. 89° 49' W., on the E. and W. center line of sec. 28. Desc. along steep N. slope, through scattered timber.				
101	10.01		A rebar, ½ in. diam., firmly set, projecting 6 ins. above the ground, with a yellow plastic cap mkd. J&C LS 970.				
102	12.00		Desc. over steep W. slope.				
103	20.02		**The center E 1/16 sec. cor. of sec. 28, determined by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap mkd. J&C LS 970. This position is accepted as a careful and faithful determination of the position of the cor. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. C—E 1/16—C S28 1985 Bury a plastic coated magnet at base of aluminum post. Continue to desc. over W. slope.**				
104	27.50		Bottom of descent; thence over rolling land.				
105	40.04		**¼ Cor. Sec. 28 S · The center ¼ sec. cor. of sec. 28.**				340200
106	55.00		Enter cultivated fields.				
107	59.96		**Point for the center W 1/16 sec. cor. of sec. 28. Set an aluminum post, 30 ins. long, 2½ ins. diam., flush with the surface of the ground, with aluminum cap mkd. C—W 1/16—C S28 1985 Bury a plastic coated magnet at base of aluminum post. Set a steel fence post 24 ins. in the ground, alongside aluminum post. Continue across cultivated fields.**				

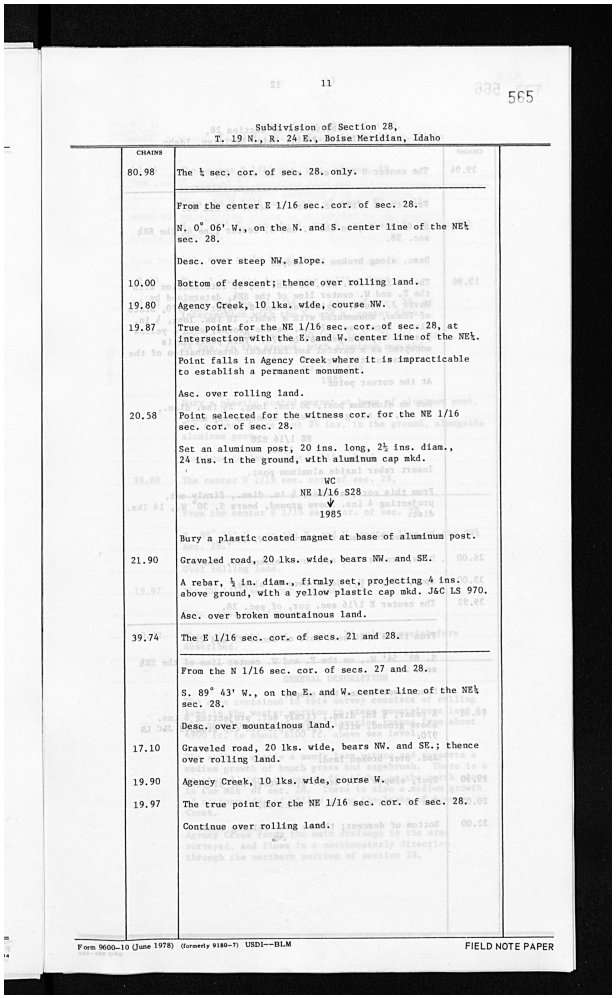

11

565

Subdivision of Section 28,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS	
80.98	The ¼ sec. cor. of sec. 28. only.
	From the center E 1/16 sec. cor. of sec. 28.
	N. 0° 06' W., on the N. and S. center line of the NE¼ sec. 28.
	Desc. over steep NW. slope.
10.00	Bottom of descent; thence over rolling land.
19.80	Agency Creek, 10 lks. wide, course NW.
19.87	True point for the NE 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line of the NE¼.
	Point falls in Agency Creek where it is impracticable to establish a permanent monument.
	Asc. over rolling land.
20.58	Point selected for the witness cor. for the NE 1/16 sec. cor. of sec. 28.
	Set an aluminum post, 20 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. WC NE 1/16 S28 V 1985
	Bury a plastic coated magnet at base of aluminum post.
21.90	Graveled road, 20 lks. wide, bears NW. and SE.
	A rebar, ½ in. diam., firmly set, projecting 4 ins. above ground, with a yellow plastic cap mkd. J&C LS 970.
	Asc. over broken mountainous land.
39.74	The E 1/16 sec. cor. of secs. 21 and 28.
	From the N 1/16 sec. cor. of secs. 27 and 28.
	S. 89° 43' W., on the E. and W. center line of the NE¼ sec. 28.
	Desc. over mountainous land.
17.10	Graveled road, 20 lks. wide, bears NW. and SE.; thence over rolling land.
19.90	Agency Creek, 10 lks. wide, course W.
19.97	The true point for the NE 1/16 sec. cor. of sec. 28.
	Continue over rolling land.

Form 9600–10 (June 1978) (formerly 9180–7) USDI—BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 15 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
10 8			Subdivision of Section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho				
10 9	80.98	○	**Cor. Secs. 20-21-28-29 · The ¼ sec. cor. of sec. 28. only.**				300300
11 0			From the center E 1/16 sec. cor. of sec. 28.				
11 1			N. 0° 06' W., on the N. and S. center line of the NE¼ sec. 28.				
11 2		●	Desc. over steep NW. slope.				
11 3	10.00	●	Bottom of descent; thence over rolling land.				
11 4	19.80	◉	Agency Creek, 10 lks. wide, course NW.				
11 5	19.87	○	**28NE16C · True point for the NE 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line of the NE¼. Point falls in Agency Creek where it is impracticable to establish a permanent monument.**				360260
11 6		●	Asc. over rolling land.				
11 7	20.58	○	**28NE16C · Point selected for the witness cor. for the NE 1/16 sec. cor. of sec. 28. Set an aluminum post, 20 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. WC NE 1/16 S28 V 1985 Bury a plastic coated magnet at base of aluminum post.**				360260
11 8	21.90	■	Graveled road, 20 lks. wide, bears NW. and SE. A rebar, ½ in. diam., firmly set, projecting 4 ins. above ground, with a yellow plastic cap mkd. J&C LS 970.				
11 9		●	Asc. over broken mountainous land.				
12 0	39.74	○	**Cor. Secs. 21-22-27-28 · The E 1/16 sec. cor. of secs. 21 and 28.**				400300
12 1			From the N 1/16 sec. cor. of secs. 27 and 28.				
12 2			S. 89° 43' W., on the E. and W. center line of the NE¼ sec. 28.				
12 3		●	Desc. over mountainous land.				
12 4	17.10	■	Graveled road, 20 lks. wide, bears NW. and SE.; thence over rolling land.				
12 5	19.90	◉	Agency Creek, 10 lks. wide, course W.				
12 6	19.97	○	**28NE16C · The true point for the NE 1/16 sec. cor. of sec. 28.**				360260
12 7		●	Continue over rolling land.				

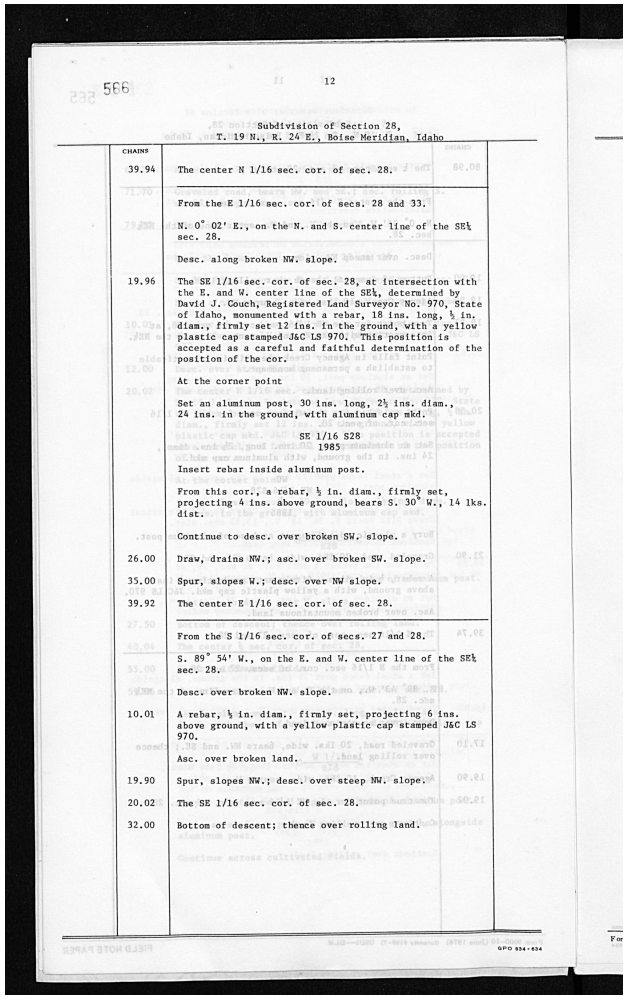

566

12

Subdivision of Section 28,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS	
39.94	The center N 1/16 sec. cor. of sec. 28.
	From the E 1/16 sec. cor. of secs. 28 and 33.
	N. 0° 02' E., on the N. and S. center line of the SE¼ sec. 28.
	Desc. along broken NW. slope.
19.96	The SE 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line of the SE¼, determined by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap stamped J&C LS 970. This position is accepted as a careful and faithful determination of the position of the cor.
	At the corner point
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. SE 1/16 S28 1985
	Insert rebar inside aluminum post.
	From this cor., a rebar, ½ in. diam., firmly set, projecting 4 ins. above ground, bears S. 30° W., 14 lks. dist.
	Continue to desc. over broken SW. slope.
26.00	Draw, drains NW.; asc. over broken SW. slope.
35.00	Spur, slopes W.; desc. over NW slope.
39.92	The center E 1/16 sec. cor. of sec. 28.
	From the S 1/16 sec. cor. of secs. 27 and 28.
	S. 89° 54' W., on the E. and W. center line of the SE¼ sec. 28.
	Desc. over broken NW. slope.
10.01	A rebar, ½ in. diam., firmly set, projecting 6 ins. above ground, with a yellow plastic cap stamped J&C LS 970.
	Asc. over broken land.
19.90	Spur, slopes NW.; desc. over steep NW. slope.
20.02	The SE 1/16 sec. cor. of sec. 28.
32.00	Bottom of descent; thence over rolling land.

GPO 934-634

PAGE SURVEY PLOT


N up

No reliable locations available for this page.

0 located symbols · 11 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
128			Subdivision of Section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho				
129	39.94	○	**Cor. Secs. 2-28-33 · The center N 1/16 sec. cor. of sec. 28.**				400200
130			From the E 1/16 sec. cor. of secs. 28 and 33.				
131			N. 0° 02' E., on the N. and S. center line of the SE¼ sec. 28.				
132		●	Desc. along broken NW. slope.				
133	19.96	○	**28SE16C · The SE 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line of the SE¼, determined by David J. Couch, Registered Land Surveyor No. 970, State of Idaho, monumented with a rebar, 18 ins. long, ½ in. diam., firmly set 12 ins. in the ground, with a yellow plastic cap stamped J&C LS 970. This position is accepted as a careful and faithful determination of the position of the cor. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. SE 1/16 S28 1985 Insert rebar inside aluminum post. From this cor., a rebar, ½ in. diam., firmly set, projecting 4 ins. above ground, bears S. 30° W., 14 lks. dist.**				360220
134		●	Continue to desc. over broken SW. slope.				
135	26.00	◉	Draw, drains NW. · Draw, drains NW.; asc. over broken SW. slope.				
136	35.00	●	Spur, slopes W.; desc. over NW slope.				
137	39.92	○	**Cor. Secs. 27-28-33-34 · The center E 1/16 sec. cor. of sec. 28. From the S 1/16 sec. cor. of secs. 27 and 28. S. 89° 54' W., on the E. and W. center line of the SE¼ sec. 28. Desc. over broken NW. slope.**				400200
138	10.01	●	A rebar, ½ in. diam., firmly set, projecting 6 ins. above ground, with a yellow plastic cap stamped J&C LS 970. Asc. over broken land.				
139	19.90	●	Spur, slopes NW.; desc. over steep NW. slope.				
140	20.02	○	**28SE16C · The SE 1/16 sec. cor. of sec. 28.**				360220
141	32.00	●	Bottom of descent; thence over rolling land. Continue across cultivated fields.				

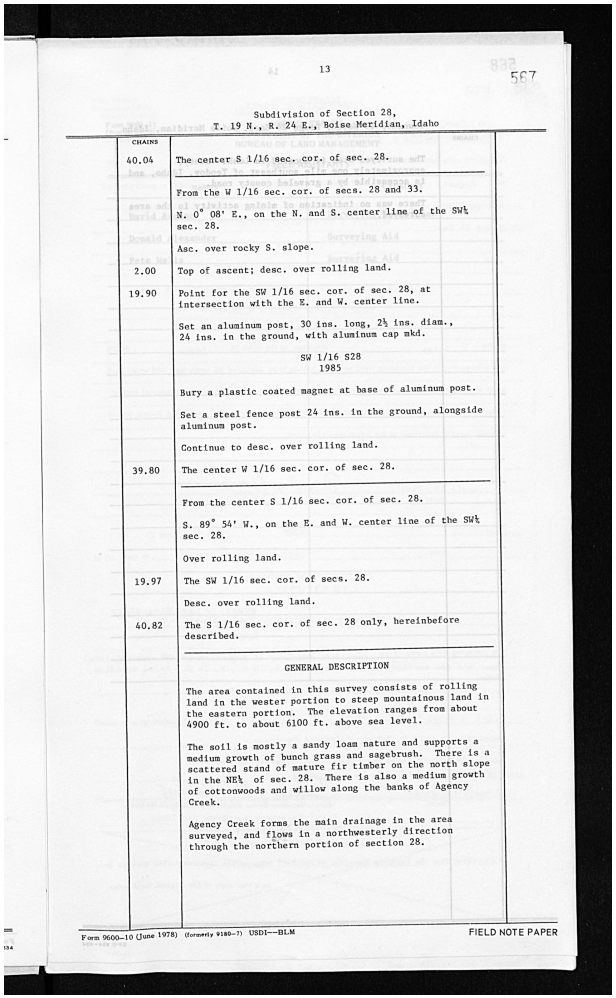

13

567

Subdivision of Section 28,
T. 19 N., R. 24 E., Boise Meridian, Idaho

CHAINS	
40.04	The center S 1/16 sec. cor. of sec. 28.
	From the W 1/16 sec. cor. of secs. 28 and 33.
	N. 0° 08' E., on the N. and S. center line of the SW¼ sec. 28.
	Asc. over rocky S. slope.
2.00	Top of ascent; desc. over rolling land.
19.90	Point for the SW 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. SW 1/16 S28 1985
	Bury a plastic coated magnet at base of aluminum post.
	Set a steel fence post 24 ins. in the ground, alongside aluminum post.
	Continue to desc. over rolling land.
39.80	The center W 1/16 sec. cor. of sec. 28.
	From the center S 1/16 sec. cor. of sec. 28.
	S. 89° 54' W., on the E. and W. center line of the SW¼ sec. 28.
	Over rolling land.
19.97	The SW 1/16 sec. cor. of secs. 28.
	Desc. over rolling land.
40.82	The S 1/16 sec. cor. of sec. 28 only, hereinbefore described.

GENERAL DESCRIPTION

The area contained in this survey consists of rolling land in the wester portion to steep mountainous land in the eastern portion. The elevation ranges from about 4900 ft. to about 6100 ft. above sea level.

The soil is mostly a sandy loam nature and supports a medium growth of bunch grass and sagebrush. There is a scattered stand of mature fir timber on the north slope in the NE¼ of sec. 28. There is also a medium growth of cottonwoods and willow along the banks of Agency Creek.

Agency Creek forms the main drainage in the area surveyed, and flows in a northwesterly direction through the northern portion of section 28.

Form 9600–10 (June 1978) (formerly 9180–7) USDI—BLM FIELD NOTE PAPER


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
142			Subdivision of Section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho				
143	40.04	○	**Cor. Secs. 8-28-33 · The center S 1/16 sec. cor. of sec. 28.**				400200
144			From the W 1/16 sec. cor. of secs. 28 and 33.				
145			N. 0° 08' E., on the N. and S. center line of the SW¼ sec. 28.				
146		●	Asc. over rocky S. slope.				
147	2.00	●	Top of ascent; desc. over rolling land.				
148	19.90	○	**28SW16C · Point for the SW 1/16 sec. cor. of sec. 28, at intersection with the E. and W. center line. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. SW 1/16 S28 1985 Bury a plastic coated magnet at base of aluminum post. Set a steel fence post 24 ins. in the ground, alongside aluminum post. Continue to desc. over rolling land.**				320220
149	39.80	○	**The center W 1/16 sec. cor. of sec. 28.**				
150			From the center S 1/16 sec. cor. of sec. 28.				
151			S. 89° 54' W., on the E. and W. center line of the SW¼ sec. 28.				
152		●	Over rolling land.				
153	19.97	○	**28SW16C · The SW 1/16 sec. cor. of secs. 28.**				320220
154		●	Desc. over rolling land.				
155	40.82	○	**The S 1/16 sec. cor. of sec. 28 only, hereinbefore described.**				
156			GENERAL DESCRIPTION The area contained in this survey consists of rolling land in the wester portion to steep mountainous land in the eastern portion. The elevation ranges from about 4900 ft. to about 6100 ft. above sea level. The soil is mostly a sandy loam nature and supports a medium growth of bunch grass and sagebrush. There is a scattered stand of mature fir timber on the north slope in the NE¼ of sec. 28. There is also a medium growth of cottonwoods and willow along the banks of Agency Creek. Agency Creek forms the main drainage in the area surveyed, and flows in a northwesterly direction through the northern portion of section 28.				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 9 calls without a location

Numbers match the text table; only this scan page is shown.

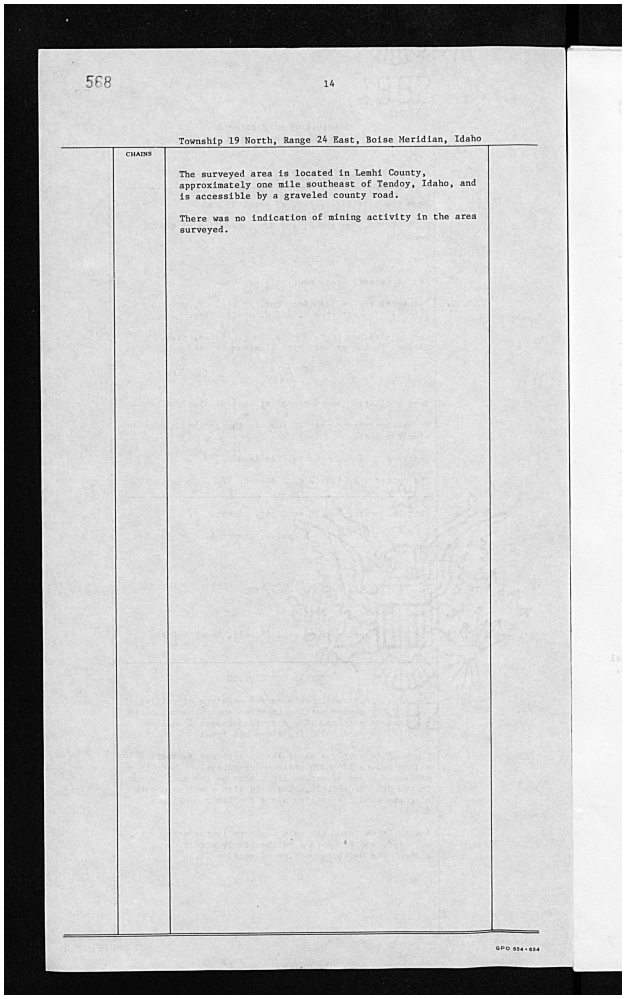


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
15 7		■	568 14 Township 19 North, Range 24 East, Boise Meridian, Idaho CHAINS The surveyed area is located in Lemhi County, approximately one mile southeast of Tendoy, Idaho, and is accessible by a graveled county road. There was no indication of mining activity in the area surveyed. GPO 834-634				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

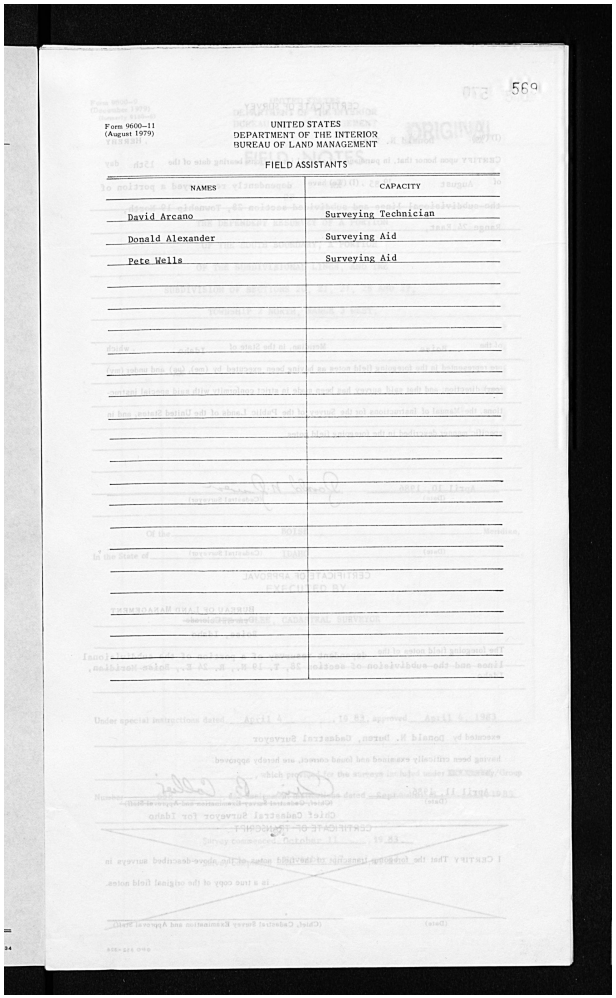

569

Form 9600–11
(August 1979)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS


NAMES	CAPACITY
David Arcano	Surveying Technician
Donald Alexander	Surveying Aid
Pete Wells	Surveying Aid

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
15 8		●	Form 9600-11 (August 1979) UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT FIELD ASSISTANTS NAMES CAPACITY David Arcano Surveying Technician Donald Alexander Surveying Aid Pete Wells Surveying Aid 569 310				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

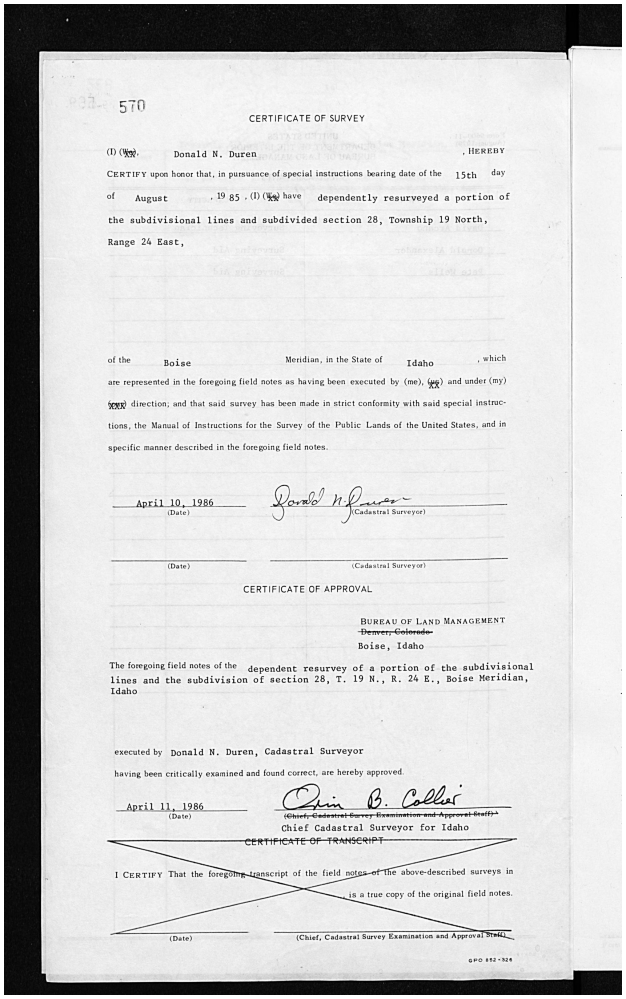

570

CERTIFICATE OF SURVEY

(I) (We), Donald N. Duren, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of August, 19 85, (I) (We) have dependently resurveyed a portion of the subdivisional lines and subdivided section 28, Township 19 North, Range 24 East, of the Boise Meridian, in the State of Idaho, which are represented in the foregoing field notes as having been executed by (me), (us) and under (my) (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 10, 1986 (Date) Donald N. Duren (Cadastral Surveyor)

(Date) (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
~~Denver, Colorado~~
Boise, Idaho

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines and the subdivision of section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho

executed by Donald N. Duren, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

April 11, 1986 (Date) Orin B. Collier (Chief, Cadastral Survey Examination and Approval Staff)
Chief Cadastral Surveyor for Idaho

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date) (Chief, Cadastral Survey Examination and Approval Staff)

GPO 852-326

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
159		●	833. 570 CERTIFICATE OF SURVEY (I) (We, Donald N. Duren , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of August , 19 85 , (I) (We) have dependently resurveyed a portion of the subdivisional lines and subdivided section 28, Township 19 North, Range 24 East, of the Boise Meridian, in the State of Idaho , which are represented in the foregoing field notes as having been executed by (me), (us) and under (my) (our) direction; and that said survey has been made in strict conformity with said special instruc- tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes. April 10, 1986 Donald N. Duren (Date) (Cadastral Surveyor) _____ _____ (Date) (Cadastral Surveyor) CERTIFICATE OF APPROVAL BUREAU OF LAND MANAGEMENT Denver, Colorado Boise, Idaho The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines and the subdivision of section 28, T. 19 N., R. 24 E., Boise Meridian, Idaho executed by Donald N. Duren, Cadastral Surveyor having been critically examined and found correct, are hereby approved. April 11, 1986 Orin B. Collier (Date) (Chief, Cadastral Survey Examination and Approval Staff) Chief Cadastral Surveyor for Idaho ----CERTIFICATE OF TRANSCRIPT---- I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes. _____ _____ (Date) (Chief, Cadastral Survey Examination and Approval Staff) GPO 852-326					

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Sections 21 & 27 & 28 & 33 · N 0° 02' E.

Benewah County, ID

START CORNER (ch 0.00)

Corner, Secs. 27, 28, 33 & 34

GCDB code: 400200

NOTABLE CALLS ALONG RUN

ch 1.20 Draw, drains W. — Draw, drains W.; asc. over SW. slope.
ch 19.80 Agency Creek, 10 lks. wide, course NW. — Agency Creek, 10 lks. wide, course NW.
ch 19.87 1/16 corner, Sec. 28
ch 19.92 1/16 corner, Secs. 4, 5, 32 & 33
ch 19.92 1/16 corner, Secs. 20, 21, 28 & 29
ch 19.92 1/16 corner, Secs. 20, 21, 28 & 29
ch 19.93 1/16 corner
ch 19.99 1/16 corner, Secs. 27, 28, 33 & 34
ch 19.99 1/16 corner, Secs. 27, 28, 33 & 34
ch 20.01 1/16 corner, Secs. 27, 28, 33 & 34

END CORNER (ch 80.98)

1/16 corner, Secs. 20, 21, 28 & 29

GCDB code: 300300

76 total calls · 0 geo-located · 0 with elevation


TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE · Sections: 21 · 27 · 28 · 33 · N 0° 02' E.

Run Geolocate on this document to generate the elevation profile.

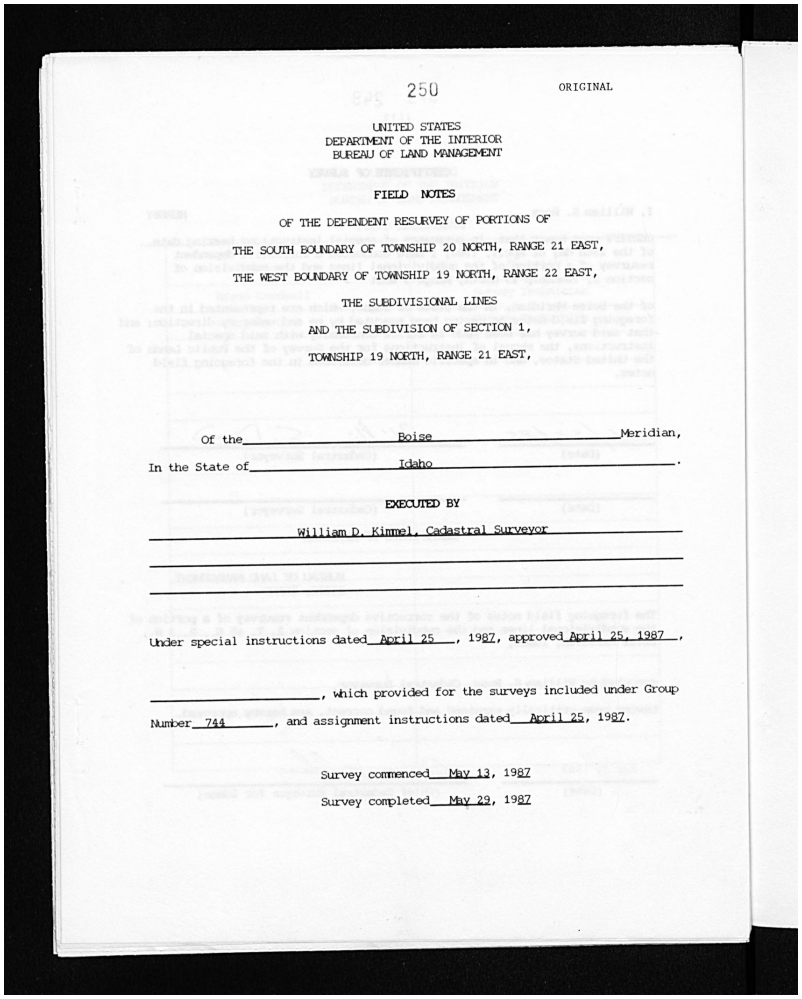

250 ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE DEPENDENT RESURVEY OF PORTIONS OF

THE SOUTH BOUNDARY OF TOWNSHIP 20 NORTH, RANGE 21 EAST,

THE WEST BOUNDARY OF TOWNSHIP 19 NORTH, RANGE 22 EAST,

THE SUBDIVISIONAL LINES

AND THE SUBDIVISION OF SECTION 1,

TOWNSHIP 19 NORTH, RANGE 21 EAST,

Of the Boise Meridian,

In the State of Idaho.

EXECUTED BY

William D. Kimmel, Cadastral Surveyor

Under special instructions dated April 25, 1987, approved April 25, 1987,

, which provided for the surveys included under Group

Number 744, and assignment instructions dated April 25, 1987.

Survey commenced May 13, 1987


Survey completed May 29, 1987

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
1		●	250 ORIGINAL UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT FIELD NOTES OF THE DEPENDENT RESURVEY OF PORTIONS OF THE SOUTH BOUNDARY OF TOWNSHIP 20 NORTH, RANGE 21 EAST, THE WEST BOUNDARY OF TOWNSHIP 19 NORTH, RANGE 22 EAST, THE SUBDIVISIONAL LINES AND THE SUBDIVISION OF SECTION 1, TOWNSHIP 19 NORTH, RANGE 21 EAST, Of the Boise Meridian, In the State of Idaho . EXECUTED BY William D. Kimmel, Cadastral Surveyor Under special instructions dated April 25 , 1987, approved April 25, 1987 , , which provided for the surveys included under Group Number 744 , and assignment instructions dated April 25, 1987. Survey commenced May 13, 1987 Survey completed May 29, 1987				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

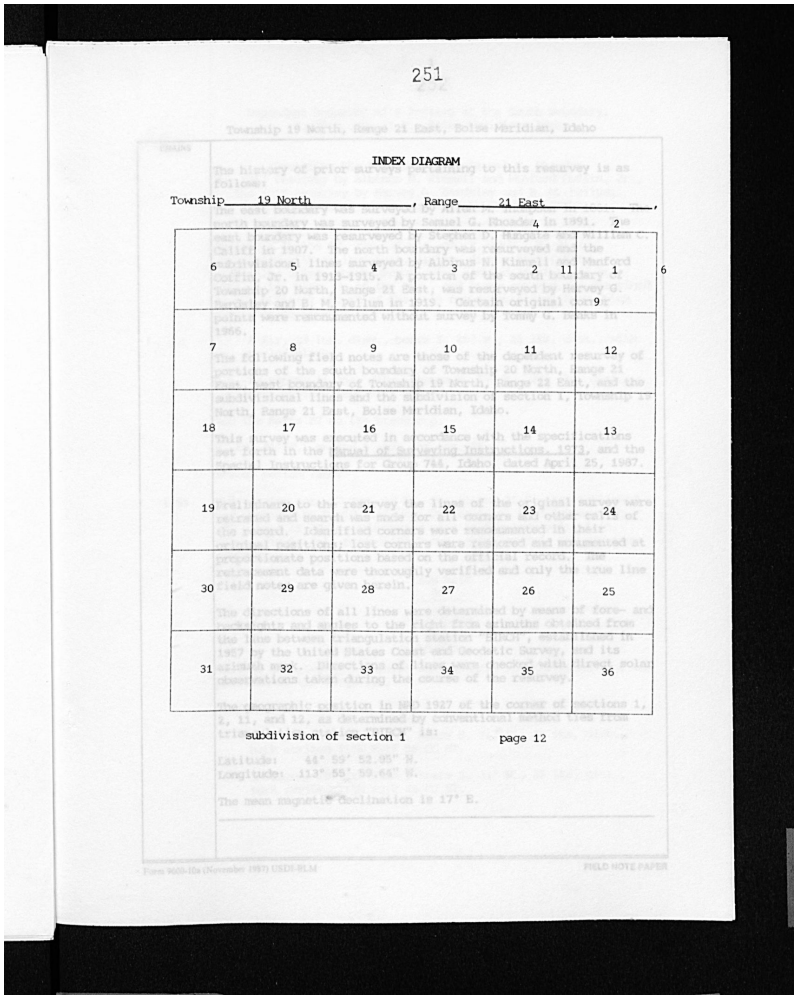


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
2		●	251 Township 19 North, Range 21 East, Boise Meridian, Idaho 19404 INDEX DIAGRAM The history of prior surveys pertaining to this resurvey is as follows: Township 19 North , Range 21 East , The east boundary was surveyed by [illegible] [illegible] [illegible] The [illegible] boundary was surveyed by Samuel G. Rhoads 4 in 1991. 2 least [illegible] was resurveyed by Stephen D. Murray [illegible] [illegible] califor in 1907. The north boundary was resurveyed and the 6 [illegible] 5 lines surveyed by Algustus M. Kimball Munford 1 6 colfid Jr. in 1919-1919. A portion of the south [illegible] [illegible] Township 20 North, Range 21 East, was resurveyed by Harvey G. [illegible] and H. M. Pellum in 1919. Certain original corners 9 points were reestablished with[illegible] Survey [illegible] Harvey G. [illegible] 1956. 7 8 9 10 11 12 The following field notes are those of the dependent resurvey of portions of the south boundary of Township 20 North, Range 21 East, east boundary of Township 19 North, Range 22 East, and the [illegible] tional lines of the [illegible] meridian of Section 1, Township 19 North, Range 21 East, Boise Meridian, Idaho. 18 17 16 15 14 13 This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the [illegible] Instructions for Group 744, Idaho dated April 25, 1987. 19 20 21 22 23 24 [illegible] resurvey the lines of the original survey were reestablished and searches were made for corners and other evidence of the [illegible] land. Identified corners were reestablished in their original conditions. Lost corners were relocated and reestablished at proportionate positions based on the [illegible] record and retirement data [illegible] thoroughly verified and only the true line 30 29 28 27 26 25 locations not[illegible] given herein. The directions of all lines were determined by means of fore- and bac[illegible] azimuths to the [illegible] from azimuths obtained from the [illegible] true between Triangulation Station [illegible], established in 1977 by the United States Coast and Geodetic Survey, and its 31 azimuth 32 [illegible] 33 of [illegible] 34 [illegible] with [illegible] solar 36 observations taken during the course of the survey. 35 The [illegible] section in [illegible] 1922 of the corner of sections 1, 2, 11, and 12, as determined by conventional reestablishment from the subdivision of section 1 18: page 12 Latitude: 44° 59' 52.95" N. Longitude: 113° 55' 59.64" W. The mean magnetic declination is 17° E. Form 9000-10a (November 1997) USDI-BLM FIELD NOTE PAPER				

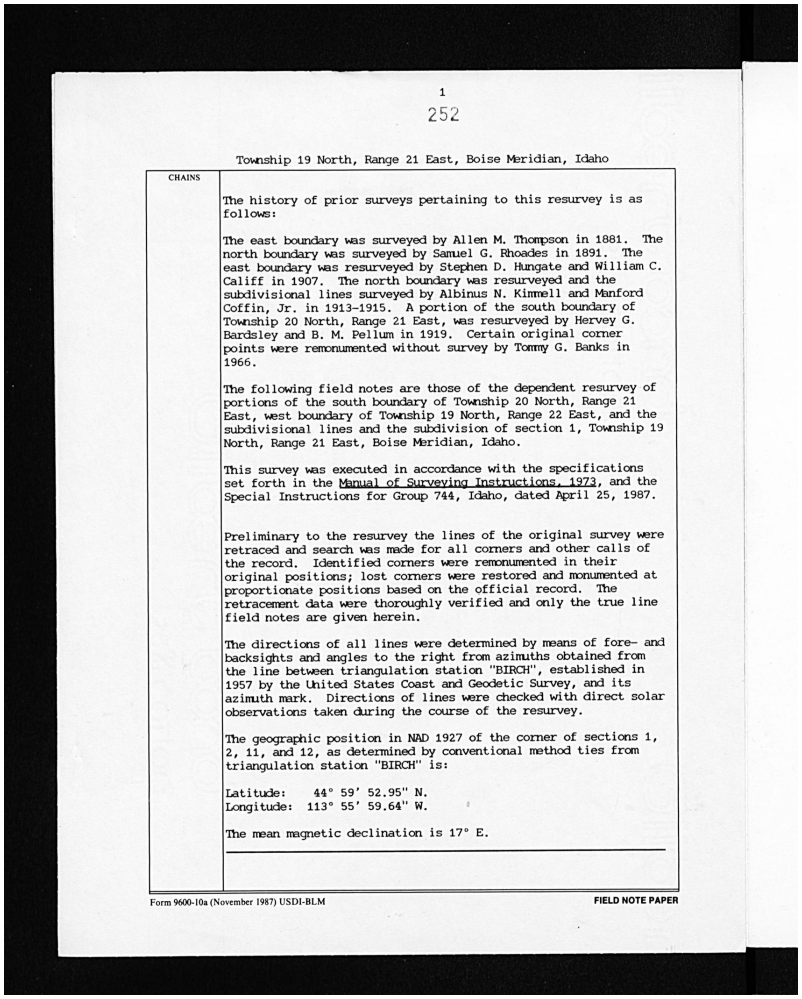

1

252

Township 19 North, Range 21 East, Boise Meridian, Idaho

CHAINS

The history of prior surveys pertaining to this resurvey is as follows:

The east boundary was surveyed by Allen M. Thompson in 1881. The north boundary was surveyed by Samuel G. Rhoades in 1891. The east boundary was resurveyed by Stephen D. Hungate and William C. Califf in 1907. The north boundary was resurveyed and the subdivisional lines surveyed by Albinus N. Kimmell and Manford Coffin, Jr. in 1913-1915. A portion of the south boundary of Township 20 North, Range 21 East, was resurveyed by Hervey G. Bardsley and B. M. Pellum in 1919. Certain original corner points were remonumented without survey by Tommy G. Banks in 1966.

The following field notes are those of the dependent resurvey of portions of the south boundary of Township 20 North, Range 21 East, west boundary of Township 19 North, Range 22 East, and the subdivisional lines and the subdivision of section 1, Township 19 North, Range 21 East, Boise Meridian, Idaho.

This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group 744, Idaho, dated April 25, 1987.

Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the official record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by means of fore- and backsights and angles to the right from azimuths obtained from the line between triangulation station "BIRCH", established in 1957 by the United States Coast and Geodetic Survey, and its azimuth mark. Directions of lines were checked with direct solar observations taken during the course of the resurvey.

The geographic position in NAD 1927 of the corner of sections 1, 2, 11, and 12, as determined by conventional method ties from triangulation station "BIRCH" is:

Latitude: 44° 59' 52.95" N.
Longitude: 113° 55' 59.64" W.

The mean magnetic declination is 17° E.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
3		●	1 252 Township 19 North, Range 21 East, Boise Meridian, Idaho CHAINS The history of prior surveys pertaining to this resurvey is as follows: The east boundary was surveyed by Allen M. Thompson in 1881. The north boundary was surveyed by Samuel G. Rhoades in 1891. The east boundary was resurveyed by Stephen D. Hungate and William C. Califf in 1907. The north boundary was resurveyed and the subdivisional lines surveyed by Albinus N. Kimmell and Manford Coffin, Jr. in 1913-1915. A portion of the south boundary of Township 20 North, Range 21 East, was resurveyed by Hervey G. Bardsley and B. M. Pellum in 1919. Certain original corner points were remonumented without survey by Tommy G. Banks in 1966. The following field notes are those of the dependent resurvey of portions of the south boundary of Township 20 North, Range 21 East, west boundary of Township 19 North, Range 22 East, and the subdivisional lines and the subdivision of section 1, Township 19 North, Range 21 East, Boise Meridian, Idaho. This survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group 744, Idaho, dated April 25, 1987. Preliminary to the resurvey the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the official record. The retracement data were thoroughly verified and only the true line field notes are given herein. The directions of all lines were determined by means of fore- and backsights and angles to the right from azimuths obtained from the line between triangulation station "BIRCH", established in 1957 by the United States Coast and Geodetic Survey, and its azimuth mark. Directions of lines were checked with direct solar observations taken during the course of the resurvey. The geographic position in NAD 1927 of the corner of sections 1, 2, 11, and 12, as determined by conventional method ties from triangulation station "BIRCH" is: Latitude: 44° 59' 52.95" N. Longitude: 113° 55' 59.64" W. The mean magnetic declination is 17° E. Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER				

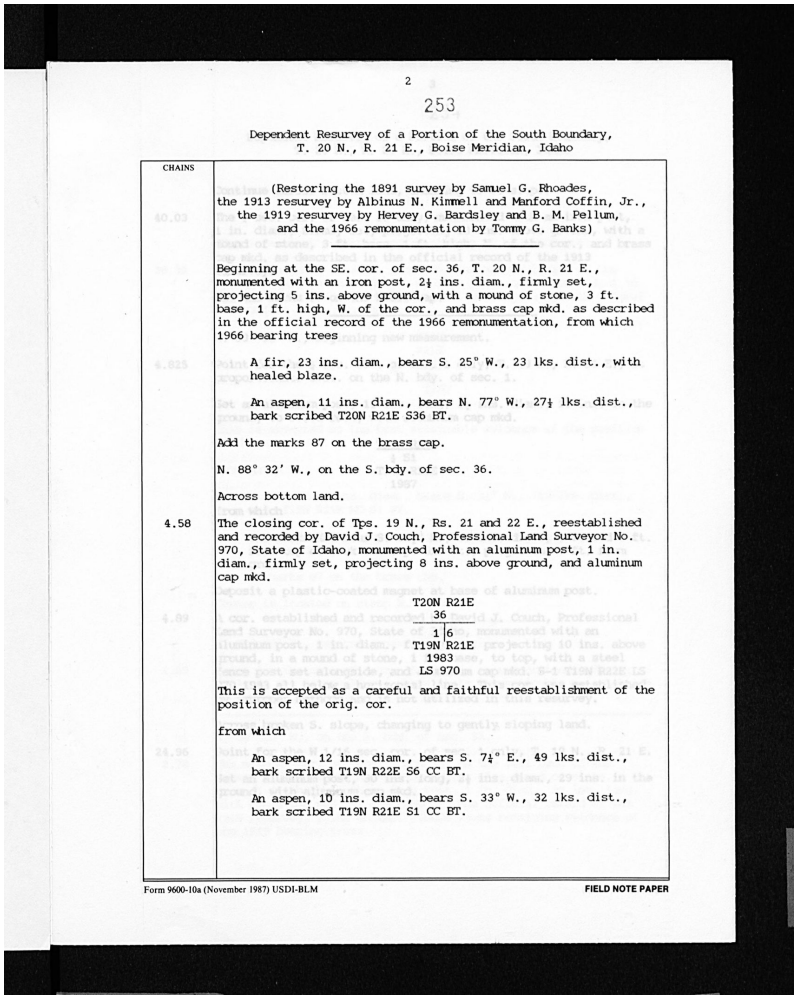

2

253

Dependent Resurvey of a Portion of the South Boundary,
T. 20 N., R. 21 E., Boise Meridian, Idaho

CHAINS

(Restoring the 1891 survey by Samuel G. Rhoades, the 1913 resurvey by Albinus N. Kimmell and Manford Coffin, Jr., the 1919 resurvey by Hervey G. Bardsley and B. M. Pellum, and the 1966 remonumentation by Tommy G. Banks)

Beginning at the SE. cor. of sec. 36, T. 20 N., R. 21 E., monumented with an iron post, 2½ ins. diam., firmly set, projecting 5 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor., and brass cap mkd. as described in the official record of the 1966 remonumentation, from which 1966 bearing trees

A fir, 23 ins. diam., bears S. 25° W., 23 lks. dist., with healed blaze.

An aspen, 11 ins. diam., bears N. 77° W., 27½ lks. dist., bark scribed T20N R21E S36 BT.

Add the marks 87 on the brass cap.

N. 88° 32' W., on the S. bdy. of sec. 36.

Across bottom land.

4.58 The closing cor. of Tps. 19 N., Rs. 21 and 22 E., reestablished and recorded by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an aluminum post, 1 in. diam., firmly set, projecting 8 ins. above ground, and aluminum cap mkd.

T20N R21E
36
1 | 6
T19N R21E
1983
LS 970

This is accepted as a careful and faithful reestablishment of the position of the orig. cor.

from which

An aspen, 12 ins. diam., bears S. 7½° E., 49 lks. dist., bark scribed T19N R22E S6 CC BT.

An aspen, 10 ins. diam., bears S. 33° W., 32 lks. dist., bark scribed T19N R21E S1 CC BT.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
4			Dependent Resurvey of a Portion of the South Boundary, T. 20 N., R. 21 E., Boise Meridian, Idaho				
5			(Restoring the 1891 survey by Samuel G. Rhoades, the 1913 resurvey by Albinus N. Kimmell and Manford Coffin, Jr., the 1919 resurvey by Hervey G. Bardsley and B. M. Pellum, and the 1966 remonumentation by Tommy G. Banks)				
6		△	**¼ Cor. Sec. 36 N · Beginning at the SE. cor. of sec. 36, T. 20 N., R. 21 E., monumented with an iron post, 2½ ins. diam., firmly set, projecting 5 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, W. of the cor., and brass cap mkd. as described in the official record of the 1966 remonumentation, from which 1966 bearing trees A fir, 23 ins. diam., bears S. 25° W., 23 lks. dist., with healed blaze. An aspen, 11 ins. diam., bears N. 77° W., 27½ lks. dist., bark scribed T20N R21E S36 BT. Add the marks 87 on the brass cap.**				640200
7			N. 88° 32' W., on the S. bdy. of sec. 36.				
8		●	Across bottom land.				
9	4.58	○	**The closing cor. of Tps. 19 N., Rs. 21 and 22 E., reestablished and recorded by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an aluminum post, 1 in. diam., firmly set, projecting 8 ins. above ground, and aluminum cap mkd. T20N R21E 36 1|6 T19N R21E 1983 LS 970 This is accepted as a careful and faithful reestablishment of the position of the orig. cor. from which An aspen, 12 ins. diam., bears S. 7½° E., 49 lks. dist., bark scribed T19N R22E S6 CC BT. An aspen, 10 ins. diam., bears S. 33° W., 32 lks. dist., bark scribed T19N R21E S1 CC BT.**				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 3 calls without a location

Numbers match the text table; only this scan page is shown.

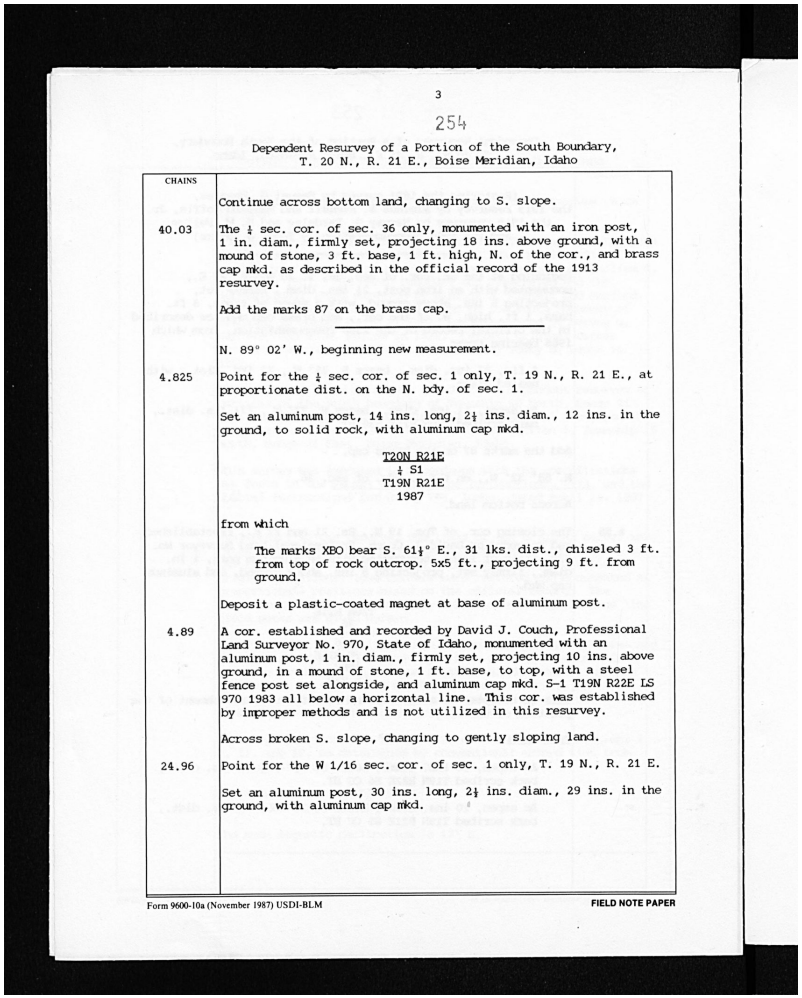

3

254

Dependent Resurvey of a Portion of the South Boundary,
T. 20 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
	Continue across bottom land, changing to S. slope.
40.03	The ¼ sec. cor. of sec. 36 only, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, N. of the cor., and brass cap mkd. as described in the official record of the 1913 resurvey. Add the marks 87 on the brass cap.
	N. 89° 02' W., beginning new measurement.
4.825	Point for the ¼ sec. cor. of sec. 1 only, T. 19 N., R. 21 E., at proportionate dist. on the N. bdy. of sec. 1. Set an aluminum post, 14 ins. long, 2½ ins. diam., 12 ins. in the ground, to solid rock, with aluminum cap mkd. T20N R21E ¼ S1 T19N R21E 1987 from which The marks XBO bear S. 61½° E., 31 lks. dist., chiseled 3 ft. from top of rock outcrop. 5x5 ft., projecting 9 ft. from ground. Deposit a plastic-coated magnet at base of aluminum post.
4.89	A cor. established and recorded by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an aluminum post, 1 in. diam., firmly set, projecting 10 ins. above ground, in a mound of stone, 1 ft. base, to top, with a steel fence post set alongside, and aluminum cap mkd. S-1 T19N R22E LS 970 1983 all below a horizontal line. This cor. was established by improper methods and is not utilized in this resurvey. Across broken S. slope, changing to gently sloping land.
24.96	Point for the W 1/16 sec. cor. of sec. 1 only, T. 19 N., R. 21 E. Set an aluminum post, 30 ins. long, 2½ ins. diam., 29 ins. in the ground, with aluminum cap mkd.

Form 9600-10a (November 1987) USDI-BLM — FIELD NOTE PAPER

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
10			Dependent Resurvey of a Portion of the South Boundary, T. 20 N., R. 21 E., Boise Meridian, Idaho				
11		●	Continue across bottom land, changing to S. slope.				
12	40.03	△	**¼ Cor. Sec. 36 N · The ½ sec. cor. of sec. 36 only, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, N. of the cor., and brass cap mkd. as described in the official record of the 1913 resurvey. Add the marks 87 on the brass cap.**				640200
13			N. 89° 02' W., beginning new measurement.				
14	4.83	△	**Point for the ½ sec. cor. of sec. 1 only, T. 19 N., R. 21 E., at proportionate dist. on the N. bdy. of sec. 1. Set an aluminum post, 14 ins. long, 2½ ins. diam., 12 ins. in the ground, to solid rock, with aluminum cap mkd. T20N R21E ½ S1 T19N R21E 1987 from which The marks XBO bear S. 61½° E., 31 lks. dist., chiseled 3 ft. from top of rock outcrop. 5x5 ft., projecting 9 ft. from ground. Deposit a plastic-coated magnet at base of aluminum post.**				
15	4.89	●	A cor. established and recorded by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an aluminum post, 1 in. diam., firmly set, projecting 10 ins. above ground, in a mound of stone, 1 ft. base, to top, with a steel fence post set alongside, and aluminum cap mkd. S-1 T19N R22E LS 970 1983 all below a horizontal line. This cor. was established by improper methods and is not utilized in this resurvey. Across broken S. slope, changing to gently sloping land.				
16	24.96	○	**Point for the W 1/16 sec. cor. of sec. 1 only, T. 19 N., R. 21 E. Set an aluminum post, 30 ins. long, 2½ ins. diam., 29 ins. in the ground, with aluminum cap mkd.**				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 5 calls without a location

Numbers match the text table; only this scan page is shown.

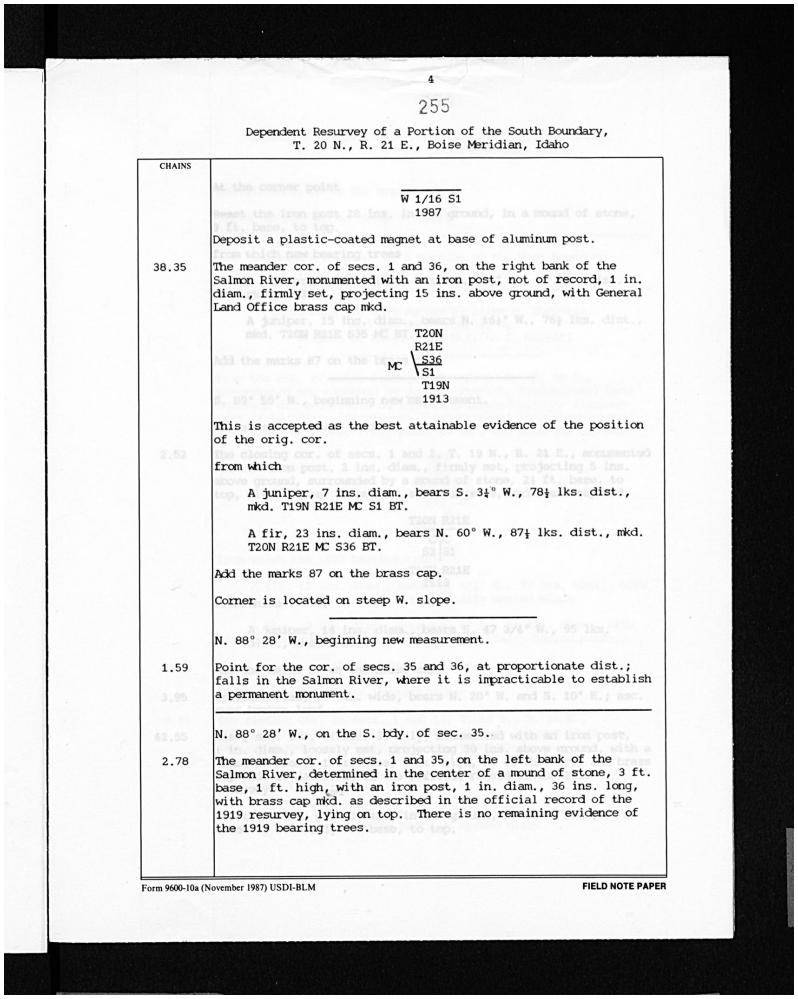

4

255

Dependent Resurvey of a Portion of the South Boundary,
T. 20 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
	W 1/16 S1 1987 Deposit a plastic-coated magnet at base of aluminum post.
38.35	The meander cor. of secs. 1 and 36, on the right bank of the Salmon River, monumented with an iron post, not of record, 1 in. diam., firmly set, projecting 15 ins. above ground, with General Land Office brass cap mkd. MC T20N R21E S36 / S1 T19N 1913 This is accepted as the best attainable evidence of the position of the orig. cor. from which A juniper, 7 ins. diam., bears S. 3¼° W., 78½ lks. dist., mkd. T19N R21E MC S1 BT. A fir, 23 ins. diam., bears N. 60° W., 87½ lks. dist., mkd. T20N R21E MC S36 BT. Add the marks 87 on the brass cap. Corner is located on steep W. slope.
	N. 88° 28' W., beginning new measurement.
1.59	Point for the cor. of secs. 35 and 36, at proportionate dist.; falls in the Salmon River, where it is impracticable to establish a permanent monument.
	N. 88° 28' W., on the S. bdy. of sec. 35.
2.78	The meander cor. of secs. 1 and 35, on the left bank of the Salmon River, determined in the center of a mound of stone, 3 ft. base, 1 ft. high, with an iron post, 1 in. diam., 36 ins. long, with brass cap mkd. as described in the official record of the 1919 resurvey, lying on top. There is no remaining evidence of the 1919 bearing trees.

Form 9600-10a (November 1987) USDI-BLM — FIELD NOTE PAPER


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
17			Dependent Resurvey of a Portion of the South Boundary, T. 20 N., R. 21 E., Boise Meridian, Idaho				
18		●	At the corner point W 1/16 S1 west the iron post 16 ins. [?] ground, in a mound of stone, [?] ft. base, [?] ins. [?] 1987 Deposit a plastic-coated magnet at base of aluminum post.				
19	38.35	△	**The meander cor. of secs. 1 and 36, on the right bank of the Salmon River, monumented with an iron post, not of record, 1 in. diam., firmly set, projecting 15 ins. above ground, with General Land Office brass cap mkd. T20N R21E MC S36 S1 T19N 1913 [?] 88° 89' W., beginning new [?] monument. This is accepted as the best attainable evidence of the position of the orig. cor.**				
20	2.52	▲	**Cor. Secs. 1-8 · [?] cor. at secs. 1 and 8, T. 19 N., R. 21 E., monumented from which [?] post, 2 ins. diam., firmly set, projecting 5 ins. above [?] A juniper, 7 ins. diam., bears S. 3½° W., 78½ lks. dist., mkd. T19N R21E MC S1 BT. A fir, 23 ins. diam., bears N. 60° W., 87½ lks. dist., mkd. T20N R21E MC S36 BT. Add the marks 87 on the brass cap. Corner is located on steep W. slope.**				
21			N. 88° 28' W., beginning new measurement.				
22	1.59	▲	**Cor. Secs. 35-36 · Point for the cor. of secs. 35 and 36, at proportionate dist.; falls in the Salmon River, where it is impracticable to establish a permanent monument.**				600100
23	3.95	●	N. 88° 28' W., on the S. bdy. of sec. 35. [?] with an iron post, [?]lly.				
24	2.78		Salmon River · The meander cor. of secs. 1 and 35, on the left bank of the Salmon River, determined in the center of a mound of stone, 3 ft. base, 1 ft. high, with an iron post, 1 in. diam., 36 ins. long, with brass cap mkd. as described in the official record of the 1919 resurvey, lying on top. There is no remaining evidence of the 1919 bearing trees. [?], to top.				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 5 calls without a location

Numbers match the text table; only this scan page is shown.

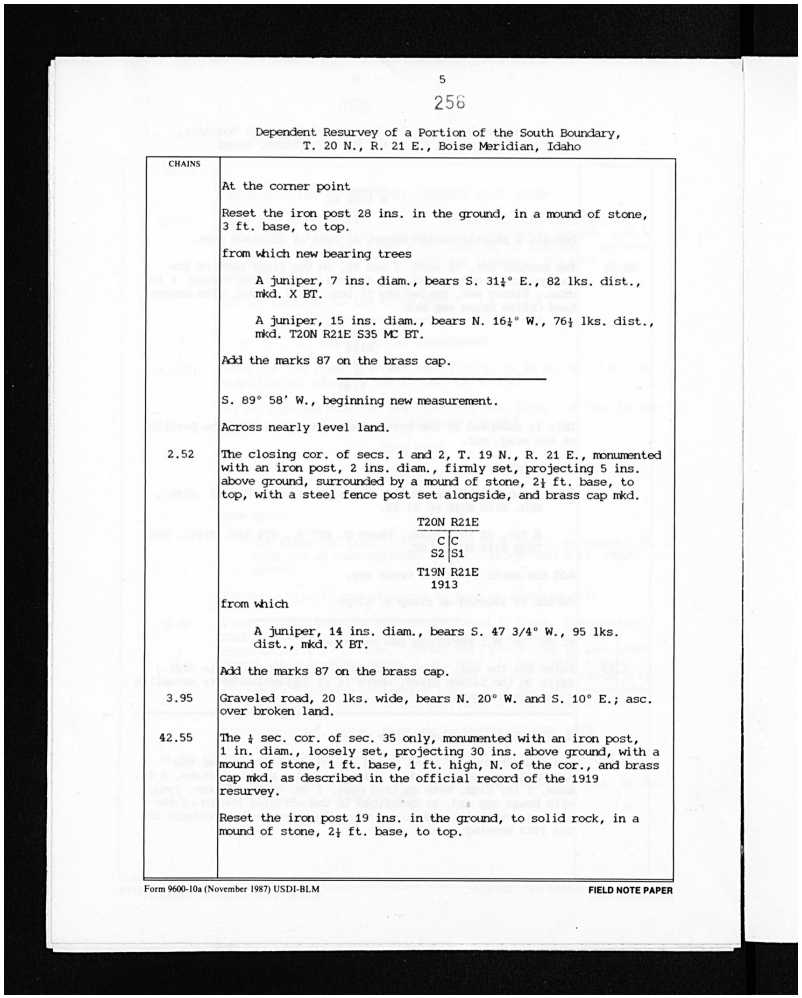

5

256

Dependent Resurvey of a Portion of the South Boundary,
T. 20 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
	At the corner point
	Reset the iron post 28 ins. in the ground, in a mound of stone, 3 ft. base, to top.
	from which new bearing trees
	A juniper, 7 ins. diam., bears S. 31¼° E., 82 lks. dist., mkd. X BT.
	A juniper, 15 ins. diam., bears N. 16¼° W., 76¼ lks. dist., mkd. T20N R21E S35 MC BT.
	Add the marks 87 on the brass cap.
	S. 89° 58' W., beginning new measurement.
	Across nearly level land.
2.52	The closing cor. of secs. 1 and 2, T. 19 N., R. 21 E., monumented with an iron post, 2 ins. diam., firmly set, projecting 5 ins. above ground, surrounded by a mound of stone, 2½ ft. base, to top, with a steel fence post set alongside, and brass cap mkd. T20N R21E C|C S2|S1 T19N R21E 1913
	from which
	A juniper, 14 ins. diam., bears S. 47 3/4° W., 95 lks. dist., mkd. X BT.
	Add the marks 87 on the brass cap.
3.95	Graveled road, 20 lks. wide, bears N. 20° W. and S. 10° E.; asc. over broken land.
42.55	The ¼ sec. cor. of sec. 35 only, monumented with an iron post, 1 in. diam., loosely set, projecting 30 ins. above ground, with a mound of stone, 1 ft. base, 1 ft. high, N. of the cor., and brass cap mkd. as described in the official record of the 1919 resurvey.
	Reset the iron post 19 ins. in the ground, to solid rock, in a mound of stone, 2½ ft. base, to top.

Form 9600-10a (November 1987) USDI-BLM — FIELD NOTE PAPER

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
25			Dependent Resurvey of a Portion of the South Boundary, T. 20 N., R. 21 E., Boise Meridian, Idaho				
26			At the corner point				
27		●	Reset the iron post 28 ins. in the ground, in a mound of stone, 3 ft. base, to top.				
28		●	from which new bearing trees A juniper, 7 ins. diam., bears S. 31½° E., 82 lks. dist., mkd. X BT. A juniper, 15 ins. diam., bears N. 16½° W., 76½ lks. dist., mkd. T20N R21E S35 MC BT.				
29		●	Add the marks 87 on the brass cap.				
30			S. 89° 58' W., beginning new measurement.				
31		●	Across nearly level land.				
32	2.52	▲	**Cor. Secs. 1-2 · The closing cor. of secs. 1 and 2, T. 19 N., R. 21 E., monumented with an iron post, 2 ins. diam., firmly set, projecting 5 ins. above ground, surrounded by a mound of stone, 2½ ft. base, to top, with a steel fence post set alongside, and brass cap mkd. T20N R21E C|C S2|S1 T19N R21E 1913 from which A juniper, 14 ins. diam., bears S. 47 3/4° W., 95 lks. dist., mkd. X BT.**				600700
33		●	Add the marks 87 on the brass cap.				
34	3.95	■	Graveled road, 20 lks. wide, bears N. 20° W. and S. 10° E.; asc. over broken land.				
35	42.55	△	**¼ Cor. Sec. 35 N · The ¼ sec. cor. of sec. 35 only, monumented with an iron post, 1 in. diam., loosely set, projecting 30 ins. above ground, with a mound of stone, 1 ft. base, 1 ft. high, N. of the cor., and brass cap mkd. as described in the official record of the 1919 resurvey. Reset the iron post 19 ins. in the ground, to solid rock, in a mound of stone, 2½ ft. base, to top.**				540200


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 8 calls without a location

Numbers match the text table; only this scan page is shown.

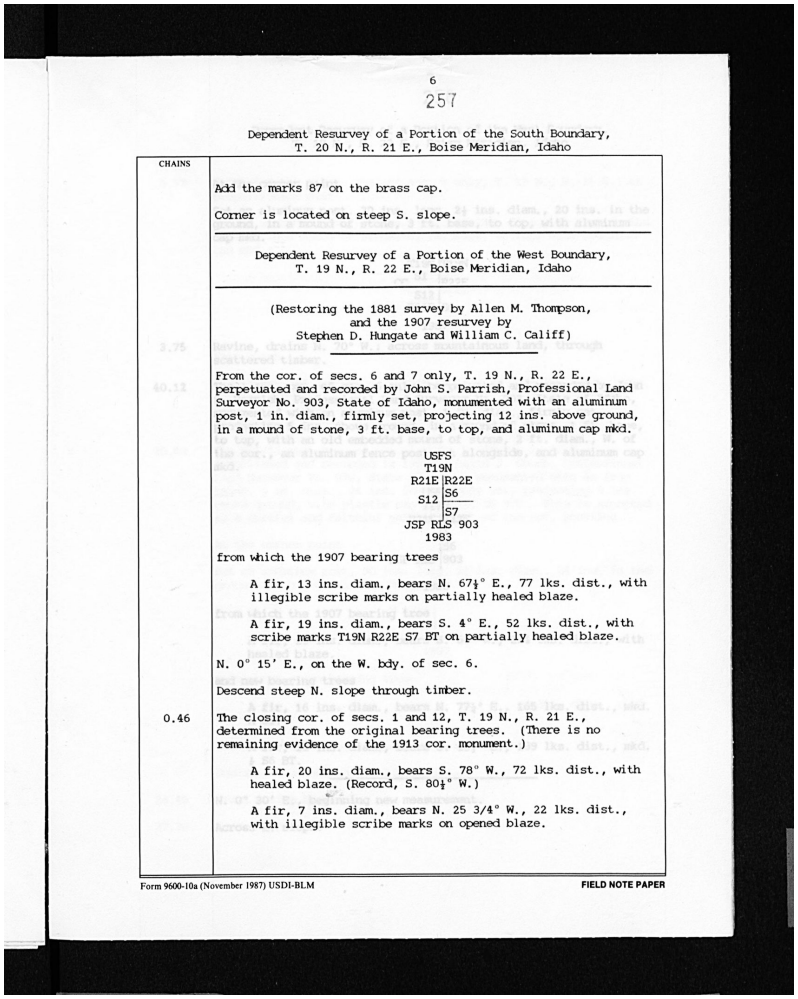

6

257

Dependent Resurvey of a Portion of the South Boundary,
T. 20 N., R. 21 E., Boise Meridian, Idaho

CHAINS

Add the marks 87 on the brass cap.

Corner is located on steep S. slope.

Dependent Resurvey of a Portion of the West Boundary,
T. 19 N., R. 22 E., Boise Meridian, Idaho

(Restoring the 1881 survey by Allen M. Thompson,
and the 1907 resurvey by
Stephen D. Hungate and William C. Califf)

From the cor. of secs. 6 and 7 only, T. 19 N., R. 22 E., perpetuated and recorded by John S. Parrish, Professional Land Surveyor No. 903, State of Idaho, monumented with an aluminum post, 1 in. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 3 ft. base, to top, and aluminum cap mkd.

USFS
T19N
R21E | R22E
S12 | S6
S7
JSP RLS 903
1983

from which the 1907 bearing trees

A fir, 13 ins. diam., bears N. 67½° E., 77 lks. dist., with illegible scribe marks on partially healed blaze.

A fir, 19 ins. diam., bears S. 4° E., 52 lks. dist., with scribe marks T19N R22E S7 BT on partially healed blaze.

N. 0° 15' E., on the W. bdy. of sec. 6.

Descend steep N. slope through timber.

0.46 The closing cor. of secs. 1 and 12, T. 19 N., R. 21 E., determined from the original bearing trees. (There is no remaining evidence of the 1913 cor. monument.)

A fir, 20 ins. diam., bears S. 78° W., 72 lks. dist., with healed blaze. (Record, S. 80¼° W.)

A fir, 7 ins. diam., bears N. 25 3/4° W., 22 lks. dist., with illegible scribe marks on opened blaze.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
36			Dependent Resurvey of a Portion of the South Boundary, T. 20 N., R. 21 E., Boise Meridian, Idaho				
37		●	Add the marks 87 on the brass cap.				
38		●	Corner is located on steep S. slope.				
39			Dependent Resurvey of a Portion of the West Boundary, T. 19 N., R. 22 E., Boise Meridian, Idaho				
40			(Restoring the 1881 survey by Allen M. Thompson, and the 1907 resurvey by Stephen D. Hungate and William C. Califf)				
41	3.75	●	[illegible] having, drains [illegible] through [illegible] scattered timber				
42	40.13	△	**Cor. Secs. 6-7 · From the cor. of secs. 6 and 7 only, T. 19 N., R. 22 E., perpetuated and recorded by John S. Parrish, Professional Land Surveyor No. 903, State of Idaho, monumented with an aluminum post, 1 in. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 3 ft. base, to top, and aluminum cap mkd. [illegible] the mkt., an aluminum fence post alongside, and aluminum cap mkd. USFS T19N R21E R22E S12 S6 S7 JSP RLS 903 1983 from which the 1907 bearing trees A fir, 13 ins. diam., bears N. 67½° E., 77 lks. dist., with illegible scribe marks on partially healed blaze. A fir, 19 ins. diam., bears S. 4° E., 52 lks. dist., with scribe marks T19N R22E S7 BT on partially healed blaze.**				100600
43			N. 0° 15' E., on the W. bdy. of sec. 6.				
44		●	Descend steep N. slope through timber.				
45	0.46	▲	**Cor. Secs. 1-12 · The closing cor. of secs. 1 and 12, T. 19 N., R. 21 E., determined from the original bearing trees. (There is no remaining evidence of the 1913 cor. monument.) A fir, 20 ins. diam., bears S. 78° W., 72 lks. dist., with healed blaze. (Record, S. 80½° W.) A fir, 7 ins. diam., bears N. 25 3/4° W., 22 lks. dist., with illegible scribe marks on opened blaze.**				700600

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 6 calls without a location

Numbers match the text table; only this scan page is shown.

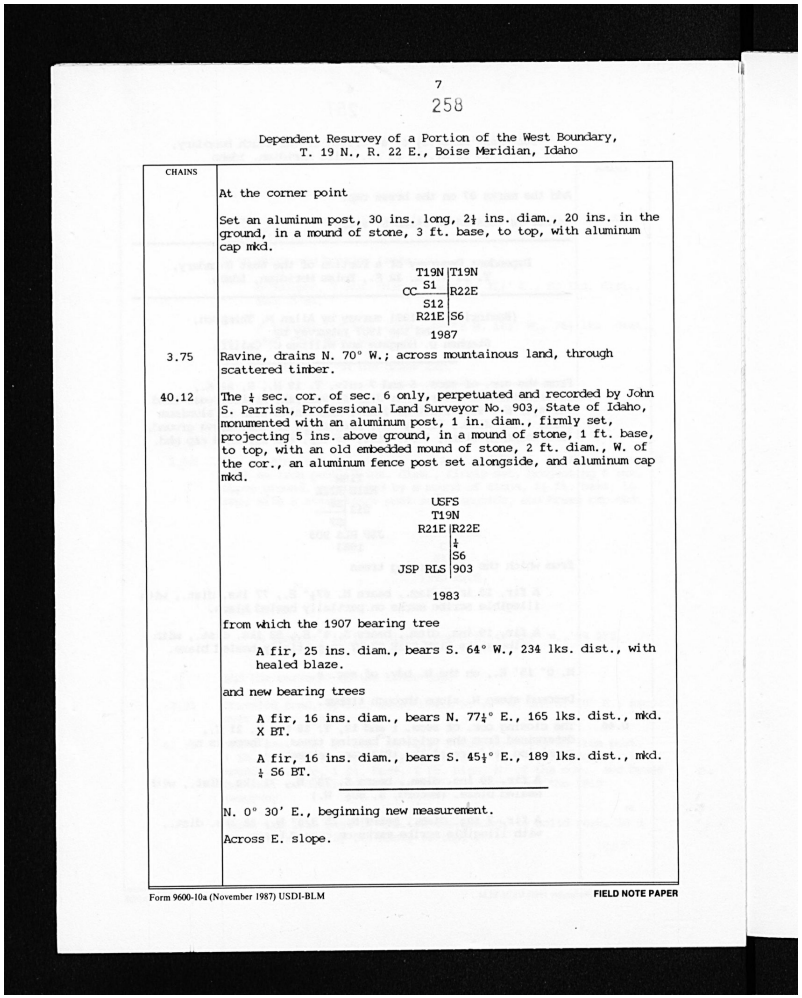

7

258

Dependent Resurvey of a Portion of the West Boundary,
T. 19 N., R. 22 E., Boise Meridian, Idaho

CHAINS

At the corner point

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.

T19N \| T19N
CC S1 \| R22E
S12 \|
R21E \| S6
1987

3.75 Ravine, drains N. 70° W.; across mountainous land, through scattered timber.

40.12 The ¼ sec. cor. of sec. 6 only, perpetuated and recorded by John S. Parrish, Professional Land Surveyor No. 903, State of Idaho, monumented with an aluminum post, 1 in. diam., firmly set, projecting 5 ins. above ground, in a mound of stone, 1 ft. base, to top, with an old embedded mound of stone, 2 ft. diam., W. of the cor., an aluminum fence post set alongside, and aluminum cap mkd.

USFS
T19N
R21E \| R22E
¼
S6
JSP RLS \| 903
1983

from which the 1907 bearing tree

A fir, 25 ins. diam., bears S. 64° W., 234 lks. dist., with healed blaze.

and new bearing trees

A fir, 16 ins. diam., bears N. 77½° E., 165 lks. dist., mkd. X BT.

A fir, 16 ins. diam., bears S. 45½° E., 189 lks. dist., mkd. ¼ S6 BT.

N. 0° 30' E., beginning new measurement.

Across E. slope.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
46			Dependent Resurvey of a Portion of the West Boundary, T. 19 N., R. 22 E., Boise Meridian, Idaho				
47			At the corner point				
48		○	**Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd. T19N |T19N CC S1 R22E S12 R21E |S6 1987**				
49	3.75	●	Ravine, drains N. 70° W. · Ravine, drains N. 70° W.; across mountainous land, through scattered timber.				
50	40.12	△	**The ¼ sec. cor. of sec. 6 only, perpetuated and recorded by John S. Parrish, Professional Land Surveyor No. 903, State of Idaho, monumented with an aluminum post, 1 in. diam., firmly set, projecting 5 ins. above ground, in a mound of stone, 1 ft. base, to top, with an old embedded mound of stone, 2 ft. diam., W. of the cor., an aluminum fence post set alongside, and aluminum cap mkd. USFS T19N R21E |R22E ¼ |S6 JSP RLS |903 1983 from which the 1907 bearing tree A fir, 25 ins. diam., bears S. 64° W., 234 lks. dist., with healed blaze. and new bearing trees A fir, 16 ins. diam., bears N. 77½° E., 165 lks. dist., mkd. X BT. A fir, 16 ins. diam., bears S. 45½° E., 189 lks. dist., mkd. ¼ S6 BT.**				
51			N. 0° 30' E., beginning new measurement.				
52		●	Across E. slope.				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 4 calls without a location

Numbers match the text table; only this scan page is shown.

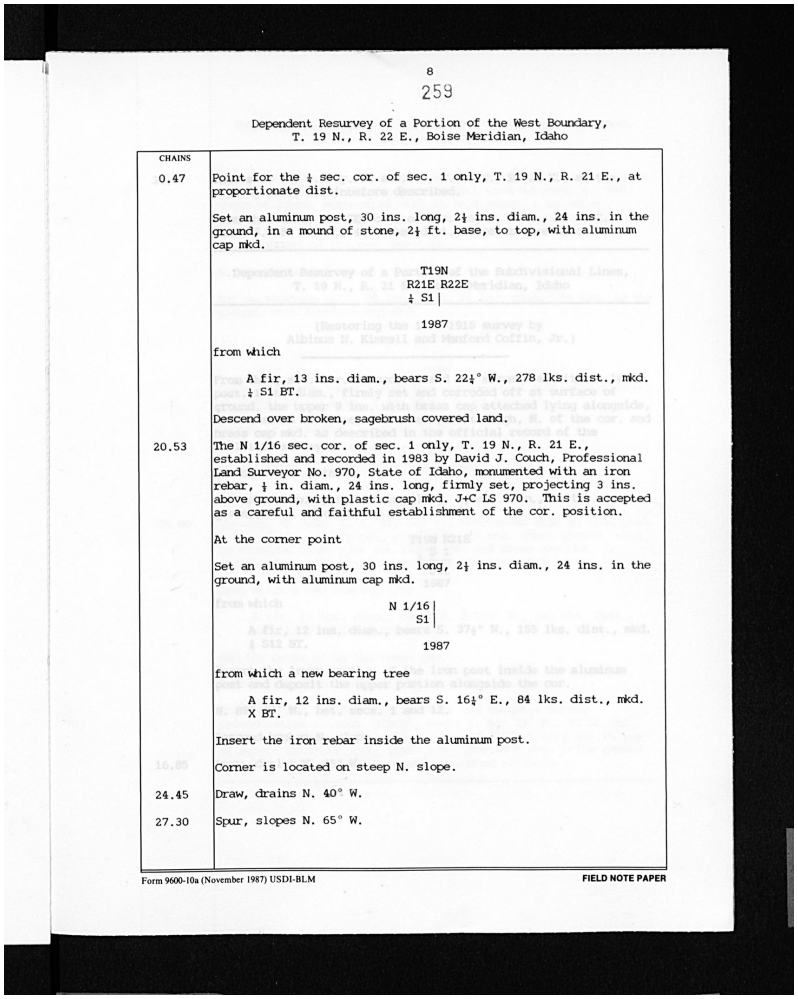

8

259

Dependent Resurvey of a Portion of the West Boundary,
T. 19 N., R. 22 E., Boise Meridian, Idaho

CHAINS	
0.47	Point for the ¼ sec. cor. of sec. 1 only, T. 19 N., R. 21 E., at proportionate dist. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a mound of stone, 2½ ft. base, to top, with aluminum cap mkd. T19N R21E R22E ¼ S1 | 1987 from which A fir, 13 ins. diam., bears S. 22½° W., 278 lks. dist., mkd. ¼ S1 BT. Descend over broken, sagebrush covered land.
20.53	The N 1/16 sec. cor. of sec. 1 only, T. 19 N., R. 21 E., established and recorded in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., 24 ins. long, firmly set, projecting 3 ins. above ground, with plastic cap mkd. J+C LS 970. This is accepted as a careful and faithful establishment of the cor. position. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. N 1/16 | S1 | 1987 from which a new bearing tree A fir, 12 ins. diam., bears S. 16½° E., 84 lks. dist., mkd. X BT. Insert the iron rebar inside the aluminum post. Corner is located on steep N. slope.
24.45	Draw, drains N. 40° W.
27.30	Spur, slopes N. 65° W.

Form 9600-10a (November 1987) USDI-BLM — FIELD NOTE PAPER

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
53			Dependent Resurvey of a Portion of the West Boundary, T. 19 N., R. 22 E., Boise Meridian, Idaho				
54	0.47	△	**Point for the ¼ sec. cor. of sec. 1 only, T. 19 N., R. 21 E., at proportionate dist. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a mound of stone, 2½ ft. base, to top, with aluminum cap mkd. T19N R21E R22E ¼ S1 1987 from which A fir, 13 ins. diam., bears S. 22½° W., 278 lks. dist., mkd. ¼ S1 BT.**				
55		●	Descend over broken, sagebrush covered land.				
56	20.53	◯	**The N 1/16 sec. cor. of sec. 1 only, T. 19 N., R. 21 E., established and recorded in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., 24 ins. long, firmly set, projecting 3 ins. above ground, with plastic cap mkd. J+C LS 970. This is accepted as a careful and faithful establishment of the cor. position. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. N 1/16 S1 1987 from which a new bearing tree A fir, 12 ins. diam., bears S. 16½° E., 84 lks. dist., mkd. X BT. Insert the iron rebar inside the aluminum post. Corner is located on steep N. slope.**				
57	24.45	◉	Draw, drains N. 40° W.				
58	27.30	●	Spur, slopes N. 65° W.				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 5 calls without a location

Numbers match the text table; only this scan page is shown.

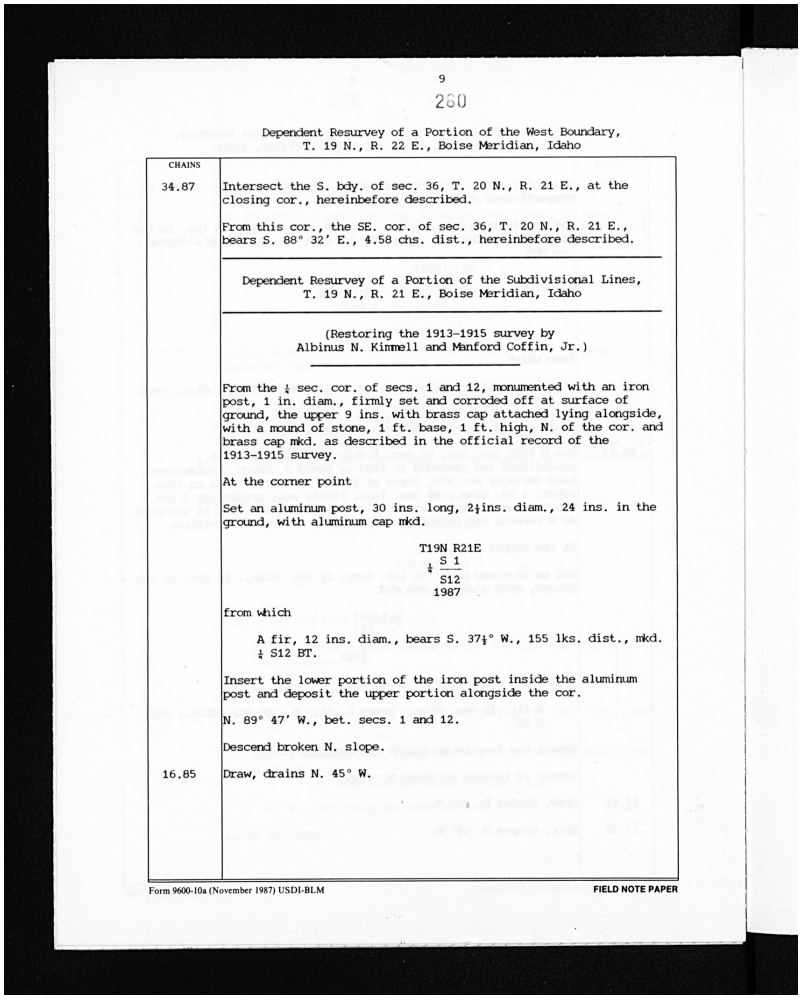

9

260

Dependent Resurvey of a Portion of the West Boundary,
T. 19 N., R. 22 E., Boise Meridian, Idaho

CHAINS	
34.87	Intersect the S. bdy. of sec. 36, T. 20 N., R. 21 E., at the closing cor., hereinbefore described. From this cor., the SE. cor. of sec. 36, T. 20 N., R. 21 E., bears S. 88° 32' E., 4.58 chs. dist., hereinbefore described.
	Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 21 E., Boise Meridian, Idaho
	(Restoring the 1913-1915 survey by Albinus N. Kimmell and Manford Coffin, Jr.)
	From the ¼ sec. cor. of secs. 1 and 12, monumented with an iron post, 1 in. diam., firmly set and corroded off at surface of ground, the upper 9 ins. with brass cap attached lying alongside, with a mound of stone, 1 ft. base, 1 ft. high, N. of the cor. and brass cap mkd. as described in the official record of the 1913-1915 survey. At the corner point Set an aluminum post, 30 ins. long, 2½ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R21E ¼ S 1 S12 1987 from which A fir, 12 ins. diam., bears S. 37½° W., 155 lks. dist., mkd. ¼ S12 BT. Insert the lower portion of the iron post inside the aluminum post and deposit the upper portion alongside the cor. N. 89° 47' W., bet. secs. 1 and 12. Descend broken N. slope.
16.85	Draw, drains N. 45° W.

Form 9600-10a (November 1987) USDI-BLM — FIELD NOTE PAPER

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
59			Dependent Resurvey of a Portion of the West Boundary, T. 19 N., R. 22 E., Boise Meridian, Idaho				
60	34.87	▲	**Cor. Secs. 1-12-36 · Intersect the S. bdy. of sec. 36, T. 20 N., R. 21 E., at the closing cor., hereinbefore described. From this cor., the SE. cor. of sec. 36, T. 20 N., R. 21 E., bears S. 88° 32' E., 4.58 chs. dist., hereinbefore described.**				100600
61			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 21 E., Boise Meridian, Idaho				
62			(Restoring the 1913-1915 survey by Albinus N. Kimmell and Manford Coffin, Jr.)				
63		△	**From the ¼ sec. cor. of secs. 1 and 12, monumented with an iron post, 1 in. diam., firmly set and corroded off at surface of ground, the upper 9 ins. with brass cap attached lying alongside, with a mound of stone, 1 ft. base, 1 ft. high, N. of the cor. and brass cap mkd. as described in the official record of the 1913-1915 survey. At the corner point Set an aluminum post, 30 ins. long, 2½ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R21E ¼ S 1 S12 1987 from which A fir, 12 ins. diam., bears S. 37½° W., 155 lks. dist., mkd. ¼ S12 BT. Insert the lower portion of the iron post inside the aluminum post and deposit the upper portion alongside the cor. N. 89° 47' W., bet. secs. 1 and 12. Descend broken N. slope.**				
64	16.85	●	Draw, drains N. 45° W.				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 3 calls without a location

Numbers match the text table; only this scan page is shown.

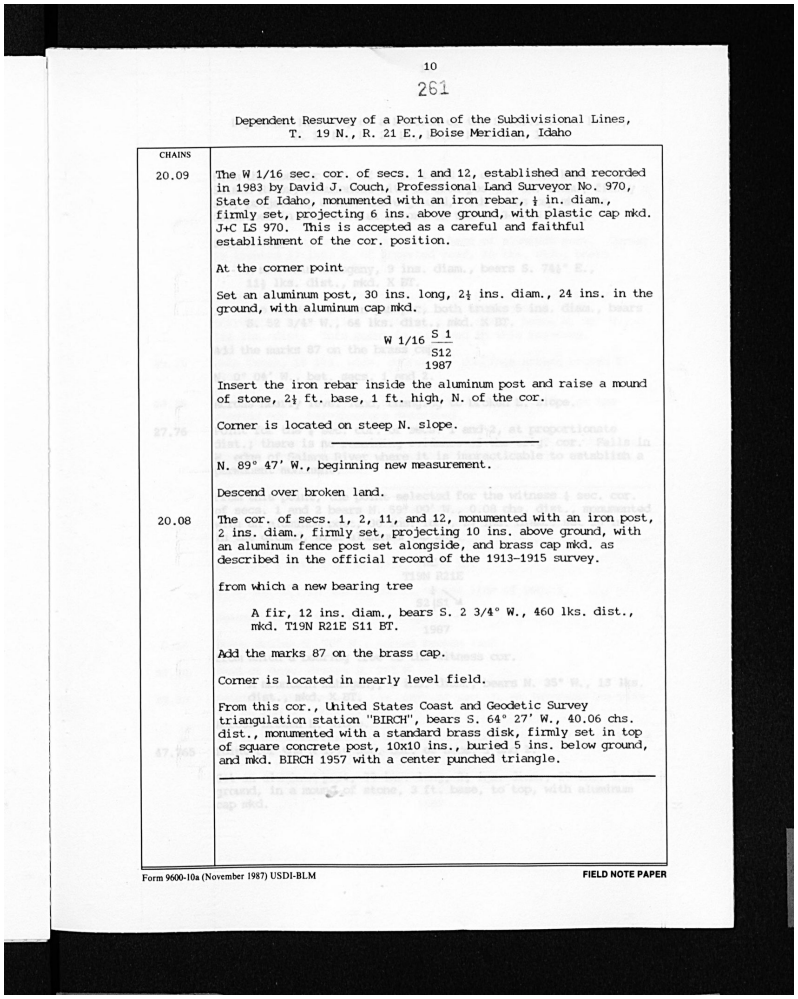

10

261

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 19 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
20.09	The W 1/16 sec. cor. of secs. 1 and 12, established and recorded in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., firmly set, projecting 6 ins. above ground, with plastic cap mkd. J+C LS 970. This is accepted as a careful and faithful establishment of the cor. position. At the corner point Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. W 1/16 S 1 / S12 / 1987 Insert the iron rebar inside the aluminum post and raise a mound of stone, 2½ ft. base, 1 ft. high, N. of the cor. Corner is located on steep N. slope.
27.76	N. 89° 47' W., beginning new measurement. Descend over broken land.
20.08	The cor. of secs. 1, 2, 11, and 12, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with an aluminum fence post set alongside, and brass cap mkd. as described in the official record of the 1913-1915 survey. from which a new bearing tree A fir, 12 ins. diam., bears S. 2 3/4° W., 460 lks. dist., mkd. T19N R21E S11 BT. Add the marks 87 on the brass cap. Corner is located in nearly level field. From this cor., United States Coast and Geodetic Survey triangulation station "BIRCH", bears S. 64° 27' W., 40.06 chs. dist., monumented with a standard brass disk, firmly set in top of square concrete post, 10x10 ins., buried 5 ins. below ground, and mkd. BIRCH 1957 with a center punched triangle.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 4 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
65			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 21 E., Boise Meridian, Idaho				
66	20.09	○	**Cor. Secs. 1-12 · The W 1/16 sec. cor. of secs. 1 and 12, established and recorded in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., firmly set, projecting 6 ins. above ground, with plastic cap mkd. J+C LS 970. This is accepted as a careful and faithful establishment of the cor. position. At the corner point [illegible], bears S. 74[?]° E., [illegible] A BT. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. W 1/16 S 1 S12 1987 [illegible] the marks 87 on the [illegible] Insert the iron rebar inside the aluminum post and raise a mound of stone, 2½ ft. base, 1 ft. high, N. of the cor.**				700600
67	27.76	●	Corner is located on steep N. slope. [illegible] N. 89° 47' W., beginning new measurement. Descend over broken land.				
68	20.08	▲	**Cor. Secs. 1-2-11-12 · The cor. of secs. 1, 2, 11, and 12, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with an aluminum fence post set alongside, and brass cap mkd. as described in the official record of the 1913-1915 survey. from which a new bearing tree A fir, 12 ins. diam., bears S. 2 3/4° W., 460 lks. dist., mkd. T19N R21E S11 BT. 1987 Add the marks 87 on the brass cap. Corner is located in nearly level field. From this cor., United States Coast and Geodetic Survey triangulation station "BIRCH", bears S. 64° 27' W., 40.06 chs. dist., monumented with a standard brass disk, firmly set in top of square concrete post, 10x10 ins., buried 5 ins. below ground, and mkd. BIRCH 1957 with a center punched triangle.**				600600
69		●	[illegible] mound, in a mound of stone, 4 ft. base, to top, with aluminum cap mkd.				

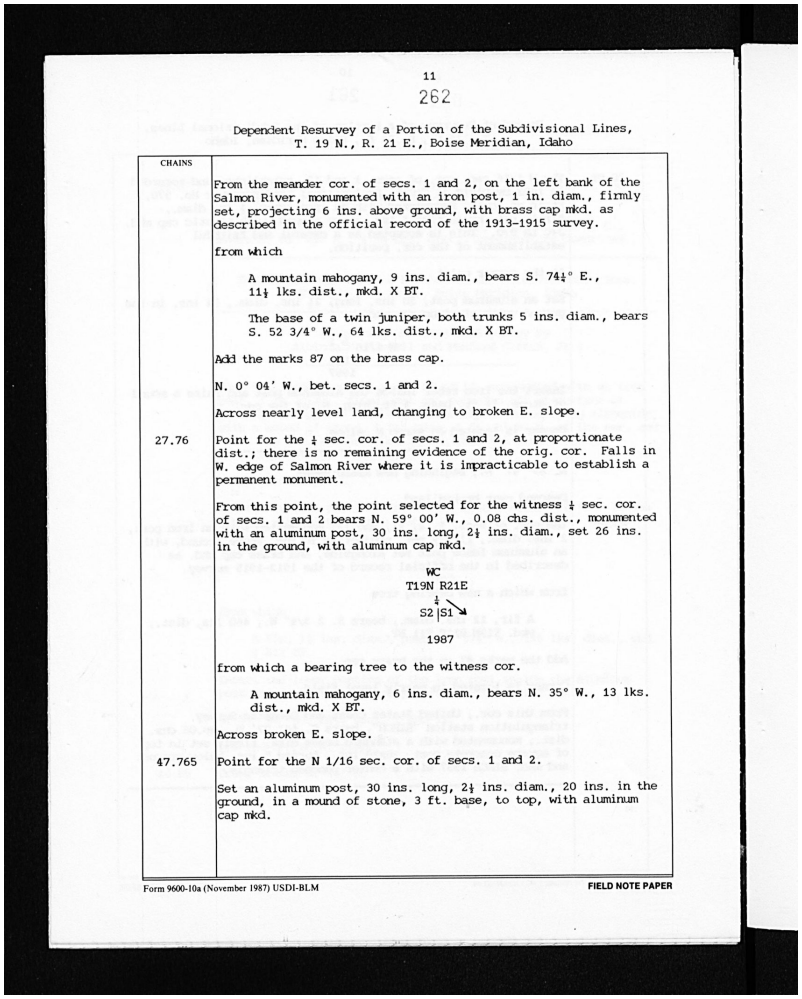

11

262

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 19 N., R. 21 E., Boise Meridian, Idaho

CHAINS

From the meander cor. of secs. 1 and 2, on the left bank of the Salmon River, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1913-1915 survey.

from which

A mountain mahogany, 9 ins. diam., bears S. 74½° E., 11½ lks. dist., mkd. X BT.

The base of a twin juniper, both trunks 5 ins. diam., bears S. 52 3/4° W., 64 lks. dist., mkd. X BT.

Add the marks 87 on the brass cap.

N. 0° 04' W., bet. secs. 1 and 2.

Across nearly level land, changing to broken E. slope.

27.76 Point for the ¼ sec. cor. of secs. 1 and 2, at proportionate dist.; there is no remaining evidence of the orig. cor. Falls in W. edge of Salmon River where it is impracticable to establish a permanent monument.

From this point, the point selected for the witness ¼ sec. cor. of secs. 1 and 2 bears N. 59° 00' W., 0.08 chs. dist., monumented with an aluminum post, 30 ins. long, 2½ ins. diam., set 26 ins. in the ground, with aluminum cap mkd.

WC
T19N R21E
¼
S2 | S1
1987

from which a bearing tree to the witness cor.

A mountain mahogany, 6 ins. diam., bears N. 35° W., 13 lks. dist., mkd. X BT.

Across broken E. slope.

47.765 Point for the N 1/16 sec. cor. of secs. 1 and 2.

Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.


Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 4 calls without a location
Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
70			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 21 E., Boise Meridian, Idaho				
71			Salmon River · From the meander cor. of secs. 1 and 2, on the left bank of the Salmon River, monumented with an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1913-1915 survey. from which A mountain mahogany, 9 ins. diam., bears S. 74½° E., 11½ lks. dist., mkd. X BT. The base of a twin juniper, both trunks 5 ins. diam., bears S. 52 3/4° W., 64 lks. dist., mkd. X BT.				
72		●	Add the marks 87 on the brass cap.				
73			N. 0° 04' W., bet. secs. 1 and 2.				
74		●	Across nearly level land, changing to broken E. slope.				
75	27.76	▲	**Cor. Secs. 1-2 · Point for the ¼ sec. cor. of secs. 1 and 2, at proportionate dist.; there is no remaining evidence of the orig. cor. Falls in W. edge of Salmon River where it is impracticable to establish a permanent monument. From this point, the point selected for the witness ¼ sec. cor. of secs. 1 and 2 bears N. 59° 00' W., 0.08 chs. dist., monumented with an aluminum post, 30 ins. long, 2½ ins. diam., set 26 ins. in the ground, with aluminum cap mkd. WC T19N R21E ¼ S2 | S1 1987 from which a bearing tree to the witness cor. A mountain mahogany, 6 ins. diam., bears N. 35° W., 13 lks. dist., mkd. X BT. Across broken E. slope.**				600700
76	47.77	○	**Cor. Secs. 1-2 · Point for the N 1/16 sec. cor. of secs. 1 and 2. Set an aluminum post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base, to top, with aluminum cap mkd.**				600700

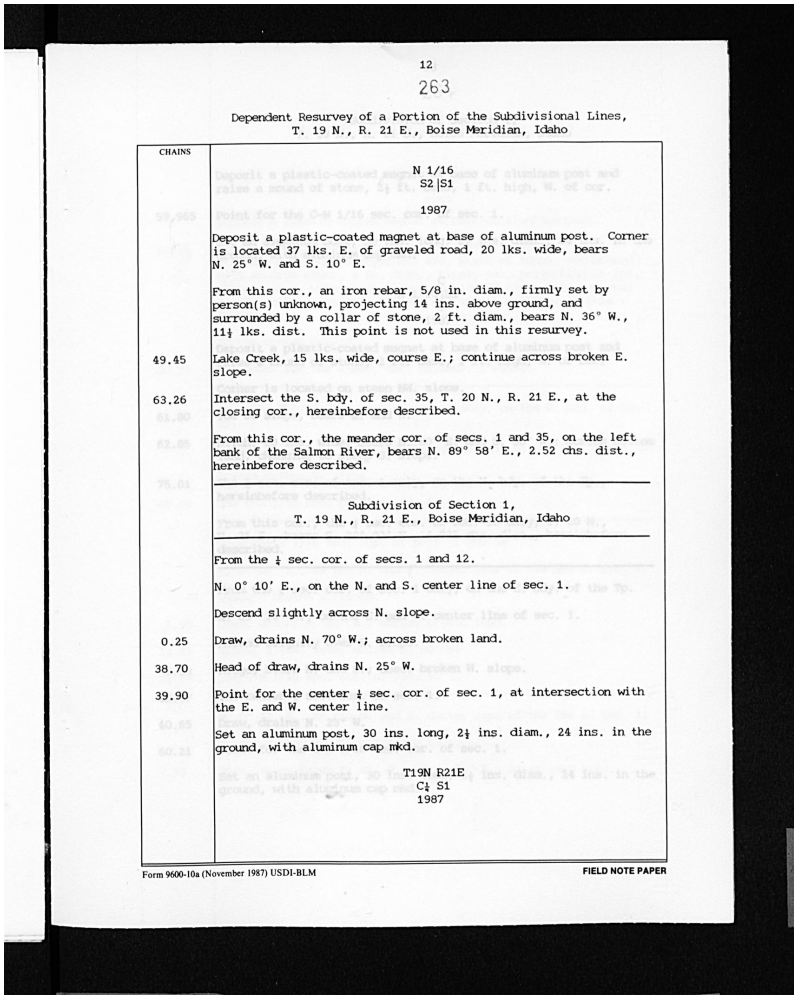

12

263

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 19 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
	N 1/16 S2 |S1 1987
	Deposit a plastic-coated magnet at base of aluminum post. Corner is located 37 lks. E. of graveled road, 20 lks. wide, bears N. 25° W. and S. 10° E.
	From this cor., an iron rebar, 5/8 in. diam., firmly set by person(s) unknown, projecting 14 ins. above ground, and surrounded by a collar of stone, 2 ft. diam., bears N. 36° W., 11½ lks. dist. This point is not used in this resurvey.
49.45	Lake Creek, 15 lks. wide, course E.; continue across broken E. slope.
63.26	Intersect the S. bdy. of sec. 35, T. 20 N., R. 21 E., at the closing cor., hereinbefore described.
	From this cor., the meander cor. of secs. 1 and 35, on the left bank of the Salmon River, bears N. 89° 58' E., 2.52 chs. dist., hereinbefore described.
	Subdivision of Section 1, T. 19 N., R. 21 E., Boise Meridian, Idaho
	From the ¼ sec. cor. of secs. 1 and 12.
	N. 0° 10' E., on the N. and S. center line of sec. 1.
	Descend slightly across N. slope.
0.25	Draw, drains N. 70° W.; across broken land.
38.70	Head of draw, drains N. 25° W.
39.90	Point for the center ¼ sec. cor. of sec. 1, at intersection with the E. and W. center line.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R21E C¼ S1 1987

Form 9600-10a (November 1987) USDI-BLM — FIELD NOTE PAPER


#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
77			Dependent Resurvey of a Portion of the Subdivisional Lines, T. 19 N., R. 21 E., Boise Meridian, Idaho				
78			N 1/16 S2 |S1 1987				
79	59.97	○	**Cor. Secs. 1-10 · Point for the C&t 1/16 sec. cor. sec. 1. Deposit a plastic-coated magnet at base of aluminum post. Corner is located 37 lks. E. of graveled road, 20 lks. wide, bears N. 25° W. and S. 10° E. From this cor., an iron rebar, 5/8 in. diam., firmly set by person(s) unknown, projecting 14 ins. above ground, and surrounded by a collar of stone, 2 ft. diam., bears N. 36° W., 11½ lks. dist. This point is not used in this resurvey.**				
80	49.45	●	Lake Creek, 15 lks. wide, course E. · Lake Creek, 15 lks. wide, course E.; continue across broken E. slope.				
81	63.26	△	**Intersect the S. bdy. of sec. 35, T. 20 N., R. 21 E., at the closing cor., hereinbefore described.**				
82		○	**From this cor., the meander cor. of secs. 1 and 35, on the left bank of the Salmon River, bears N. 89° 58' E., 2.52 chs. dist., hereinbefore described.**				
83			Subdivision of Section 1, T. 19 N., R. 21 E., Boise Meridian, Idaho				
84			From the ¼ sec. cor. of secs. 1 and 12.				
85			N. 0° 10' E., on the N. and S. center line of sec. 1.				
86		●	Descend slightly across N. slope.				
87	0.25	●	Draw, drains N. 70° W. · Draw, drains N. 70° W.; across broken land.				
88	38.70	●	Head of draw, drains N. 25° W.				
89	39.90	△	**¼ Cor. Sec. 1 N · Point for the center ¼ sec. cor. of sec. 1, at intersection with the E. and W. center line. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. T19N R21E C¼ S1 1987**				640700

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 8 calls without a location

Numbers match the text table; only this scan page is shown.

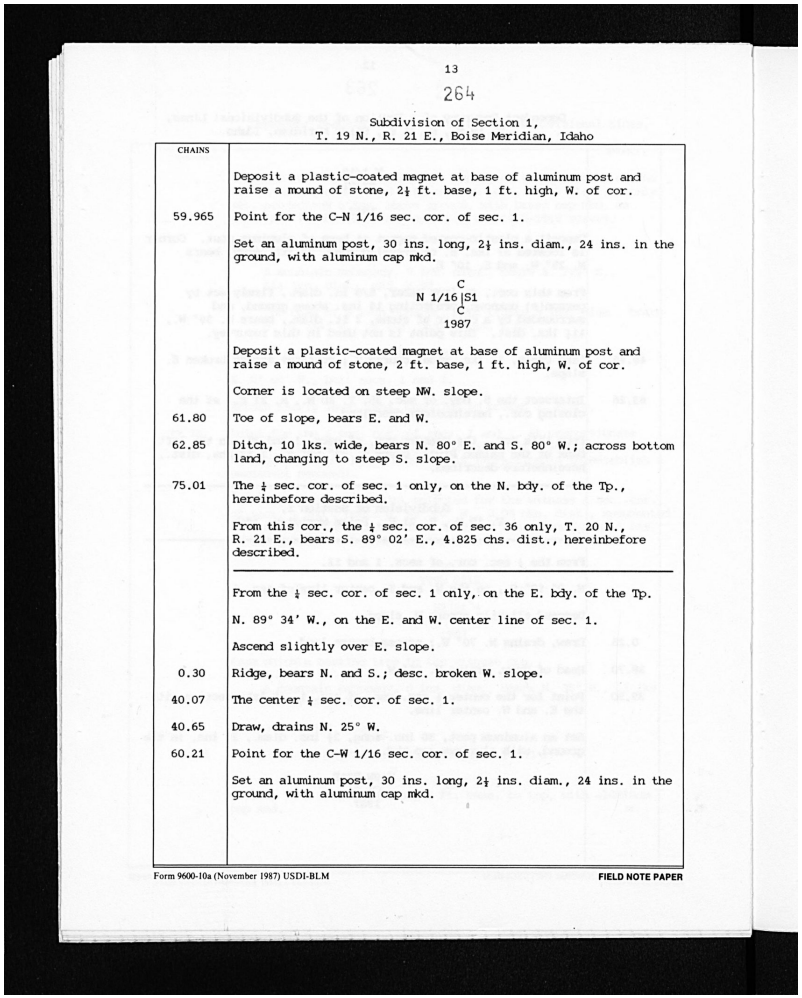

13

264

Subdivision of Section 1,
T. 19 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
	Deposit a plastic-coated magnet at base of aluminum post and raise a mound of stone, 2½ ft. base, 1 ft. high, W. of cor.
59.965	Point for the C-N 1/16 sec. cor. of sec. 1.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. C N 1/16|S1 C 1987
	Deposit a plastic-coated magnet at base of aluminum post and raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.
	Corner is located on steep NW. slope.
61.80	Toe of slope, bears E. and W.
62.85	Ditch, 10 lks. wide, bears N. 80° E. and S. 80° W.; across bottom land, changing to steep S. slope.
75.01	The ¼ sec. cor. of sec. 1 only, on the N. bdy. of the Tp., hereinbefore described.
	From this cor., the ¼ sec. cor. of sec. 36 only, T. 20 N., R. 21 E., bears S. 89° 02' E., 4.825 chs. dist., hereinbefore described.
	From the ¼ sec. cor. of sec. 1 only, on the E. bdy. of the Tp.
	N. 89° 34' W., on the E. and W. center line of sec. 1.
	Ascend slightly over E. slope.
0.30	Ridge, bears N. and S.; desc. broken W. slope.
40.07	The center ¼ sec. cor. of sec. 1.
40.65	Draw, drains N. 25° W.
60.21	Point for the C-W 1/16 sec. cor. of sec. 1.
	Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 10 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
90			Subdivision of Section 1, T. 19 N., R. 21 E., Boise Meridian, Idaho				
91		●	Deposit a plastic-coated magnet at base of aluminum post and raise a mound of stone, 2½ ft. base, 1 ft. high, W. of cor.				
92	59.97	○	**01CN16C · Point for the C-N 1/16 sec. cor. of sec. 1. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. C N 1/16|S1 C 1987 Deposit a plastic-coated magnet at base of aluminum post and raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor. Corner is located on steep NW. slope.**				640660
93	61.80	●	Toe of slope, bears E. and W.				
94	62.85	◕	Ditch, 10 lks. wide, bears N. 80° E. and S. 80° W. · Ditch, 10 lks. wide, bears N. 80° E. and S. 80° W.; across bottom land, changing to steep S. slope.				
95	75.01	▲	**Cor. Secs. 1-36 · The ¼ sec. cor. of sec. 1 only, on the N. bdy. of the Tp., hereinbefore described. From this cor., the ¼ sec. cor. of sec. 36 only, T. 20 N., R. 21 E., bears S. 89° 02' E., 4.825 chs. dist., hereinbefore described.**				640100
96			From the ¼ sec. cor. of sec. 1 only, on the E. bdy. of the Tp.				
97			N. 89° 34' W., on the E. and W. center line of sec. 1.				
98		●	Ascend slightly over E. slope.				
99	0.30	●	Ridge, bears N. and S.; desc. broken W. slope.				
100	40.07	△	**¼ Cor. Sec. 1 N · The center ¼ sec. cor. of sec. 1.**				640700
101	40.65	◕	Draw, drains N. 25° W.				
102	60.21	○	**01CW16C · Point for the C-W 1/16 sec. cor. of sec. 1. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd.**				620640

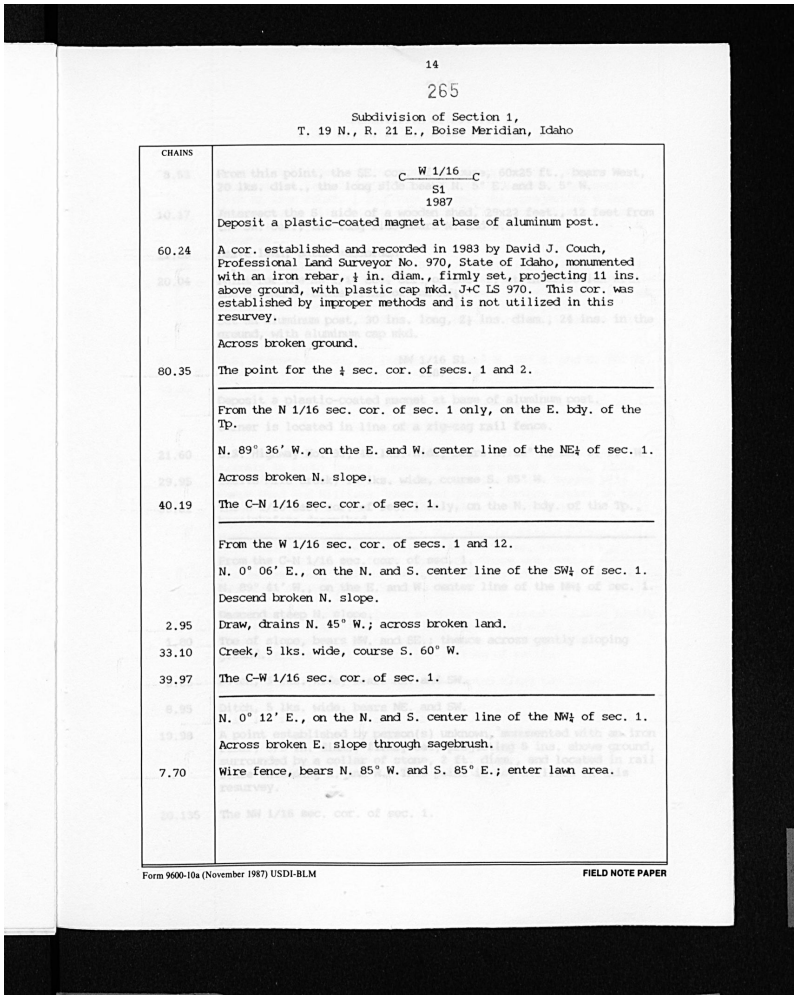

14

265

Subdivision of Section 1,
T. 19 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
	C W 1/16 C S1 1987
	Deposit a plastic-coated magnet at base of aluminum post.
60.24	A cor. established and recorded in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., firmly set, projecting 11 ins. above ground, with plastic cap mkd. J+C LS 970. This cor. was established by improper methods and is not utilized in this resurvey.
	Across broken ground.
80.35	The point for the ½ sec. cor. of secs. 1 and 2.
	From the N 1/16 sec. cor. of sec. 1 only, on the E. bdy. of the Tp.
	N. 89° 36' W., on the E. and W. center line of the NE¼ of sec. 1.
	Across broken N. slope.
40.19	The C-N 1/16 sec. cor. of sec. 1.
	From the W 1/16 sec. cor. of secs. 1 and 12.
	N. 0° 06' E., on the N. and S. center line of the SW¼ of sec. 1.
	Descend broken N. slope.
2.95	Draw, drains N. 45° W.; across broken land.
33.10	Creek, 5 lks. wide, course S. 60° W.
39.97	The C-W 1/16 sec. cor. of sec. 1.
	N. 0° 12' E., on the N. and S. center line of the NW¼ of sec. 1.
	Across broken E. slope through sagebrush.
7.70	Wire fence, bears N. 85° W. and S. 85° E.; enter lawn area.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
103			Subdivision of Section 1, T. 19 N., R. 21 E., Boise Meridian, Idaho				
104			From this point, the SE. C W 1/16 C 80x25 ft., bears West, 20 lks. dist., the long slope of 6, and S. [?] W. [?] S1 1987 [?] just from				
105		●	Deposit a plastic-coated magnet at base of aluminum post.				
106	60.24	△	**A cor. established and recorded in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., firmly set, projecting 11 ins. above ground, with plastic cap mkd. J+C LS 970. This cor. was established by improper methods and is not utilized in this resurvey.**				
107		●	Across broken ground.				
108	80.35	○	**Cor. Secs. 1-2 · The point for the ½ sec. cor. of secs. 1 and 2.**				600700
109			From the N 1/16 sec. cor. of sec. 1 only, on the E. bdy. of the Tp.				
110			N. 89° 36' W., on the E. and W. center line of the NE¼ of sec. 1.				
111		●	Across broken N. slope.				
112	40.19	○	**Cor. Secs. 1-6-7-12 · The C-N 1/16 sec. cor. of sec. 1.**				100600
113			From the W 1/16 sec. cor. of secs. 1 and 12.				
114			N. 0° 06' E., on the N. and S. center line of the SW¼ of sec. 1.				
115		●	Descend broken N. slope.				
116	2.95	◉	Draw, drains N. 45° W. · Draw, drains N. 45° W.; across broken land.				
117	33.10	◉	Creek, 5 lks. wide, course S. 60° W.				
118	39.97	○	**Cor. Secs. 1-12 · The C-W 1/16 sec. cor. of sec. 1.**				700600
119			N. 0° 12' E., on the N. and S. center line of the NW¼ of sec. 1.				
120		●	Across broken E. slope through sagebrush.				
121	7.70	○	**01NW16C · Wire fence, bears N. 85° W. and S. 85° E.; enter lawn area.**				620660
122		○	**01NW16C · The NW 1/16 sec. cor. of sec. 1.**				620660


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 13 calls without a location

Numbers match the text table; only this scan page is shown.

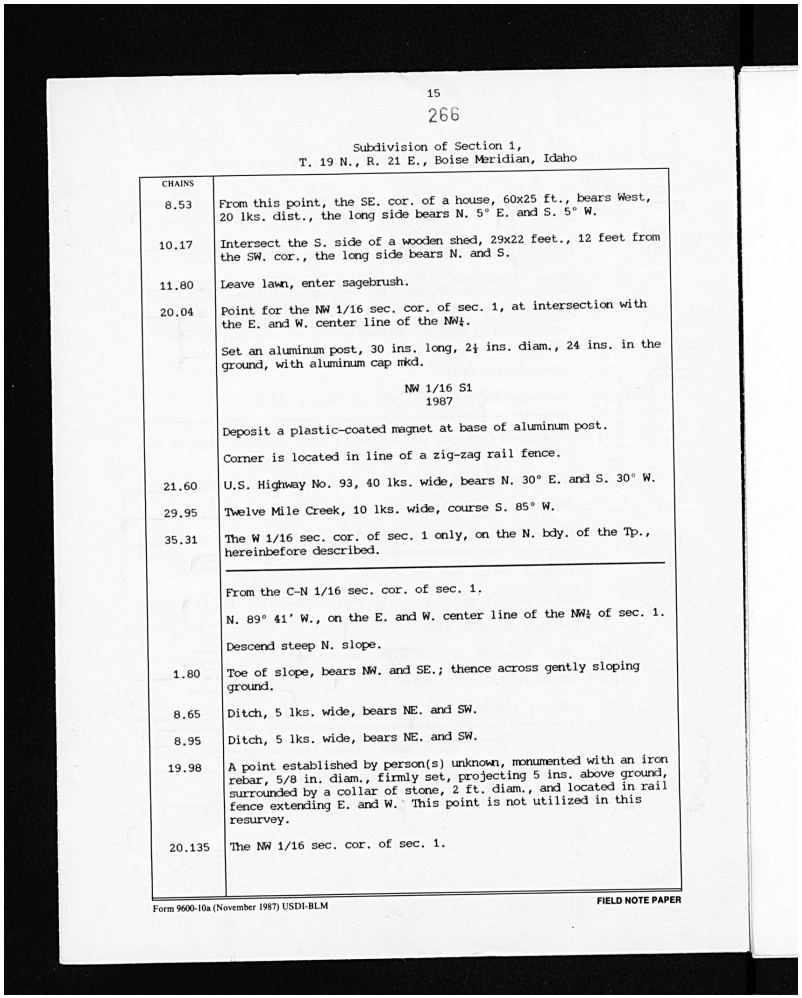

15

266

Subdivision of Section 1,
T. 19 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
8.53	From this point, the SE. cor. of a house, 60x25 ft., bears West, 20 lks. dist., the long side bears N. 5° E. and S. 5° W.
10.17	Intersect the S. side of a wooden shed, 29x22 feet., 12 feet from the SW. cor., the long side bears N. and S.
11.80	Leave lawn, enter sagebrush.
20.04	Point for the NW 1/16 sec. cor. of sec. 1, at intersection with the E. and W. center line of the NW¼. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. NW 1/16 S1 1987 Deposit a plastic-coated magnet at base of aluminum post. Corner is located in line of a zig-zag rail fence.
21.60	U.S. Highway No. 93, 40 lks. wide, bears N. 30° E. and S. 30° W.
29.95	Twelve Mile Creek, 10 lks. wide, course S. 85° W.
35.31	The W 1/16 sec. cor. of sec. 1 only, on the N. bdy. of the Tp., hereinbefore described.
	From the C-N 1/16 sec. cor. of sec. 1. N. 89° 41' W., on the E. and W. center line of the NW¼ of sec. 1. Descend steep N. slope.
1.80	Toe of slope, bears NW. and SE.; thence across gently sloping ground.
8.65	Ditch, 5 lks. wide, bears NE. and SW.
8.95	Ditch, 5 lks. wide, bears NE. and SW.
19.98	A point established by person(s) unknown, monumented with an iron rebar, 5/8 in. diam., firmly set, projecting 5 ins. above ground, surrounded by a collar of stone, 2 ft. diam., and located in rail fence extending E. and W. This point is not utilized in this resurvey.
20.135	The NW 1/16 sec. cor. of sec. 1.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
123			Subdivision of Section 1, T. 19 N., R. 21 E., Boise Meridian, Idaho				
124	8.53	●	From this point, the SE. cor. of a house, 60x25 ft., bears West, 20 lks. dist., the long side bears N. 5° E. and S. 5° W.				
125	10.17	●	Intersect the S. side of a wooden shed, 29x22 feet., 12 feet from the SW. cor., the long side bears N. and S.				
126	11.80	●	Leave lawn, enter sagebrush.				
127	20.04	◯	**01NW16C · Point for the NW 1/16 sec. cor. of sec. 1, at intersection with the E. and W. center line of the NW¼. Set an aluminum post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with aluminum cap mkd. NW 1/16 S1 1987 Deposit a plastic-coated magnet at base of aluminum post. Corner is located in line of a zig-zag rail fence.**				620660
128	21.60	■	U.S. Highway No. 93, 40 lks. wide, bears N. 30° E. and S. 30° W.				
129	29.95	●	Twelve Mile Creek, 10 lks. wide, course S. 85° W.				
130	35.31	◯	**Cor. Secs. 1-2 · The W 1/16 sec. cor. of sec. 1 only, on the N. bdy. of the Tp., hereinbefore described.**				
131			From the C-N 1/16 sec. cor. of sec. 1.				
132			N. 89° 41' W., on the E. and W. center line of the NW¼ of sec. 1.				
133		●	Descend steep N. slope.				
134	1.80	●	Toe of slope, bears NW. and SE.; thence across gently sloping ground.				
135	8.65	●	Ditch, 5 lks. wide, bears NE. and SW.				
136	8.95	●	Ditch, 5 lks. wide, bears NE. and SW.				
137	19.98	▲	**Cor. Secs. 1-2 · A point established by person(s) unknown, monumented with an iron rebar, 5/8 in. diam., firmly set, projecting 5 ins. above ground, surrounded by a collar of stone, 2 ft. diam., and located in rail fence extending E. and W. This point is not utilized in this resurvey.**				
138	20.14	◯	**The NW 1/16 sec. cor. of sec. 1.**				


PAGE SURVEY PLOT

N up

No reliable locations available for this page.

0 located symbols · 13 calls without a location

Numbers match the text table; only this scan page is shown.

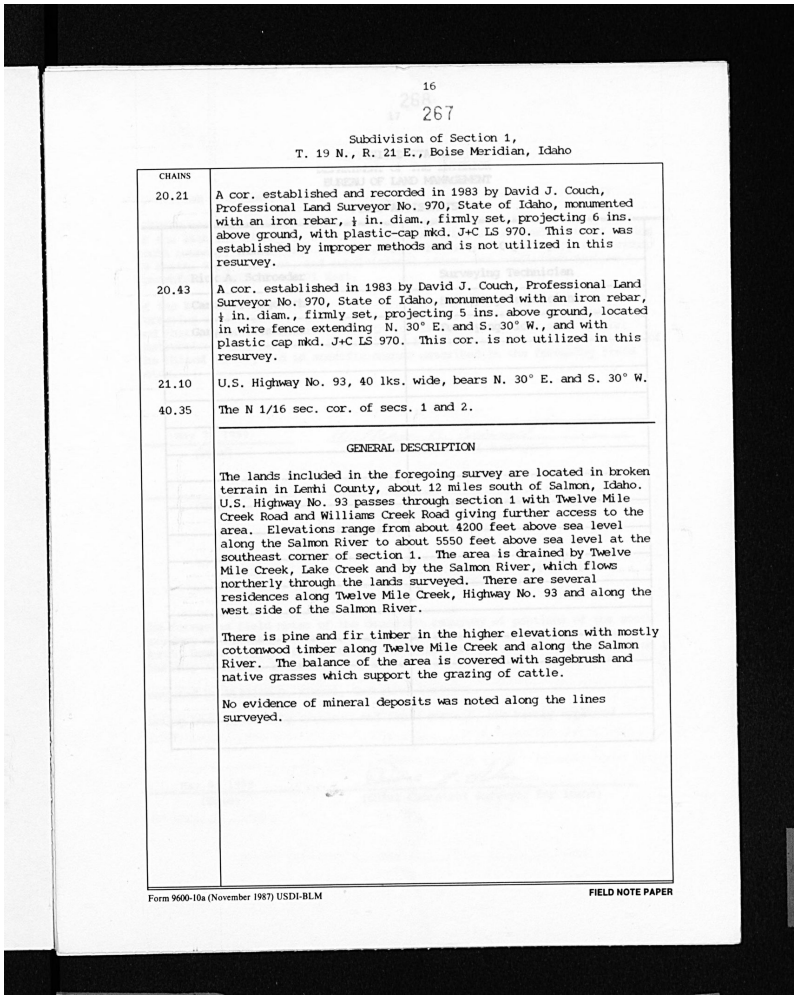

16

267

Subdivision of Section 1,
T. 19 N., R. 21 E., Boise Meridian, Idaho

CHAINS	
20.21	A cor. established and recorded in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., firmly set, projecting 6 ins. above ground, with plastic-cap mkd. J+C LS 970. This cor. was established by improper methods and is not utilized in this resurvey.
20.43	A cor. established in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., firmly set, projecting 5 ins. above ground, located in wire fence extending N. 30° E. and S. 30° W., and with plastic cap mkd. J+C LS 970. This cor. is not utilized in this resurvey.
21.10	U.S. Highway No. 93, 40 lks. wide, bears N. 30° E. and S. 30° W.
40.35	The N 1/16 sec. cor. of secs. 1 and 2.

GENERAL DESCRIPTION

The lands included in the foregoing survey are located in broken terrain in Lemhi County, about 12 miles south of Salmon, Idaho. U.S. Highway No. 93 passes through section 1 with Twelve Mile Creek Road and Williams Creek Road giving further access to the area. Elevations range from about 4200 feet above sea level along the Salmon River to about 5550 feet above sea level at the southeast corner of section 1. The area is drained by Twelve Mile Creek, Lake Creek and by the Salmon River, which flows northerly through the lands surveyed. There are several residences along Twelve Mile Creek, Highway No. 93 and along the west side of the Salmon River.

There is pine and fir timber in the higher elevations with mostly cottonwood timber along Twelve Mile Creek and along the Salmon River. The balance of the area is covered with sagebrush and native grasses which support the grazing of cattle.

No evidence of mineral deposits was noted along the lines surveyed.

Form 9600-10a (November 1987) USDI-BLM FIELD NOTE PAPER


PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 7 calls without a location

Numbers match the text table; only this scan page is shown.

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
139			Subdivision of Section 1, T. 19 N., R. 21 E., Boise Meridian, Idaho				
140	**20.21**	△	**A cor. established and recorded in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., firmly set, projecting 6 ins. above ground, with plastic-cap mkd. J+C LS 970. This cor. was established by improper methods and is not utilized in this resurvey.**				
141	**20.43**	△	**¼ Cor. Sec. 30 N · A cor. established in 1983 by David J. Couch, Professional Land Surveyor No. 970, State of Idaho, monumented with an iron rebar, ½ in. diam., firmly set, projecting 5 ins. above ground, located in wire fence extending N. 30° E. and S. 30° W., and with plastic cap mkd. J+C LS 970. This cor. is not utilized in this resurvey.**				**140300**
142	**21.10**	■	U.S. Highway No. 93, 40 lks. wide, bears N. 30° E. and S. 30° W.				
143	**40.35**	○	**Cor. Secs. 1-2 · The N 1/16 sec. cor. of secs. 1 and 2.**				**600700**
144			GENERAL DESCRIPTION				
145		■	The lands included in the foregoing survey are located in broken terrain in Lemhi County, about 12 miles south of Salmon, Idaho. U.S. Highway No. 93 passes through section 1 with Twelve Mile Creek Road and Williams Creek Road giving further access to the area. Elevations range from about 4200 feet above sea level along the Salmon River to about 5550 feet above sea level at the southeast corner of section 1. The area is drained by Twelve Mile Creek, Lake Creek and by the Salmon River, which flows northerly through the lands surveyed. There are several residences along Twelve Mile Creek, Highway No. 93 and along the west side of the Salmon River.				
146		●	There is pine and fir timber in the higher elevations with mostly cottonwood timber along Twelve Mile Creek and along the Salmon River. The balance of the area is covered with sagebrush and native grasses which support the grazing of cattle.				
147		●	No evidence of mineral deposits was noted along the lines surveyed.				

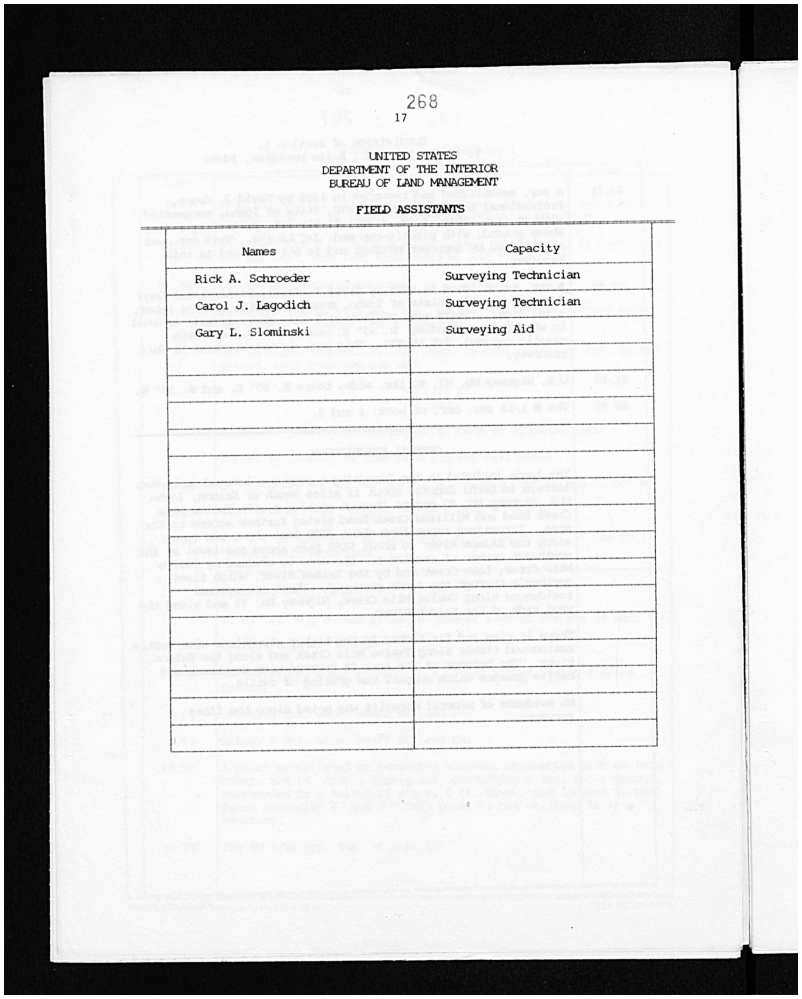

268
17

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS


Names	Capacity
Rick A. Schroeder	Surveying Technician
Carol J. Lagodich	Surveying Technician
Gary L. Slominski	Surveying Aid

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
14 8		●	268 17 UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT FIELD ASSISTANTS Names Capacity Rick A. Schroeder Surveying Technician Carol J. Lagodich Surveying Technician Gary L. Slominski Surveying Aid				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location
Numbers match the text table; only this scan page is shown.

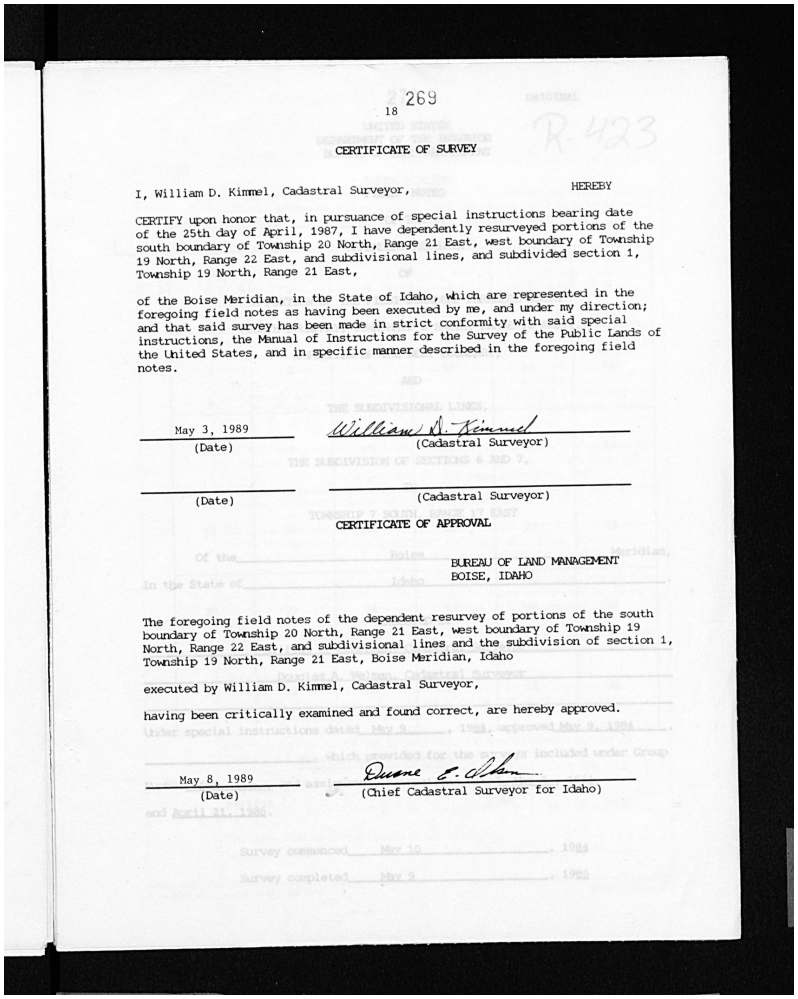

18 269

CERTIFICATE OF SURVEY

I, William D. Kimmel, Cadastral Surveyor, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th day of April, 1987, I have dependently resurveyed portions of the south boundary of Township 20 North, Range 21 East, west boundary of Township 19 North, Range 22 East, and subdivisional lines, and subdivided section 1, Township 19 North, Range 21 East,

of the Boise Meridian, in the State of Idaho, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 3, 1989 (Date) — William D. Kimmel (Cadastral Surveyor)

(Date) — (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
BOISE, IDAHO

The foregoing field notes of the dependent resurvey of portions of the south boundary of Township 20 North, Range 21 East, west boundary of Township 19 North, Range 22 East, and subdivisional lines and the subdivision of section 1, Township 19 North, Range 21 East, Boise Meridian, Idaho

executed by William D. Kimmel, Cadastral Surveyor,

having been critically examined and found correct, are hereby approved.

May 8, 1989 (Date) — Duane E. Olson (Chief Cadastral Surveyor for Idaho)

#	Ch	Type	Field Note Text	Elev	Links	Lat/Lon	GCDB
149		●	18 269 ORIGINAL R 423 CERTIFICATE OF SURVEY I, William D. Kimmel, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th day of April, 1987, I have dependently resurveyed portions of the south boundary of Township 20 North, Range 21 East, west boundary of Township 19 North, Range 22 East, and subdivisional lines, and subdivided section 1, Township 19 North, Range 21 East, of the Boise Meridian, in the State of Idaho, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes. THE SUBDIVISIONAL LINES, May 3, 1989 William D. Kimmel (Date) (Cadastral Surveyor) THE SUBDIVISION OF SECTIONS 6 AND 7, (Date) (Cadastral Surveyor) TOWNSHIP [?] [?] EAST CERTIFICATE OF APPROVAL Of the Boise BUREAU OF LAND MANAGEMENT In the State of Idaho BOISE, IDAHO The foregoing field notes of the dependent resurvey of portions of the south boundary of Township 20 North, Range 21 East, west boundary of Township 19 North, Range 22 East, and subdivisional lines and the subdivision of section 1, Township 19 North, Range 21 East, Boise Meridian, Idaho Daniel A. [?], Chief Cadastral Surveyor. executed by William D. Kimmel, Cadastral Surveyor, having been critically examined and found correct, are hereby approved. Under special instructions dated May 3 , 198[?], approved May 3, 198[?] which provided for the [?] included under Group May 8, 1989 Duane E. Olson (Date) (Chief Cadastral Surveyor for Idaho) and April 21, 1989. Survey commenced May 10 1988 Survey completed May 3 1989				

PAGE SURVEY PLOT N up

No reliable locations available for this page.

0 located symbols · 1 calls without a location

Numbers match the text table; only this scan page is shown.

Field Note Summary & Terrain Fraud Profile

SURVEY RUN SUMMARY

Sections 1 & 2 · N. 0° 04' W.

Benewah County, ID

START CORNER (ch 0.00)

Corner, Secs. 1, 2, 11 & 12

GCDB code: 600600

NOTABLE CALLS ALONG RUN

ch 0.25 Draw, drains N. 70° W. — Draw, drains N. 70° W.; across broken land.
ch 0.46 Corner, Secs. 1 & 12
ch 0.47 Quarter corner
ch 1.59 Corner, Secs. 35 & 36
ch 2.52 Corner, Secs. 1 & 8
ch 2.52 Corner, Secs. 1 & 2
ch 2.95 Draw, drains N. 45° W. — Draw, drains N. 45° W.; across broken land.
ch 3.75 Ravine, drains N. 70° W. — Ravine, drains N. 70° W.; across mountainous land, through scattered timber.
ch 4.83 Quarter corner
ch 7.70 1/16 corner, Sec. 1

END CORNER (ch 80.35)

1/16 corner, Secs. 1 & 2

GCDB code: 600700

66 total calls · 0 geo-located · 0 with elevation

TERRAIN FRAUD ANALYSIS

NONE

0 flags · 0 verifications

ELEVATION PROFILE · Sections: 1 · 2 · N. 0° 04' W.

Run Geolocate on this document to generate the elevation profile.